



# WOODINGS VERONA TOOL WORKS



SINCE 1873

VERONA • PENNSYLVANIA

*Catalogue 16*

# Woodings-Verona Tool Works

Verona, Pa., U. S. A.




Established 1873

SALES OFFICES—


ALL PRINCIPAL CITIES



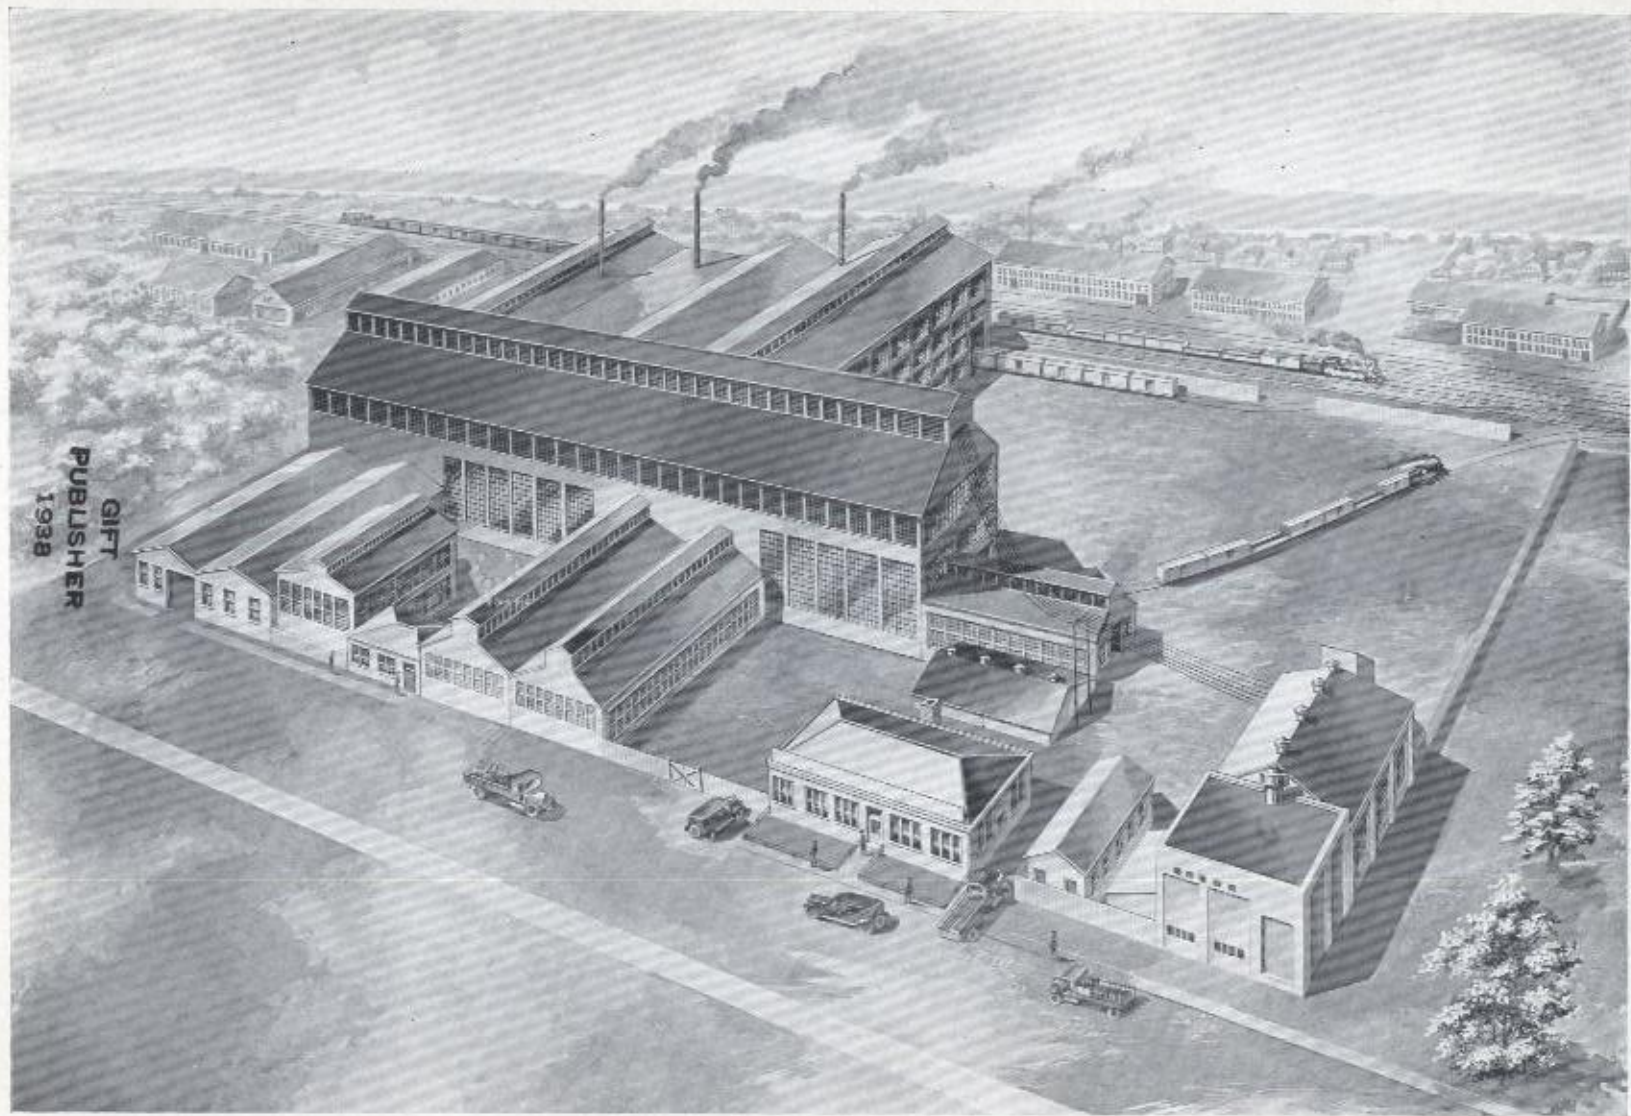

GIFT  
PUBLISHER  
1938

Woodings-Verona Tool Works, Verona, Penna.—Plant No. 1

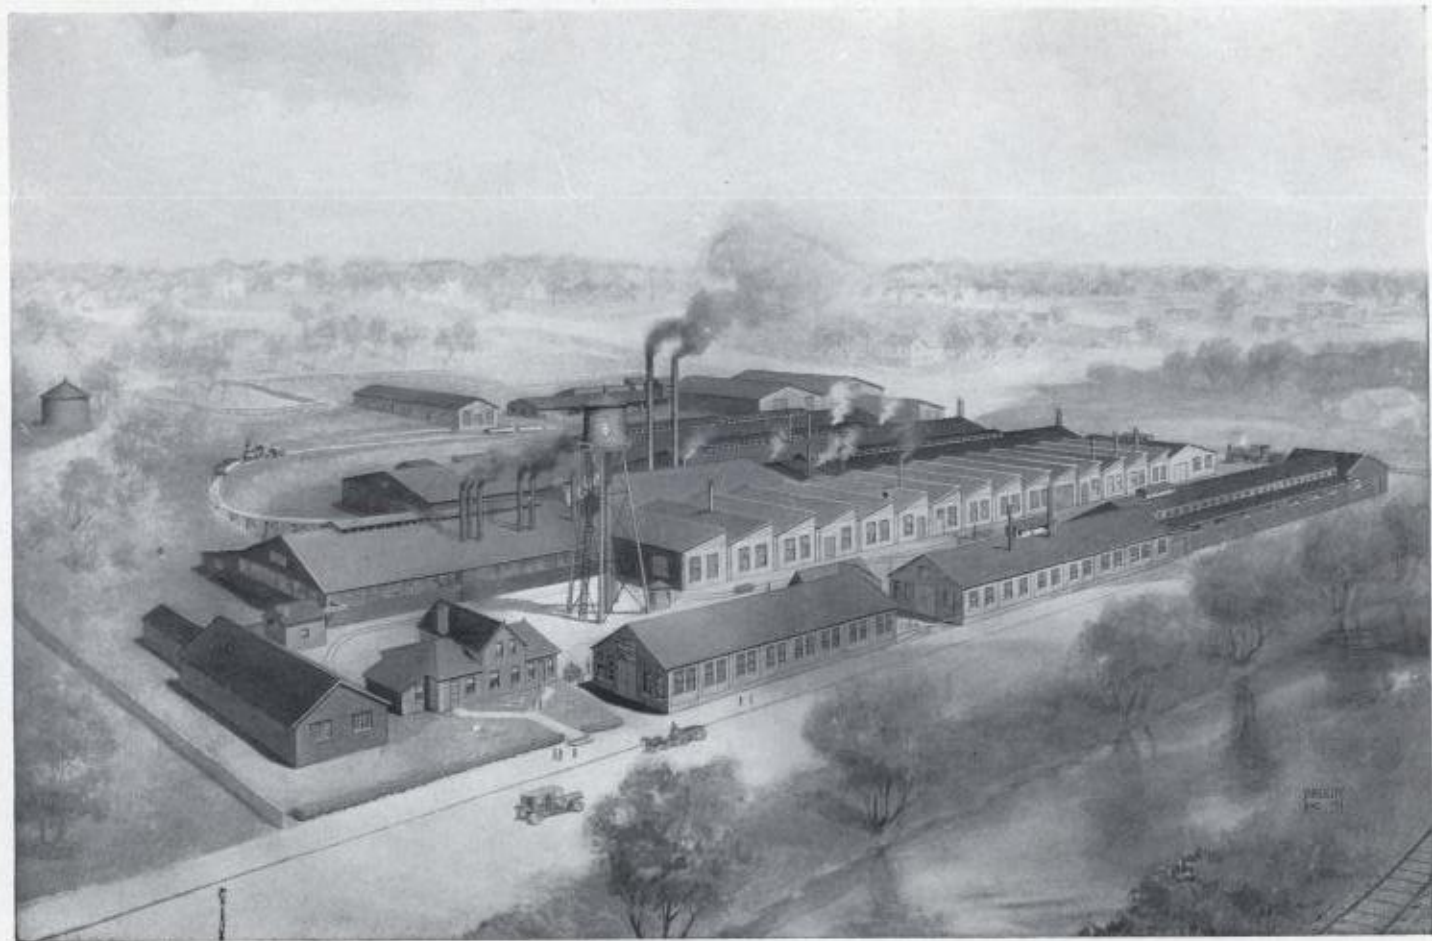

Woodings-Verona Tool Works, Verona, Penna.—Plant No. 2





## Verona Rail Joint Springs

**T**HE RAIL JOINT is the weakest portion of Track Structure. Unless properly maintained, the Rail Joint pumps, which causes rails to batter, distorts angle bars, destroys ties, causes heavy labor expenditure on the balance of the Track Structure and, in general, shortens the life of rail in track.

VERONA RAIL JOINT SPRINGS are distinguished by their high compressive capacity and their high reactive pressure through a wide range. The reaction of these Springs from 20,000 lbs. to 10,000 lbs. bolt tension is far superior to any device on the market. This superior reaction keeps the bolts tight and the angle bars in proper position, with plenty of reserved capacity, insuring adequate service over a long period of years, and prevents the rail joint from causing above mentioned conditions.

VERONA RAIL JOINT SPRINGS when properly applied, that is, the curves over the bolt holes pulled down to  $\frac{1}{8}$ " from being flat, will have a bolt tension of 20,000 lbs. This uniform pressure on each bolt in the Joint will permit free expansion and contraction of rail, which prevents the possibility of track buckling and stops the chipping of rail ends.

VERONA RAIL JOINT SPRINGS are not flat when properly applied, making them a shock absorber capable of compensating for movement of bars due to rolling load and lateral thrust.

VERONA RAIL JOINT SPRINGS are the only rail joint tightening device with which it is possible to positively govern pressure as the opening between the face of the angle bar and the under side of the Rail Joint Spring is a true index of the pressure on the bolt. It indicates to the trackman, when to stop wrenching. This is not possible with any type of helical spring washer as a trackman will pull down on a bolt equipped with a nutlock until he can pull no more, resulting in unknown and non-uniform pressure being applied to the bolts in the Rail Joint.

VERONA RAIL JOINT SPRINGS can be readily Salvaged in that there is practically no loss in reactive quality through years of service and they can be used with the same bars, bolts and rail when they are removed from main line to secondary track, and their efficiency will be the same as when originally applied. Due to the size of VERONA RAIL JOINT SPRINGS they will not become lost in ballast when the rail is uncoupled.

VERONA RAIL JOINT SPRINGS are cheaper than nutlocks when labor saving and the lengthening of track life of rail is considered.

When ordering VERONA RAIL JOINT SPRINGS please furnish angle bar blue print.



VERONA RAIL JOINT SPRING  
(Patented)





## INDEX

Cat. No.	Page	Cat. No.	Page
700 Adze, Full Head, Railroad A.R.E.A. Plan No. 12.....	33	105 Bender, Rail, Jim Crow.....	78
701 Adze, Carpenter's Half Head.....	33	704 Bender, Rail, Samson.....	78
702 Adze, Special Railroad, Clay Pick Eye.....	33	P-CB-1 Bit, Chisel, Wide, Pneumatic.....	72
703 Adze, Spanish Pattern, Round Eye.....	33	P-CB-2 Bit, Chisel, Wide, Pneumatic.....	72
705 Adze, Railroad, Clay Pick Eye, Full Head.....	33	P-CB-5 Bit, Chisel, Narrow, Pneumatic.....	72
54 Asphalt Cutter, Single Eye.....	34	P-CB-6 Bit, Chisel, Narrow, Pneumatic.....	72
55 Asphalt Cutter, Double Eye.....	34	P-DB-1 Blade, Digging, Pneumatic.....	72
P-AC-1 Asphalt Cutter, Pneumatic.....	71	P-DB-2 Blade, Digging, Pneumatic.....	72
P-AC-2 Asphalt Cutter, Pneumatic.....	71	P-M-1 Breaker, Concrete, Pneumatic.....	72
43 Axe, Stone.....	63	P-M-2 Breaker, Concrete, Pneumatic.....	72
		127 Buster, Rivet.....	59
		128 Button Set.....	59
		129 Button Set.....	59
4 Bar, Claw.....	26		
53 Bar, Claw.....	27	1Q Chisel, Track, "Veronalloy".....	20
80 Bar, Claw, A.R.E.A. Plan No. 11-A.....	27	1 Chisel, Track.....	21
80B Bar, Claw, A.R.E.A. Plan No. 11.....	27	2 Chisel, Track.....	21
81 Bar, Claw, Goose Neck.....	27	40 Chisel, Cold Cutting.....	22
84 Bar, Claw, Goose Neck.....	26	41 Chisel, Hot Cutting.....	22
85 Bar, Claw, Double End.....	26	75 Chisel, Foundry.....	22
33 Bar, Tamping.....	29	78 Chisel, Side.....	25
33½ Bar, Tamping, R.M.A., A.R.E.A. Plan No. 14.....	29	79 Chisel, Drift Bolt.....	25
86 Bar, End Tamping.....	29	401 Chisel, Car Repair.....	25
87 Bar, Tamping, Spade End.....	28	801 Chisel, Welders Hot Cutting.....	23
88 Bar, Tamping, Spear End A.R.E.A. Plan No. 15.....	28	73 Chisel, Chipping, Hand.....	24
P-TT-1 Bar, Tamping, Tie, Pneumatic.....	71	74 Chisel, Cape, Hand.....	24
141 Bar, Tamping, Diamond Tamping End.....	28	74A Chisel, Round Nose or Gouge, Hand.....	24
331 Bar, Tamping, Wooden Handle, Street Railway Use.....	28	74B Chisel, Diamond Point, Hand.....	24
800 Bar, Claw, End.....	68	Chisel, Flat, Pneumatic.....	70
31 Bar, Pinch, A.R.E.A., Plan No. 5.....	30	Chisel, Caulking, Pneumatic.....	70
32 Bar, Lining, Wedge Point, A.R.E.A. Plan No. 5.....	30	Chisel, Cape, Pneumatic.....	70
32A Bar, Lining, Diamond Point A.R.E.A. Plan No. 5.....	30	Chisel, Round Nose, Pneumatic.....	70
89 Bar, Locomotive Pinch.....	31	Chisel, Diamond Point, Pneumatic.....	70
90 Bar, Heel Pinch.....	31	Chisel, Beading, Pneumatic.....	70
91 Bar, Timber.....	32	Chisel, Gouge, Pneumatic.....	70
92 Bar, Buggy.....	32	Chisel, Blank, Pneumatic.....	70
93 Bar, Shackle.....	32	147 Chisel, Diamond Point, Stone.....	25
94 Bar, Post Hole Digging.....	31	150 Chisel, Double Hand.....	25
95 Bar, Digging.....	31	76 Chisel, Broom.....	24
132 Bar, Wrecking.....	67	511 Construction Wrench, Offset Jaw.....	69
146 Bar, Carpenter.....	67	511A Construction Wrench, Ribbed Jaw.....	69
57 Bender, Rail, Eccentric.....	79	54 Cutter, Asphalt, Single Eye.....	34
138 Bender, Rail, Eccentric, Girder and Guard Rail.....	79	55 Cutter, Asphalt, Double Eye.....	34
139 Bender, Rail, Eccentric, Roller.....	80	P-AC-1 Cutter, Asphalt, Pneumatic.....	71
		P-AC-2 Cutter, Asphalt, Pneumatic.....	71
		P-CB-1 Chisel Bit, Wide, Pneumatic.....	72
		P-CB-2 Chisel Bit, Wide, Pneumatic.....	72
		P-CB-5 Chisel Bit, Narrow, Pneumatic.....	72
		P-CB-6 Chisel Bit, Narrow, Pneumatic.....	72
		130 Drift Pin, Plug or Taper Type.....	69



Cat. No.	Page	Cat. No.	Page
130A Drift Pin, Barrel Type.....	69	152 Hardie.....	62
P-DB-1 Digging Blade, Pneumatic.....	72	151 Heading Tool.....	62
P-DB-2 Digging Blade, Pneumatic.....	72	161 Hoe, Vineyard.....	37
148 Drill, Stone, Double Bit.....	57	162 Hoe, Grub.....	37
149 Drill, Stone, Single Bit.....	57	163 Hoe, Hazel.....	37
806 Drill, Plug, Hand.....	57	164 Hoe, Accomac.....	37
135 End, Tamping Pick.....	68	133 Hook, Packing.....	67
800 End, Claw Bar.....	68	120 Hook, Logging.....	65
Eyes, Pick.....	36		
35 Fork, Rail A.E.R.A. Plan No. 10.....	65	1A Jack, Track, Single Acting.....	16
802 Flatter, Blacksmith, Square.....	23	2A Jack, Track, Single Acting.....	16
158 Froe, Cooper.....	37	3 Jack, Track, Double Acting.....	17
38 Fuller, Top.....	61	4 Jack, Track, Double Acting.....	17
39 Fuller, Bottom.....	61	6 Jack, Track, Baby, Single Acting.....	18
		7 Jack, Track, Single Acting.....	19
		8 Jack, Track, Single Acting.....	19
1 Gauge, Track, Solid Steel.....	76	134 Knife, Packing.....	67
2 Gauge, Track, Pipe Center, Insulated.....	76		
3 Gauge, Track, Pipe Center, Non-Insulated.....	76	1 Level & Gauge, Track.....	74
4 Gauge, Track, Wood Center.....	76	2 Level, Track.....	74
5 Gauge, Track, Wood Center, Guard Rail Lug.....	77	3 Level, Track.....	74
6 Gauge, Track, Wood Center, Radius.....	77	119 Level, Track, Step Board.....	74
7 Gauge, Track, Wood Center, Street Railway.....	77	10 Level & Gauge, Inspector's.....	73
8 Gauge, Track, Pipe Center, Guard Rail Lug.....	77		
10 Gauge and Level, Inspector's (Patented).....	73	106 Mattock, Cutter.....	35
17 Gauge, Pipe Center, Insulated, Guard Rail Lug, A.R.E.A. Plan No. 20.....	75	107 Mattock, Pick.....	35
126 Gouge, Handle.....	59	4 Maul, Spike, Bell Pattern A.R.E.A. No. 1, Plan No. 3.....	52
8 Hammer, Napping.....	47	5 Maul, Spike, Bell Pattern A.R.E.A. No. 2, Plan No. 3.....	52
10 Hammer, Single Face Spalling.....	47	6 Maul, Spike Railroad or Club Pattern.....	52
11 Hammer, Double Face Spalling.....	47	47 Maul, Wood Choppers, Straight Bit.....	53
14 Hammer, Hand Drilling.....	51	72 Maul Wood Choppers (Oregon Pattern).....	53
159 Hammer, Bush.....	46	72½ Maul, Wood Choppers, (Oregon Axe Eye.....	53
16M Hammer, Striking, Missouri Pattern.....	46	58 Maul Ship or Top.....	53
10M Hammer, Mason.....	46	P-M1 Moil Point, Pneumatic.....	72
160 Hammer, Scaling.....	46	P-M-2 Moil Point, Pneumatic.....	72
155 Hammer, Set.....	62		
602 Hammer, Paving.....	63	Nutlocks, Carbon.....	13
116 Hammer, Brick Layers.....	63	Nutlocks, Verona "Special" Alloy.....	14
16 Hammer, Double Face Striking.....	51		
52 Hammer, Double Face Striking.....	51	2 Picks, Tamping "V" End A.R.E.A. Plan No. 2.....	39
60 Hammer, Blacksmith, Hand.....	50	3 Pick, Tamping "T" End.....	40
111 Hammer, Riveting.....	50	7 Pick, Clay A.R.E.A. Plan No. 1.....	39
113 Hammer, Engineer's, Single Face.....	50	17 Pick, Contractors (Diamond Point).....	40
114 Hammer, Engineer's, Double Face.....	50	22 Pick, Drifting (San Juan Mining).....	41
		23 Pick, Stone.....	42
		24 Pick, Poll or Ore Hammer.....	43





Cat. No.	Page	Cat. No.	Page
25 Pick, Quarry.....	42	128 Set, Button.....	59
26 Pick, Locomotive.....	44	129 Set, Button.....	59
26A Pick, Locomotive.....	44	P-BS-5 Spade, Breaking, Pneumatic.....	71
49 Pick, Iron Mining.....	44	P-BS-6 Spade, Breaking, Pneumatic.....	71
50 Pick, Iron Mining.....	44	P-S-1 Spade, Clay, Pneumatic.....	71
62 Pick, Prospector's.....	43	P-S-2 Spade, Clay, Pneumatic.....	71
97 Pick, Eyeless Clay.....	45	156 Swages, Top.....	61
98 Pick, Eyeless Tamping.....	45	157 Swages, Bottom.....	61
99 Pick, Rock or Quarry, Diamond Point.....	40		
100 Pick, Drifting, Langley Pattern.....	41	66 Tongs, Pick.....	60
101 Pick, Drifting, Yukon Pattern.....	41	67 Tongs, Gad, Flat Jaw.....	60
103 Pick, Concrete.....	42	68 Tongs, Straight Lip.....	60
142 Pick, Tamping, Diamond Stone.....	45	121 Tongs, Sticker.....	60
143 Pick, Eyeless Tamping, Diamond Stone.....	45	122 Tongs, Single Pick Up.....	60
17Y Pick, Contractor, Yankee Pattern.....	38	123 Tongs, Double Pick Up.....	60
7D Pick, Railroad, Double Pointed.....	38	69 Tongs, Rivet.....	61
7W Pick, Railroad, Wide Chisel End.....	38	136 Tongs, Bolt or Curved Lip.....	61
160 Pick, Boiler.....	46	120 Tongs, Timber.....	65
102 Pick, Mill.....	46	34 Tongs, Rail.....	65
135 Pick, End.....	68	34A Tongs, Tie, Two Man.....	66
154 Punch, Square End.....	62	34B Tongs, Tie, One Man.....	66
153 Punch, Round End.....	62	34C Tongs, Tie, One Man, Side Lug.....	66
29 Punch, Track, Square Point.....	58		
29A Punch, Track Tie Plug.....	58	51 Wrench, Track, Single End, Round Handle.....	64
36 Punch, Track, Round Point.....	58	510 Wrench, Track, Single End Flat Handle.....	64
125 Punch, Backing Out.....	58	512 Wrench, Track, Double End, Flat Handle.....	64
56 Puller, Spike.....	68	511 Wrench, Construction, Offset Jaw.....	69
130 Pin, Drift, Plug or Taper Type.....	69	511A Wrench, Construction, Ribbed Jaw.....	69
130A Pin, Drift, Barrell Type.....	69	514 Wrench, Car Repair "S".....	64
134 Packing Knife.....	67	27 Wedge, Truckee.....	55
P-M-1 Point, Moil, Pneumatic.....	72	110 Wedge, Falling, Lake Superior.....	56
P-M-2 Point, Moil, Pneumatic.....	72	804 Wedge, Rock.....	56
PNEUMATIC TOOLS.....		803 Wedge, Frost.....	56
Small Gun Tools.....	70	112 Wedge, Cedar Splitting.....	56
Large Gun Tools.....	71	109 Wedge, Bucking, Pacific Coast.....	56
Large Gun Tools.....	72	30 Wedge, Stone.....	55
127 Rivet Buster.....	59	65 Wedge, Common or Square Head.....	54
		70 Wedge, Truckee, Flared Bit.....	55
12 Sledge, Stone (Cutting Edge.....	48	70A Wedge, Falling.....	55
13 Sledge, Stone.....	48	71 Wedge, Splitting, Oregon Pattern.....	55
15 Sledge, Blacksmith, Double Face.....	48	82 Wedge, Stave.....	54
28 Sledge, Blacksmith, Straight or Cross Pein.....	49	83 Wedge, Tie.....	54
44 Sledge, Ore.....	49	115 Wedge, Saw, Improved.....	54
108 Sledge, Moulders.....	49	Washers, Spring, Carbon.....	13
117 Skutch, Bricklayers.....	63	Washers, Spring, Verona "Special" Alloy.....	14
56 Spike Puller.....	68		



THE VERONA TRADEMARK  
An Assurance of Highest Quality





## Verona Nut Locks

**T**HE steel used in the manufacture of VERONA NUT LOCKS is made to a special formula.

Each heat is analyzed in our laboratory before the steel is used.

Uniformity in the heat treatment and tempering of VERONA NUT LOCKS assures their high quality.

Every nut lock must stand a full compression test, in automatic testing machines, before shipment. The purchaser is thereby guaranteed that only first grade, high quality nut locks are shipped.


VERONA NUT LOCKS are made in the following styles:

- No. 1. Regular pattern. Made in sizes for  $\frac{1}{8}$ -inch to 2 inch bolts.
  - No. 2. Tail pattern. Made in sizes for  $\frac{3}{4}$ -inch to  $1\frac{1}{4}$ -inch bolts.
  - No. 3. Medium wide— $\frac{1}{4}$ -inch wide x  $\frac{3}{8}$ -inch thick steel section. Made in sizes for  $\frac{3}{4}$ -inch to  $1\frac{1}{4}$ -inch bolts.
  - No. 5. Broad or parallel pattern— $\frac{3}{8}$ -inch wide  $\frac{1}{4}$ -inch thick steel section. Made in sizes for  $\frac{3}{4}$  inch to 2-inch bolts.
  - No. 6.  $\frac{3}{8}$ -inch square steel section. High tension. Made in sizes for  $\frac{3}{4}$ -inch bolts and up.
- All Nut Locks tempered in oil and tested separately.

When ordering nut locks please specify outside diameter of bolt thread line and pattern or type of Nut Lock desired.

Width of Nut Lock is measurement at right angles to axis of bolt.

Thickness of Nut Lock is measurement parallel to axis of bolt.

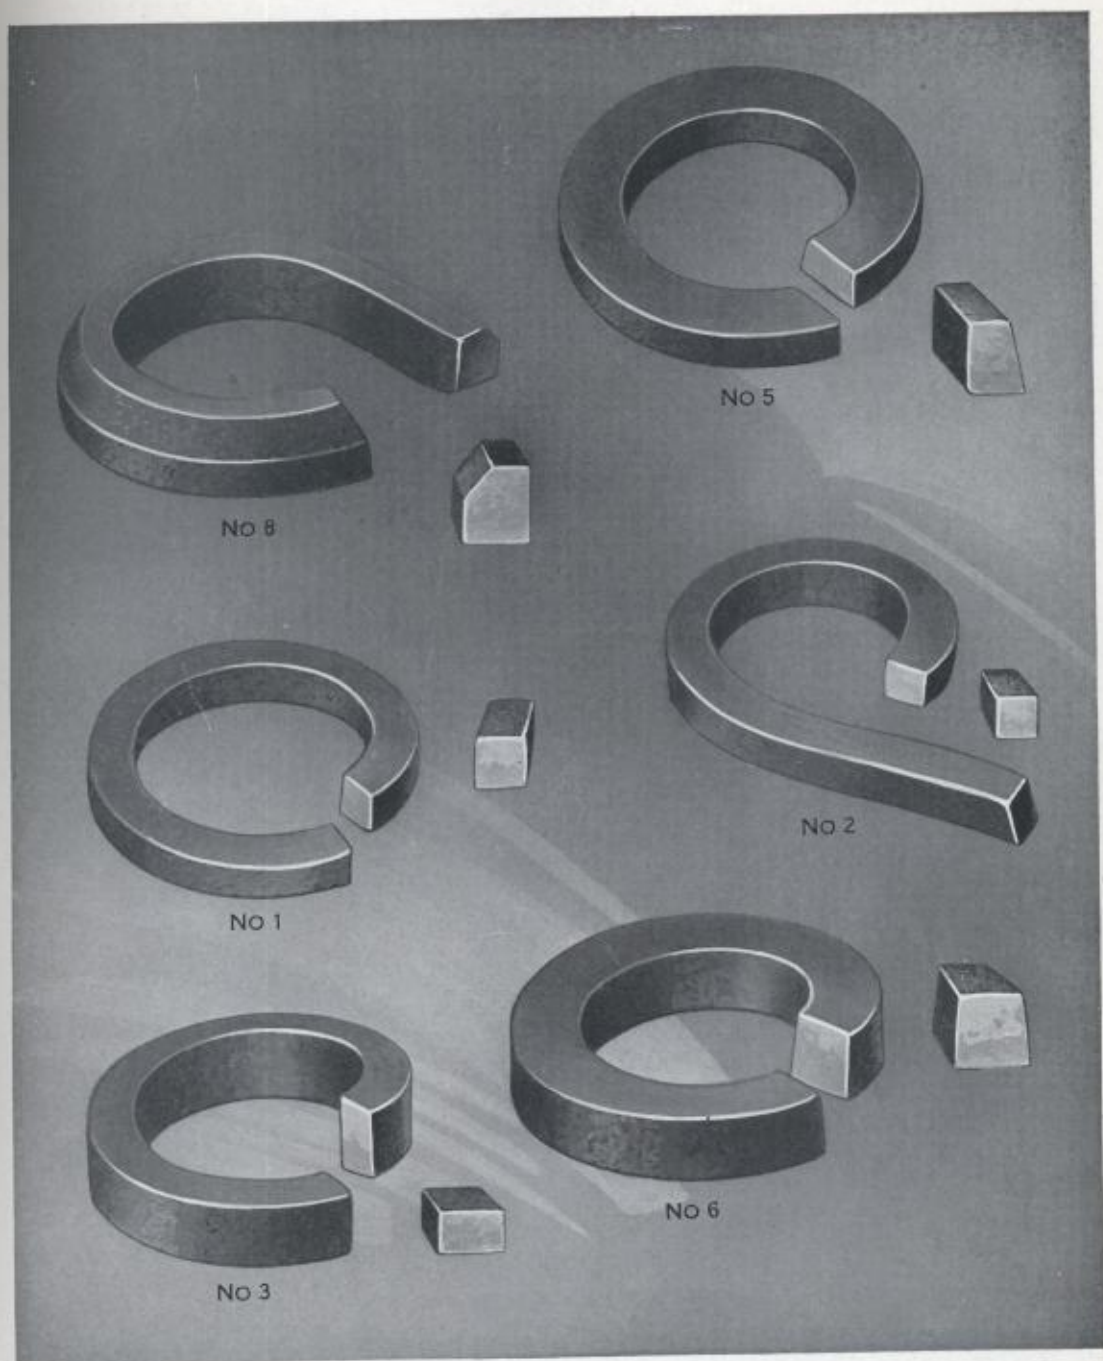


#### TYPES OF VERONA NUT LOCKS

No. 3. Pattern Discontinued.





## Verona "Special" Alloy Nutlocks

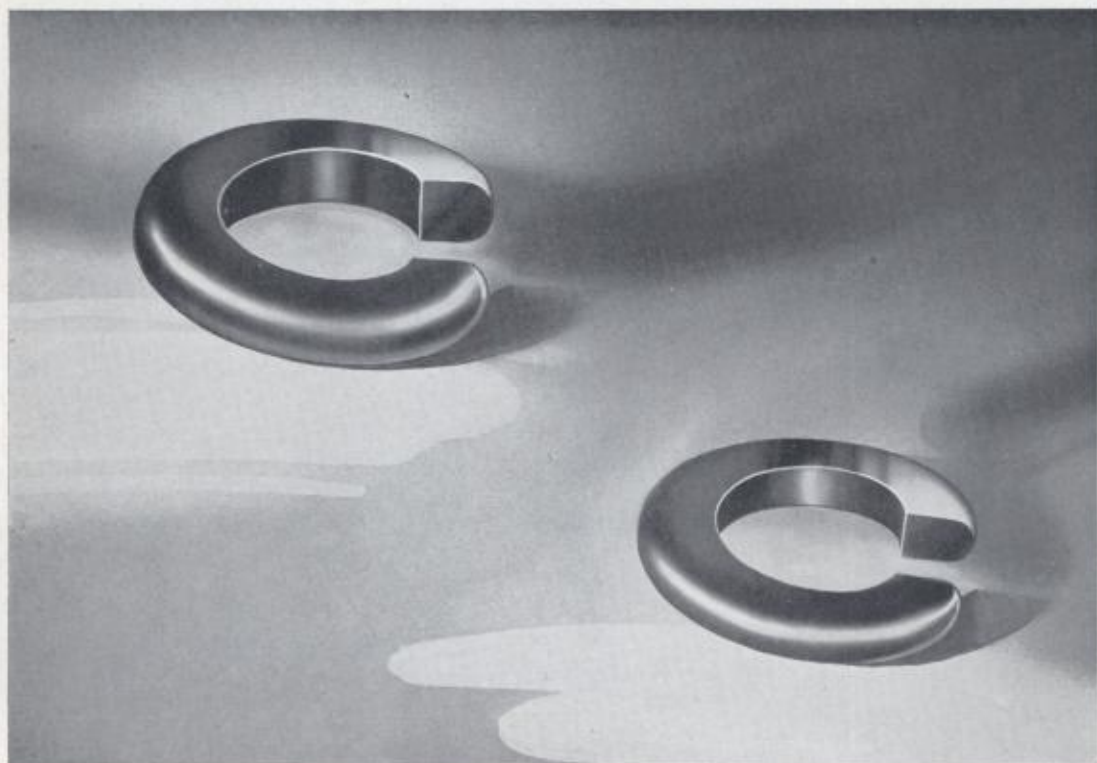

**V**ERONA SPECIAL ALLOY NUTLOCKS are produced from Veronalloy steel which, after lengthy experiments in both laboratory and field, proved most suitable in that it is non-fatiguing, thereby maintaining great bolt tension through wide reactive range. This maintenance of bolt tension keeps rail joint assembly in proper condition, reducing angle bar wear and rail batter, as well as eliminates necessity for periodical tightening of bolts and joint tamping.

Furnished for all sizes of track bolts in the following steel sections:

$\frac{7}{16}$ " wide x  $\frac{1}{4}$ " thick  
 $\frac{7}{16}$ " wide x  $\frac{3}{8}$ " thick  
 $\frac{13}{32}$ " wide  $\frac{15}{32}$ " thick (A. R. E. A. Specification)

When ordering VERONA SPECIAL ALLOY NUTLOCKS state bolt diameter over thread line.



Nutlocks Pioneered 1873



## **Verona Track Jacks**

**A**LL materials used in VERONA TRACK JACKS are the best obtainable. The frames are malleable iron, the square socket levers are cast steel and the pawls, rack bar and catches are made from tool steel and are drop forged and heat treated.

The trip is POSITIVE and INSTANTANEOUS, and consequently, is safe.

The pawl and fulcrum pins are stationary—no sleeves or bushings required.

VERONA TRACK JACKS have only four wearing parts, which can be renewed on the job without the necessity of sending them into the shop.

VERONA TRACK JACKS are manufactured in single and double action types, with a lifting range from 5 inches to 17 inches as illustrated in the following pages.

They maintain the exacting requirements of VERONA quality.





### No. 1A Track Jack

Single acting—Quick trip.

Weight—65 pounds.

Square Socket for Lining Bar.

Height of Jack with Rack Bar down,  
21 inches.

Capacity 15 tons—Lift 13 inches.

Parts interchangeable with No. 2A.

$\frac{1}{2}$ -inch or  $\frac{3}{4}$ -inch Rack Bar Lift—Specify Desire.

### No. 2A Track Jack

Single acting—Quick trip.

Weight—75 pounds.


Square Socket for Lining Bar.

Height of Jack with Rack Bar down,  
25 inches.

Capacity 15 tons—Lift 17 inches.

A Jack adapted especially for lifting frogs  
and crossovers or where high lift is  
desired.

Parts interchangeable with No. 1A.

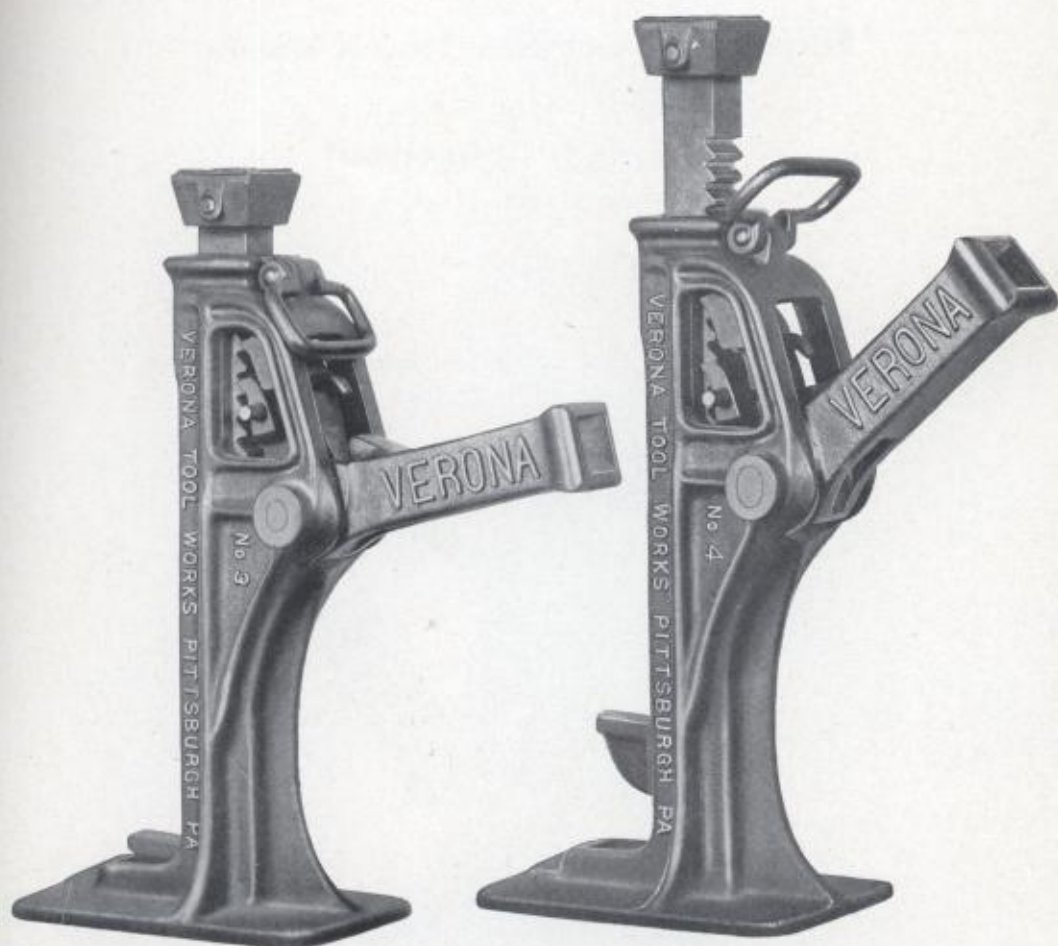

### No. 3 Track Jack

Double acting—Quick trip.

Weight—65 pounds.

Rack Bar— $\frac{3}{16}$ -inch lift with each upward or downward movement of lever.

Square Socket for Lining Bar.

Height of Jack with Rack Bar down, 21 inches.

Capacity 15 tons—Lift 13 inches.

The most efficient double acting, quick trip Track Jack on the market.

Parts interchangeable with No. 4.

### No. 4 Track Jack

Double acting—Quick trip.

Weight—75 pounds.

Rack Bar— $\frac{5}{16}$ -inch lift with each upward or downward movement of lever.

Square Socket for Lining Bar.

Height of Jack with Rack Bar down, 25 inches.

Capacity 15 tons—Lift 17 inches.

A double acting, quick trip Jack for use where high lift is desired.

Parts interchangeable with No. 3.

*Write for special Jack circular*





## Improved Verona Track Jacks

### VERONA BABY GIANT SINGLE ACTING TRACK JACK



Note notch in rack bar to fit rail flange so Jack may be used as Track Liner.



CAPACITY 15 TONS

#### NO. 6

Weight . . . . .	43 pounds
Height Rack Bar Down . . . . .	10½ inches
Extreme Height . . . . .	15½ inches
Total Lift . . . . .	5 inches
Rack Bar Lift . . . . .	½ inch

The best Jack for track surfacing and picking up low joints



## Improved Verona Track Jacks

### VERONA IMPROVED SINGLE ACTING TRACK JACKS



CAPACITY 15 TONS

	No. 7	No. 8
Weight . . . . .	64 pounds	72 pounds
Height Rack Bar Down . . . . .	21 inches	25 inches
Total Lift . . . . .	13 inches	17 inches
Rack Bar Lift . . . . .	$\frac{1}{2}$ inch	$\frac{1}{2}$ inch

Three teeth on both catch and lifting pawl assure long life and safety.




### **“Veronalloy” 1Q Chisel**

**A.R.E.A. PLAN NO. 17, DESIGN 2**


Designed for longer service; the VERONALLOY Chisel permits resharpener and redressing many times. Point tempered sufficient distance to permit regriading during entire life of chisel eliminating necessity for retempering in field. A safe, economical chisel, made of special electric furnace alloy steel. Painted VERONALLOY green to distinguish it as a member of the VERON-ALLOY line of high quality, extra service tools. Weight  $5\frac{1}{2}$  pounds. Length  $10\frac{1}{2}$  inches.



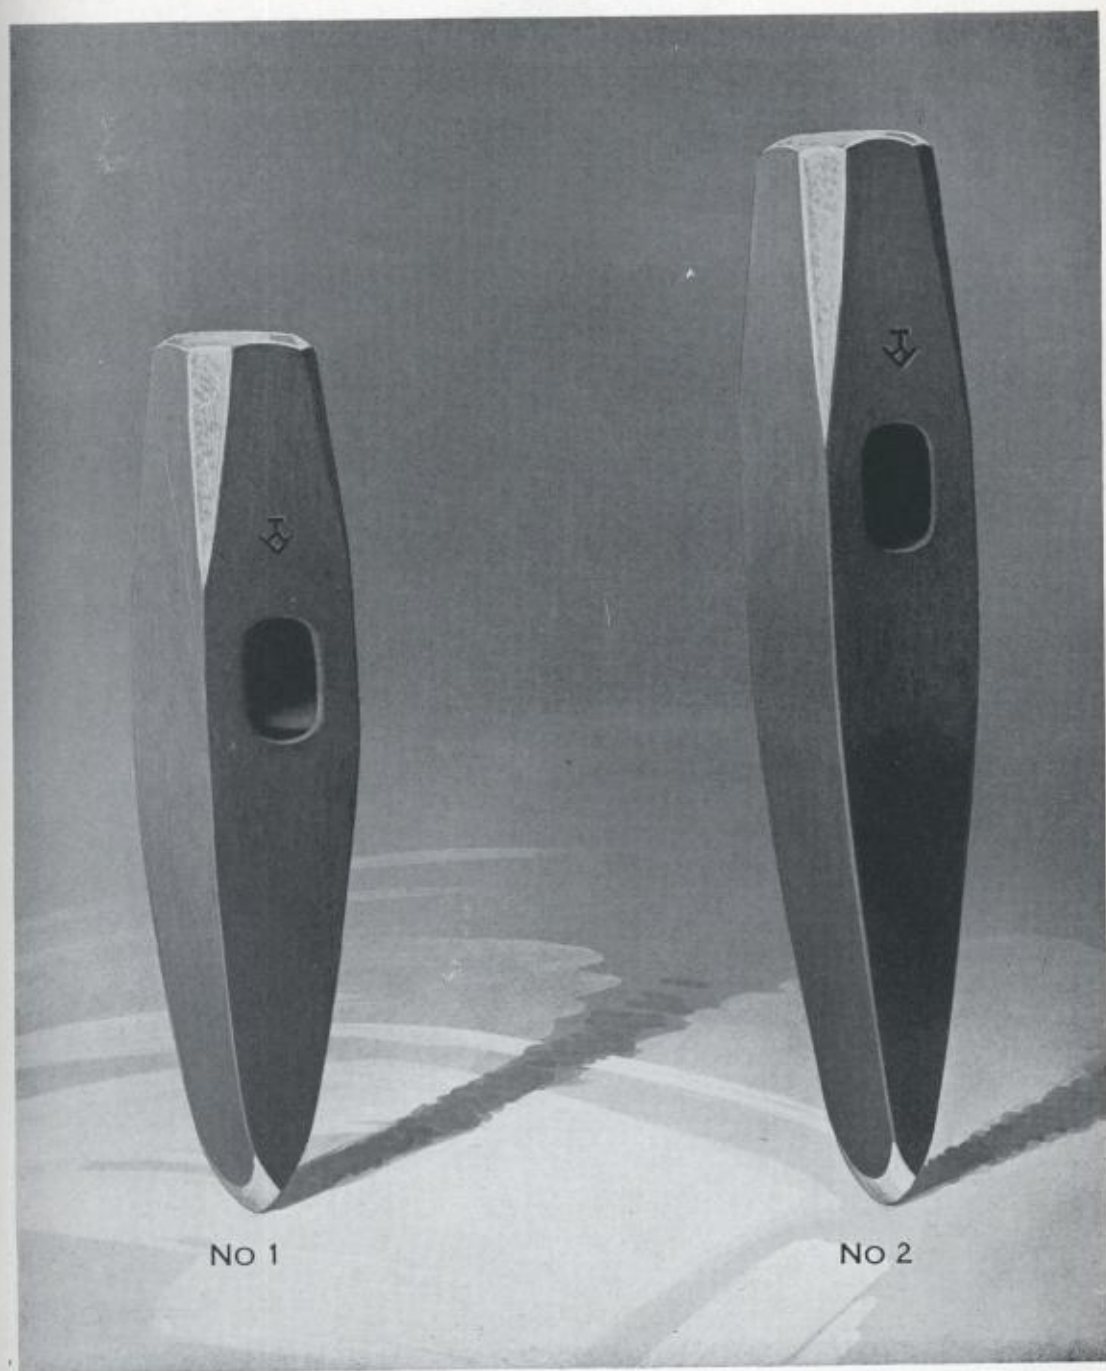

- No. 1. Track Chisel. A.R.E.A. Plan No. 16, Design 1. Standard weight  $5\frac{1}{4}$  pounds. Length  $9\frac{1}{4}$  inches.  
No. 2. Track Chisel. A.R.E.A. Plan No. 16, Design 1. Standard weight  $6\frac{1}{4}$  pounds. Length  $10\frac{1}{2}$  inches.

Also furnished in "VERONALLOY" a special alloy Steel

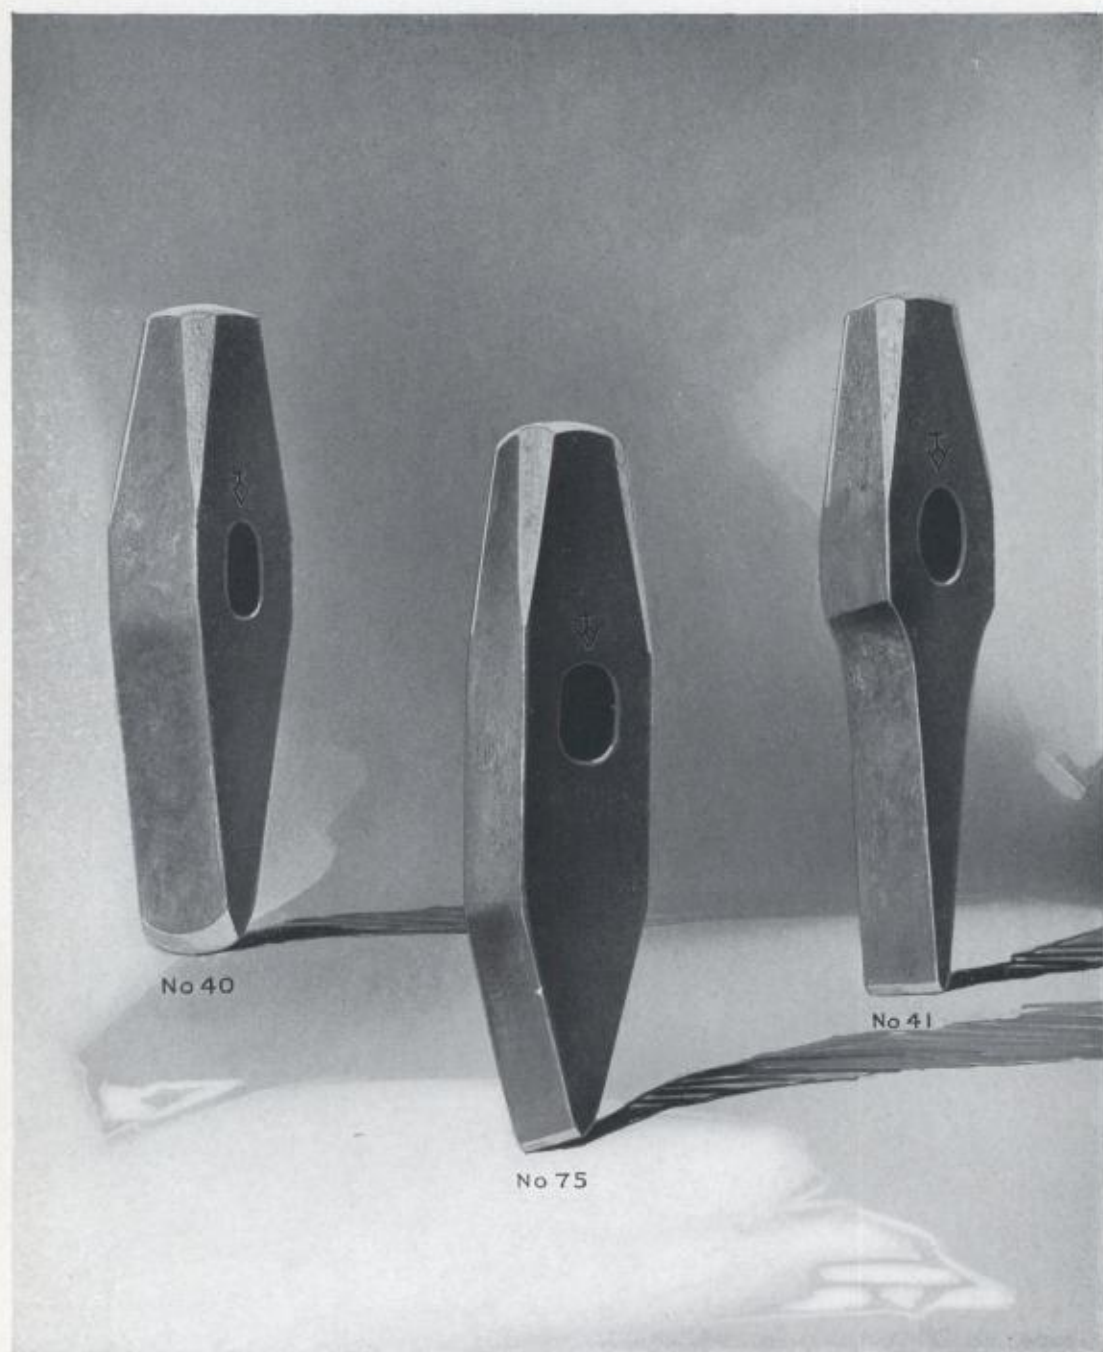

- No. 40. Blacksmith's Cold Chisel. Bit sizes— $1\frac{1}{4}$ -inch to 2-inches. Square or Round Bit.  
No. 41. Blacksmith's Hot Chisel. Bit Sizes— $1\frac{1}{4}$ -inch to  $1\frac{3}{4}$ -inch.  
No. 75. Foundry Chisel. Standard weight—6 pounds. Length  $9\frac{3}{8}$ ".

*Made of special steel, heat treated*



No 801



No 802


#### WELDER'S TOOLS

- No. 801. Welder's Hot Cutting Chisel. Alloy. Standard weight  $4\frac{1}{2}$  pounds. Length  $8\frac{1}{4}$ -inches.  
No. 802. Blacksmith's Square Flatter. Faces 2-inch,  $2\frac{1}{2}$ -inch, 3-inch,  $3\frac{1}{2}$ -inch and 4-inch.





- No. 73. Cold or Flat Chipping Chisel. Made in sizes  $\frac{1}{4}$ -inch to 1-inch. Octagon.  
No. 74. Cape Chisel. Made in sizes  $\frac{1}{4}$ -inch to 1-inch. Octagon.  
No. 74A. Round Nose Chisel or Gouge. Made in sizes  $\frac{1}{4}$ -inch to 1-inch. Octagon.  
No. 74B. Diamond Point Chisel. Made in sizes  $\frac{1}{4}$ -inch to 1-inch. Octagon.  
No. 76. Broom Chisel for cleaning frogs and switches.  
No. 73-74-74A-74B can be furnished for use in pneumatic hammer. See Page 70.

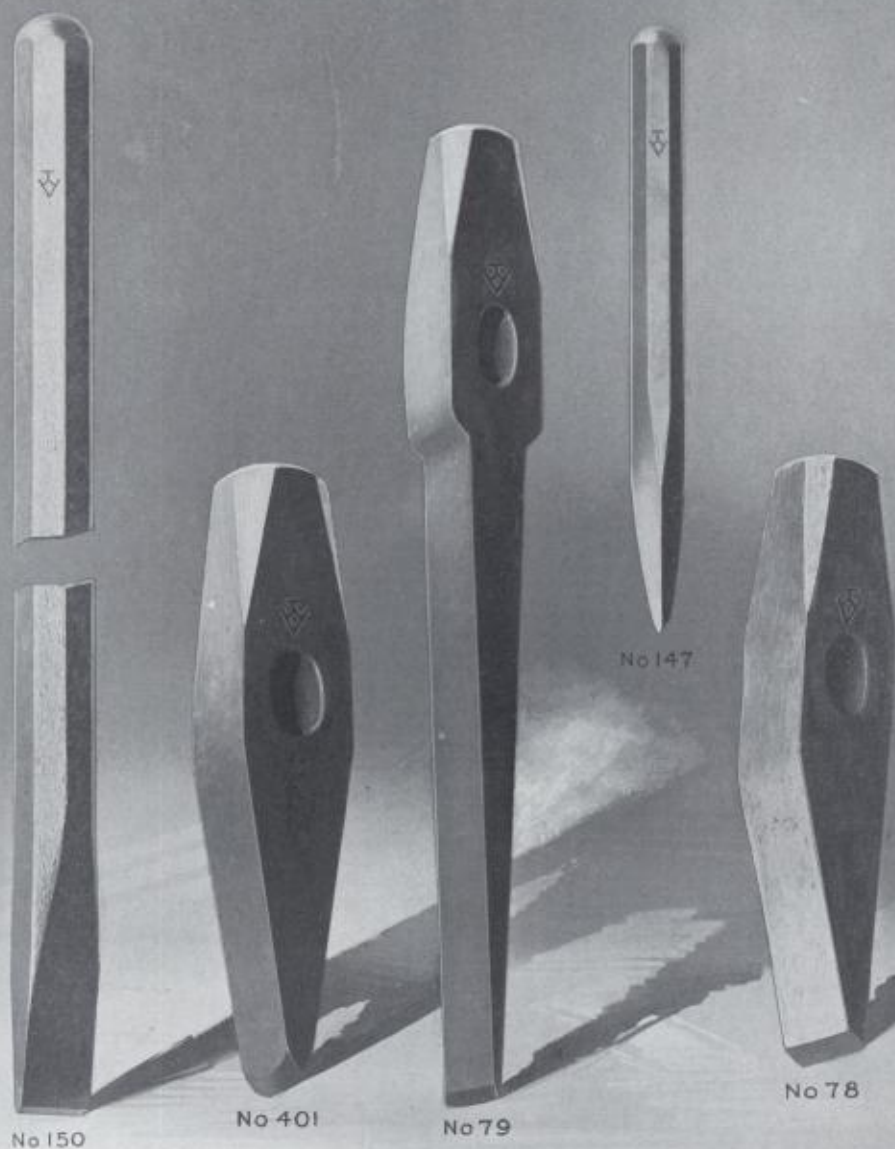

- No. 150. Double Hand Chisel. Standard size  $1\frac{1}{8}$  or  $1\frac{1}{4}$ -inches. Octagon. Any length desired.  
No. 401. Car Chisel, for cutting rivets in repairing steel cars. Standard weight  $5\frac{1}{4}$  pounds.  
No. 79. Drift Bolt Chisel for cutting bolts. Standard weight 5 pounds.  
No. 147. Diamond Point Chisel, for stone work. Standard size  $\frac{3}{4}$  x 9-inches.  
No. 78. Side Chisel, for cutting rivets. Weight 3, 4 or 5 pounds.


*All made of special steel, heat treated*



- No. 84. Claw Bar (Goose Neck). Weight 30 pounds.  
No. 4. Claw Bar. Weight 20, 25 or 30 pounds.  
No. 85. Double End Claw Bar; one end for boat spikes, other end for railroad spikes.


*All claw bars carefully tempered*



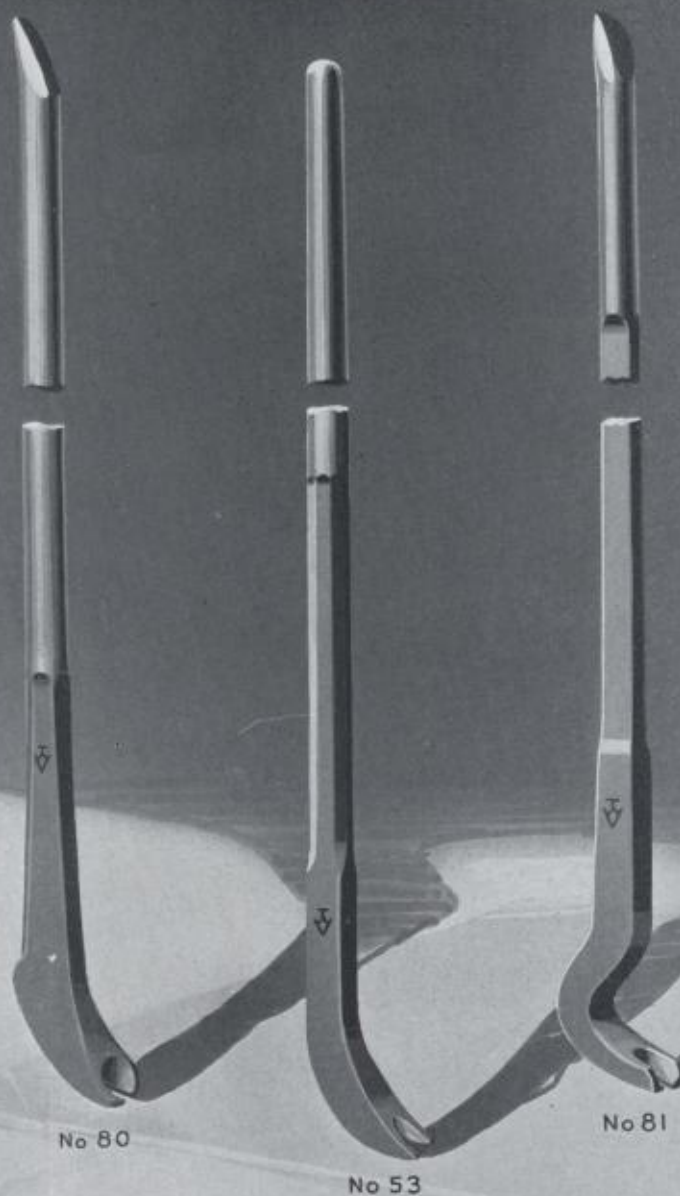

- No. 80. Claw Bar. A.R.E.A. Plan 11-A. Weight 30 pounds.  
No. 80B. Claw Bar. A.R.E.A. Plan 11. Weight 30 pounds.  
No. 53. Claw Bar. Weight 29 pounds.  
No. 81. Nelson Claw Bar (Goose Neck). Weight 29 pounds.

*All claw bars carefully tempered*

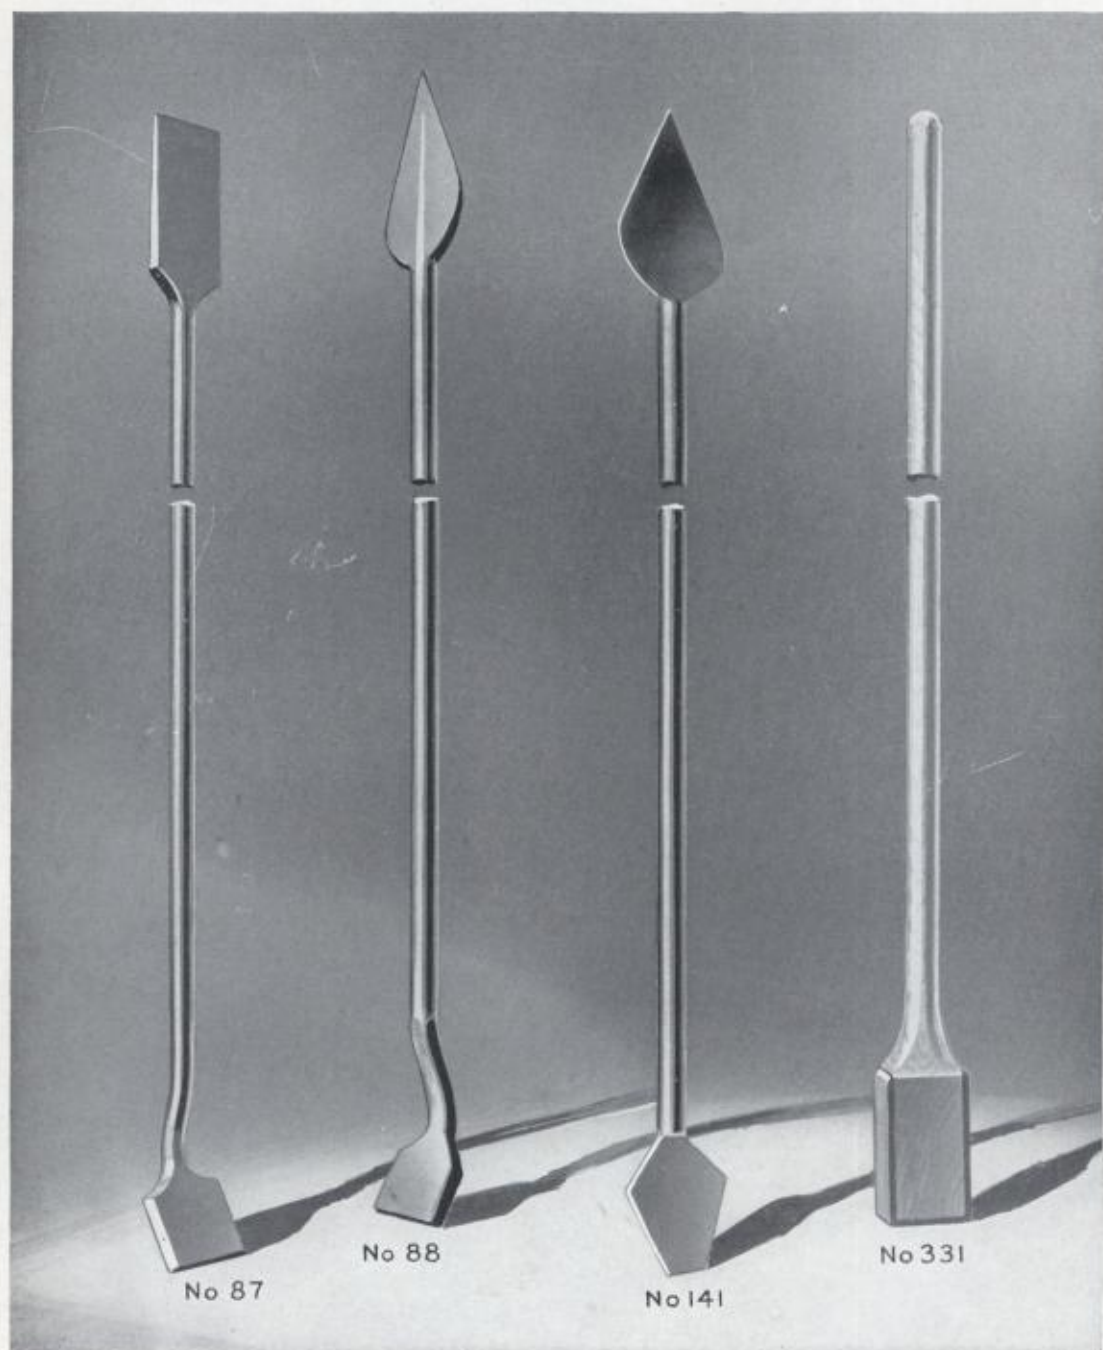


- No. 87. Spade End Tamping Bar. Solid handle, no welding. Weight 15 pounds.  
No. 88. Spear End Tamping Bar. A. R. E. A. Plan No. 15. Weight 15 pounds.  
No. 141. Diamond Stone Tamping Bar. Designed for stone ballast. Weight 17 pounds.  
No. 331. Wood Handle Tamping Bar. With steel shoe for street railway use.




- No. 33. Tamping Bar. Weight 13 pounds.  
No. 33½. R. M. A. Tamping Bar. A. R. E. A. Plan No. 14. (Recommended by Committee R. M. A.)  
Weight 13 pounds.  
No. 86. End Tamping Bar. Made of spring steel.




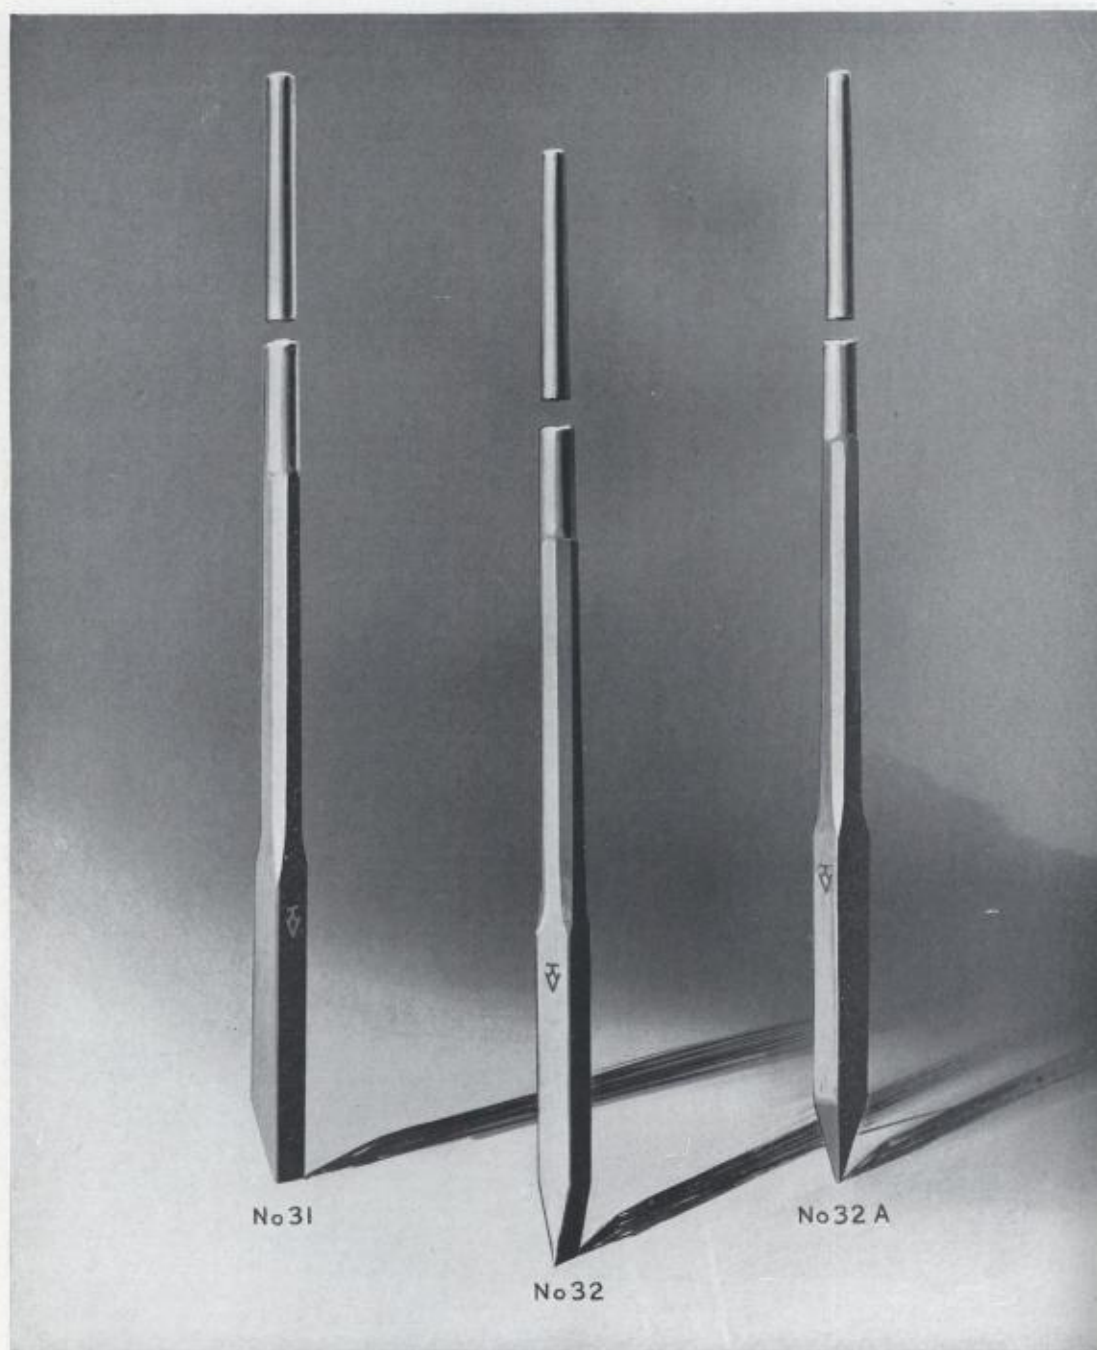

- No. 31. Lining Bar (Pinch Point). A. R. E. A. Plan No. 5. Made in weights from 3 to 30 pounds.  
No. 32. Lining Bar (Wedge Point) .A. R. E. A. Plan No. 5. Made in weights from 10 to 30 pounds.  
No. 32A. Lining Bar (Diamond Point). A. R. E. A. Plan No. 5. Made in weights 10 to 30 pounds.

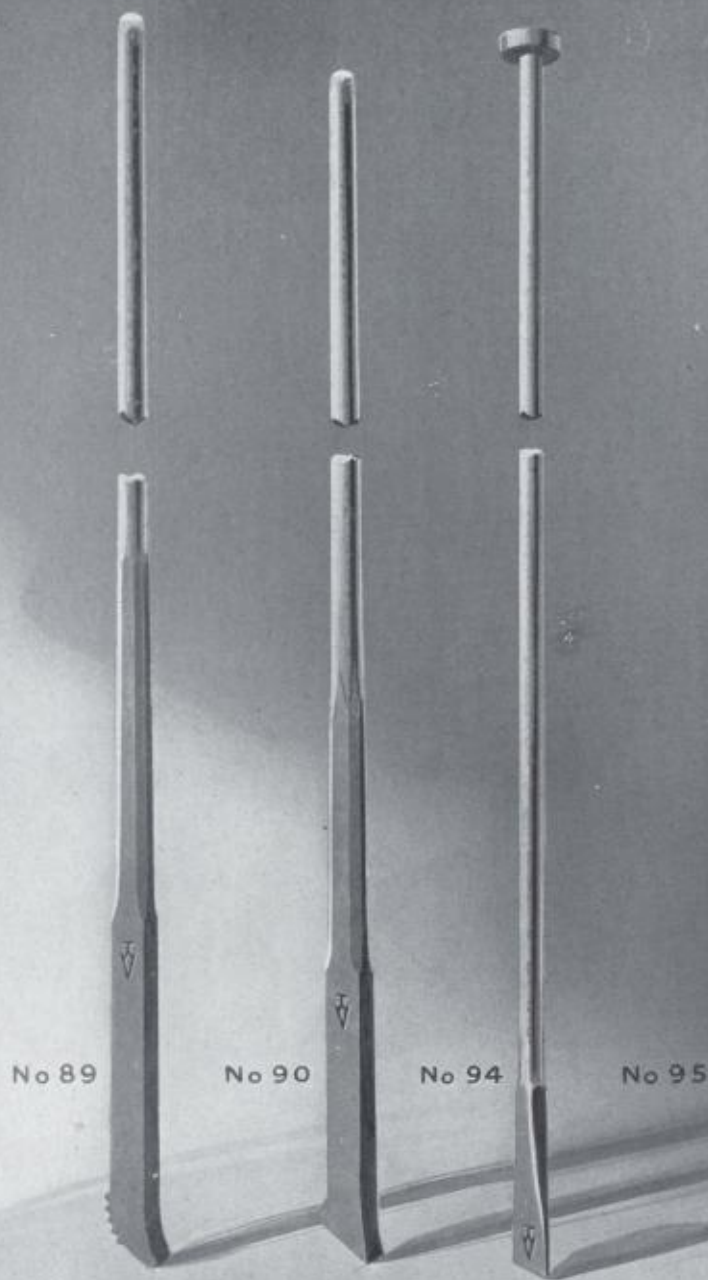

- No. 89. Locomotive Pinch Bar or Car Pusher. Length 7-feet. Teeth machine cut. Carefully tempered. Weight 33 pounds.
- No. 90. Heel Pinch Bar. Length 5-feet, 6-inches. Weight 29 pounds.
- No. 94. Post Hole Diggers. Weight 18 pounds. Length 6-feet.
- No. 95. Digging Bar. Tool Steel— $1\frac{1}{8}$ -inch Octagon, 7 or 8-feet long.

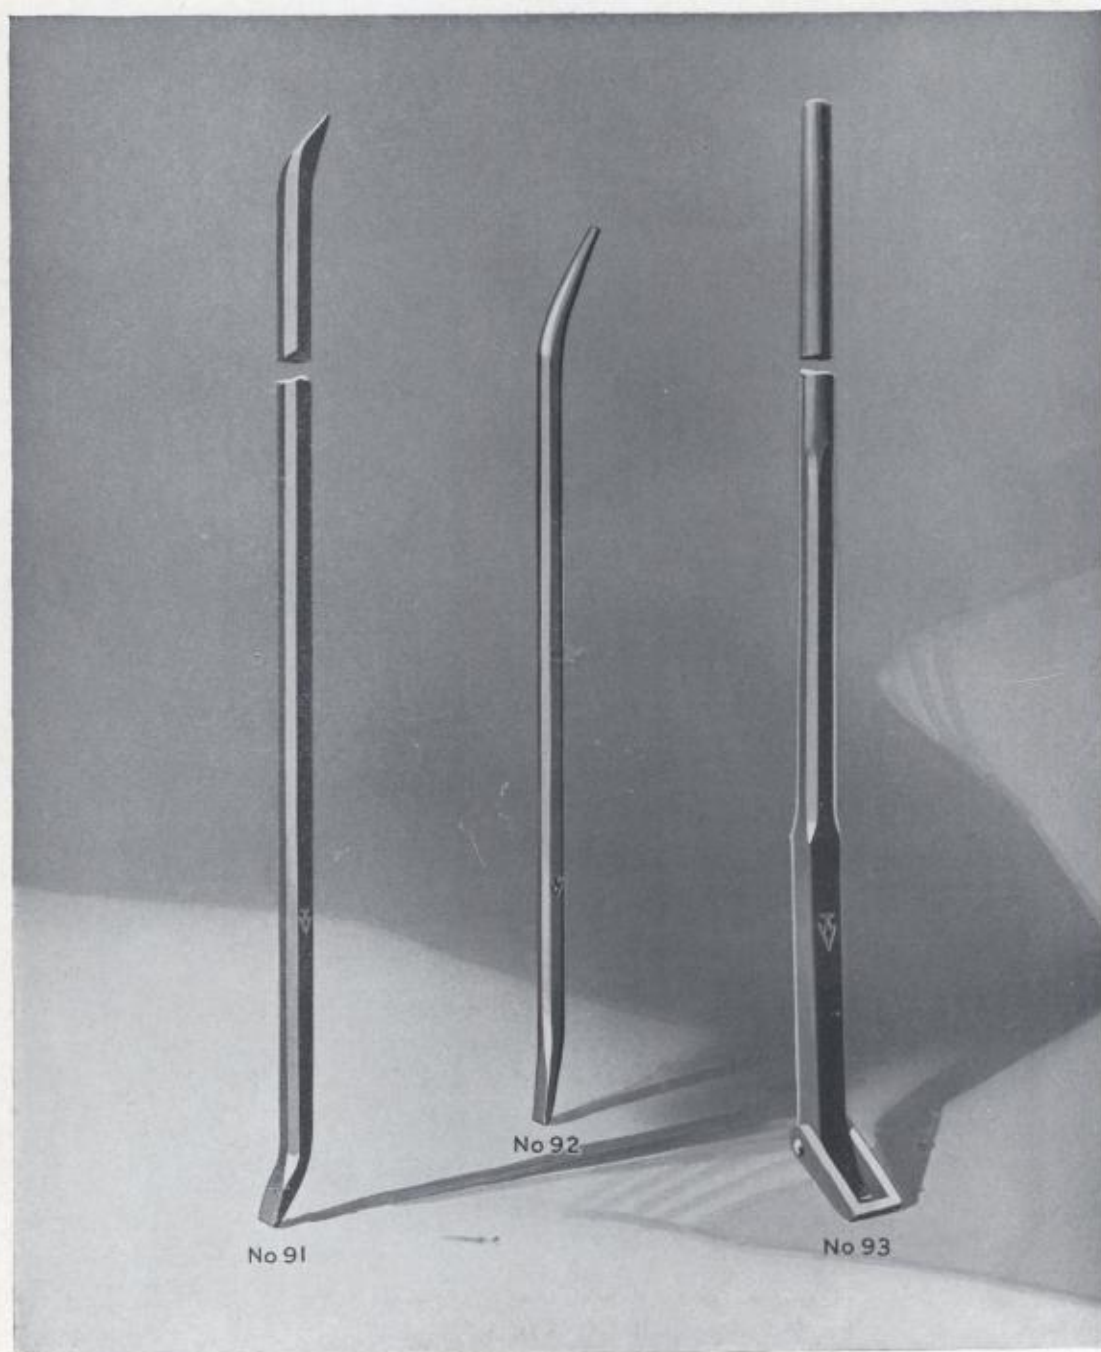

- No. 91. Timber Bar. (Diamond and Chisel Point) Standard size  $1\frac{1}{8}$ -inches by 5-feet. Weight 17 pounds.  
No. 92. Buggy Bar. Standard size  $\frac{7}{8}$ -inch by 36-inches. Weight 6 pounds.  
No. 93. Shackle Bar. Length  $5\frac{1}{2}$ -feet. Weight 29 pounds.





NO 700



NO 701



NO 703



NO 702




NO 705

- No. 700. Adze. Full Head Railroad. A. R. E. A. Plan No. 12. 4 to 5-inch bit.  
No. 701. Adze. Carpenter's half head, 4 to 5-inch bit.  
No. 703. Adze. Spanish pattern, round eye, 5½-inch bit.  
No. 702. Adze. Special for railroad work. Pick eye, round pole end, 4 to 5-inch bit.  
No. 705. Adze. Full head, pick eye, 4 to 5-inch bit.

Nos. 700-701-702 also furnished in "VERONALLOY" a special Alloy Steel.

*All adzes made of solid steel, tempered*

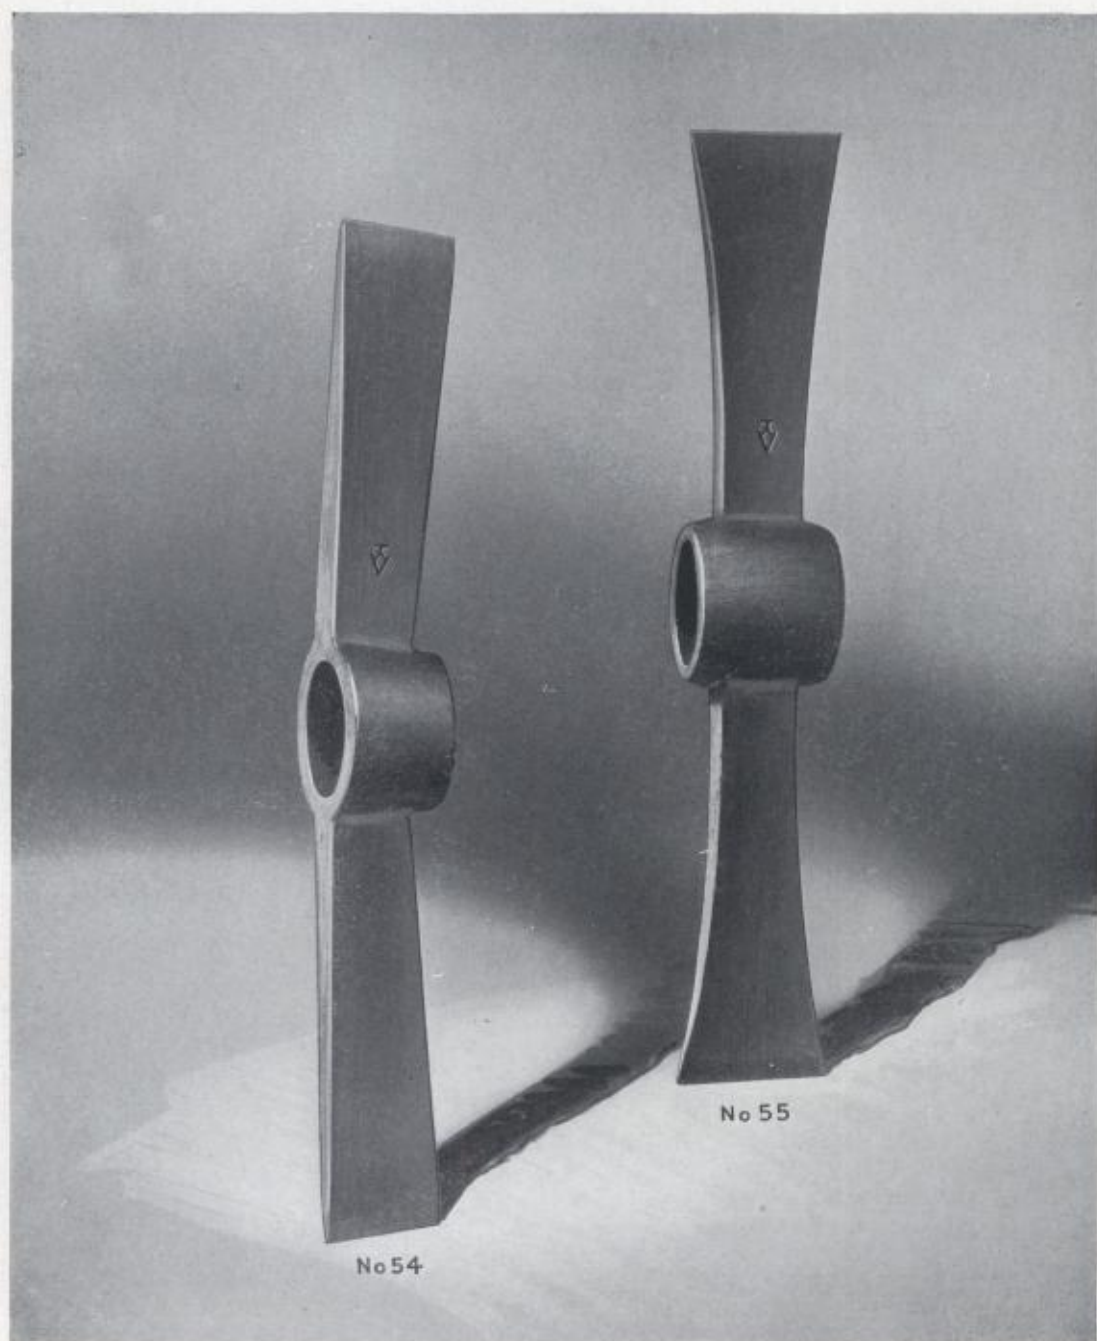

No. 54. Asphalt Cutter (Single Eye). Weight 9 pounds.  
No. 55. Asphalt Cutter (Double Eye). Weight 10 pounds.



NO 106




NO 107

- No. 106. Cutter Mattock. Long or short cutter. Weights 3, 4, 5 and 6 pounds.  
No. 107. Pick Mattock. Weights 5 and 6 pounds.

*All matlocks specially tempered*



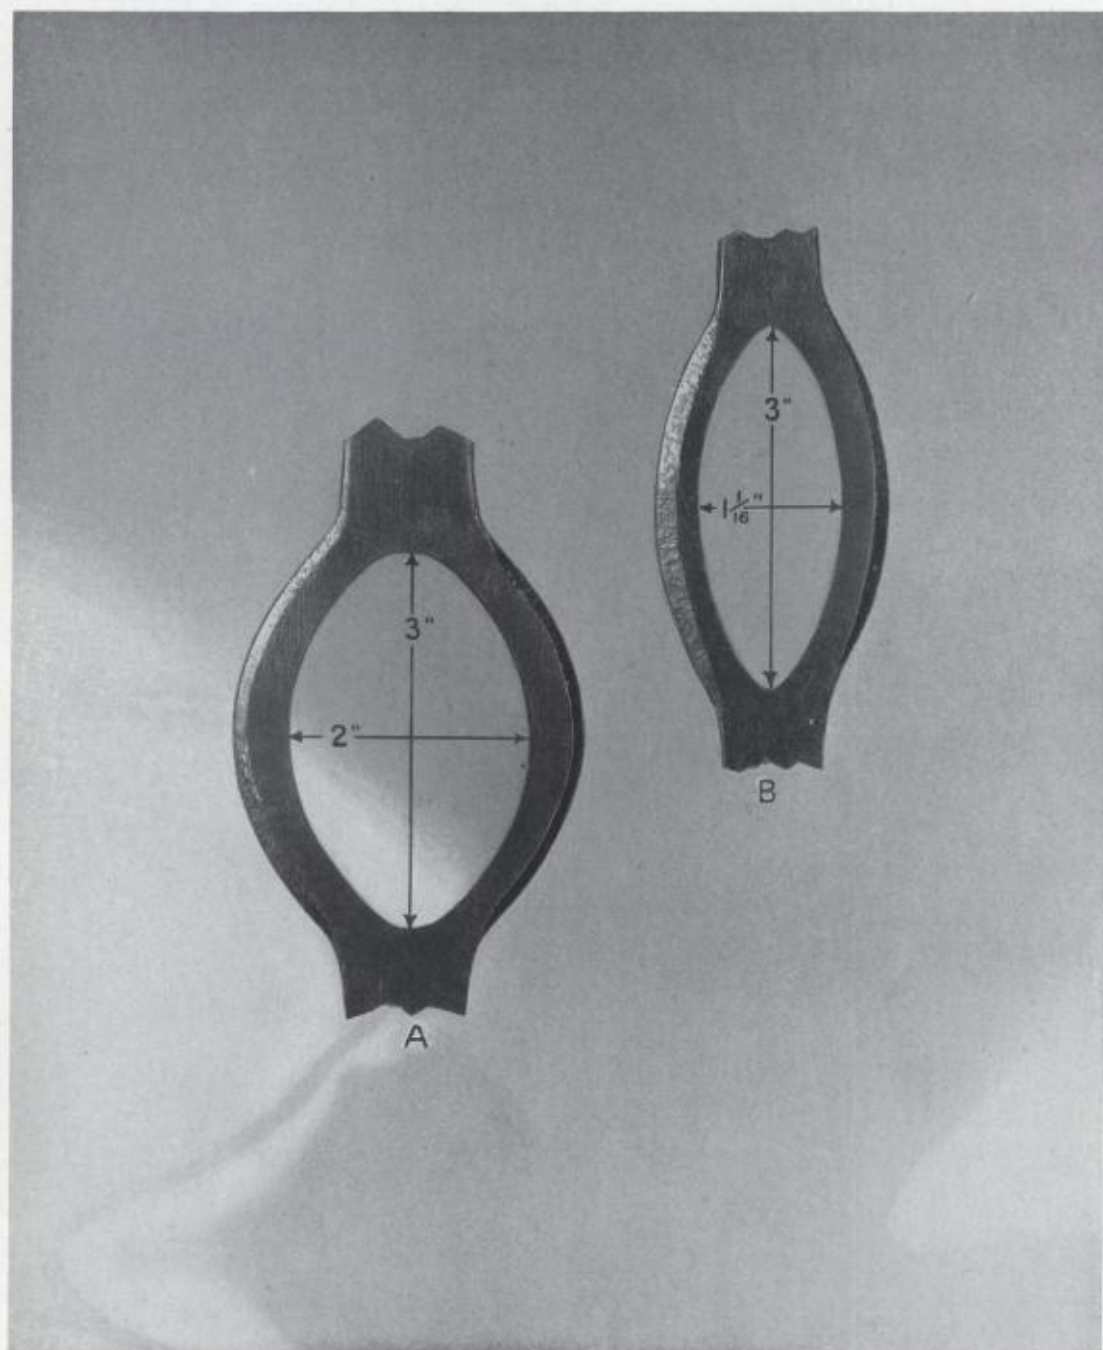

#### SIMPLIFIED PRACTICE

##### SIZES OF PICKEYES

- A. Standard Eye used in Nos. 2, 3, 7, 17, 49, 54, 99, 106, 107, 142.
- B. This style eye used in Nos. 22, 24, 100, 101.



No 161



No 162



No 158



No 163



No 164

- No. 161. Vineyard Hose. Weight  $2\frac{1}{2}$  pound, 8-inch long. Weight 3 pound, 10-inch long.  
No. 162. Grub Hose. Weight 3,  $3\frac{1}{2}$ , 4 and  $4\frac{1}{2}$  pounds.  
No. 158. Cooper Froe. 12 and 14-inch lengths.  
No. 163. Hazel Hoe. Weight 3 pounds, 6-inch blade.  
No. 164. Accomac Hoe. Weight  $4\frac{1}{2}$  pounds, 6-inch blade and 5 pound,  $6\frac{1}{2}$ -inch blade.



No 17-Y

No 7-D


No 7-W

No. 17-Y Contractor Pick Yankee Pattern	
Weight	Length
7 Lb.	29"
8 Lb.	30"
9 Lb.	31"

No. 7-D Railroad Pick Double Pointed	
Weight	Length
5 Lb.	21"
6 Lb.	23"
7 Lb.	25"
8 Lb.	26"
9 Lb.	27"
10 Lb.	28"

No. 7-W Railroad Pick Wide Chisel End	
Weight	Length
5 Lb.	21"
6 Lb.	23"
7 Lb.	25"
8 Lb.	26"



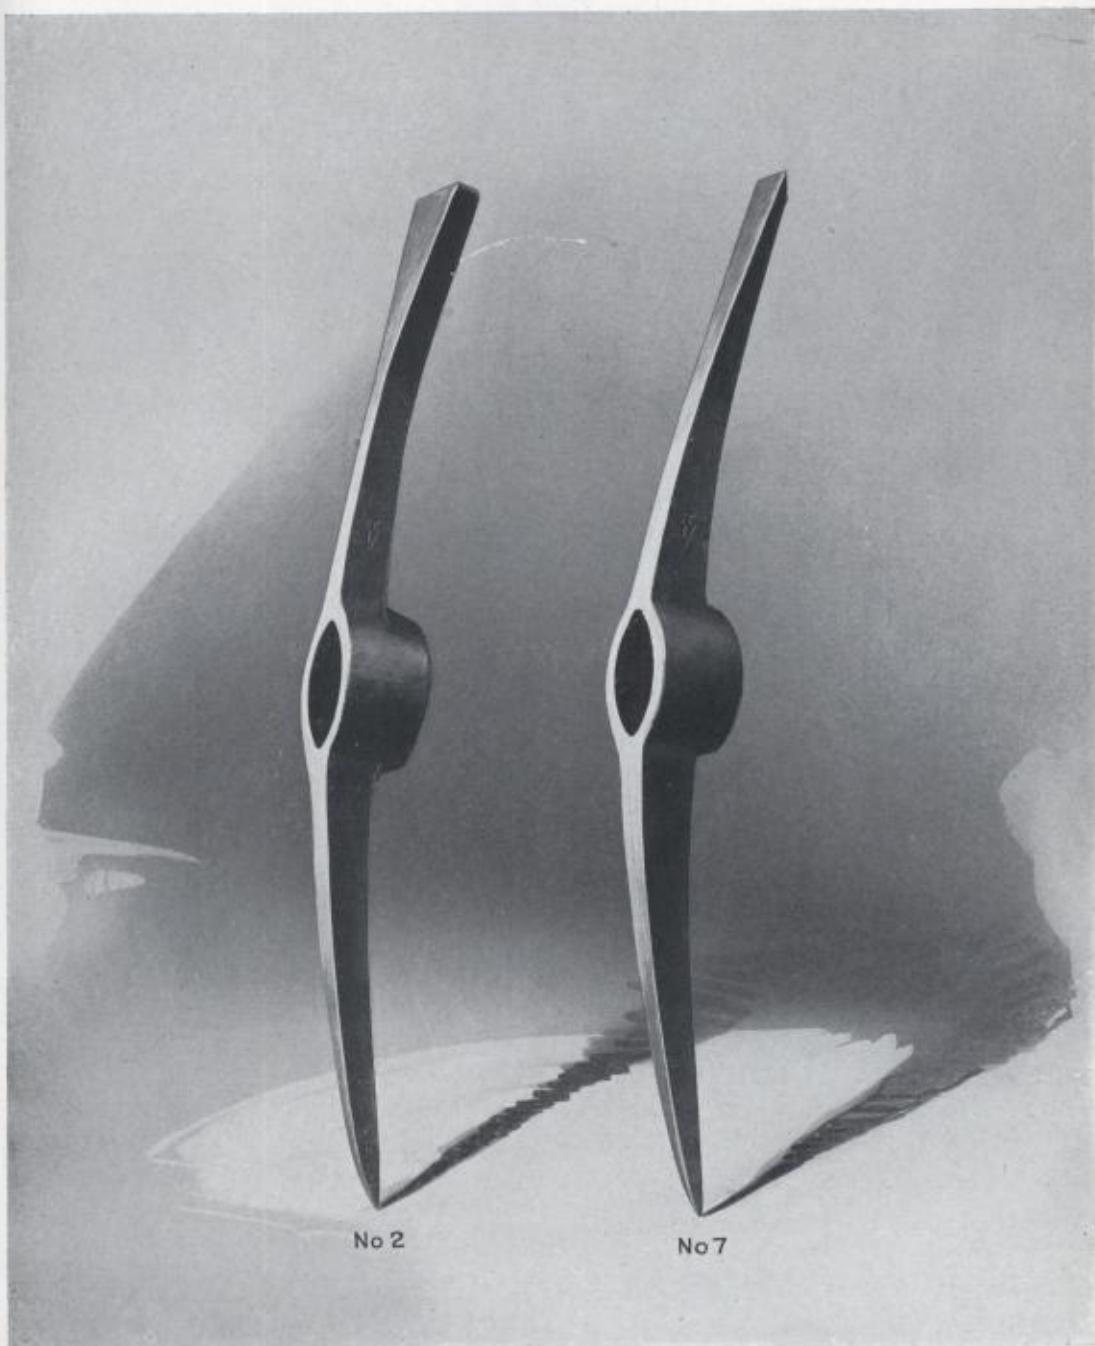

No. 2 Tamping Pick  
A. R. E. A. Plan No. 2

Weight
7-8 Lb.
9 Lb.

No. 7 Clay Pick  
A. R. E. A. Plan No. 1

Weight	Length
5 Lb.	21"
6 Lb.	23"
7 Lb.	25"

No. 7 Clay Pick—(Continued)  
A. R. E. A. Plan No. 1

Weight	Length
8 Lb.	26"
9 Lb.	27"
10 Lb.	28"

*All picks made of the best grade open hearth steel specially tempered  
Also furnished in "VERONALLOY", a Special Alloy Steel*



No. 3 Tamping Pick  
(T Tamper)

Weight  
7-8 Lb.  
9 Lb.


No. 17 Contractor Pick  
(Diamond Point or Point and Chisel End)

Weight	Length
7 Lb.	28"
8 Lb.	29"
9 Lb.	30"

No. 99 Quarry Pick

Weight	Length
7 Lb.	23"
8 Lb.	25"
9 Lb.	26"

*All picks made of the best grade open hearth steel specially tempered  
Also furnished in "VERONALLOY", a Special Alloy Steel*

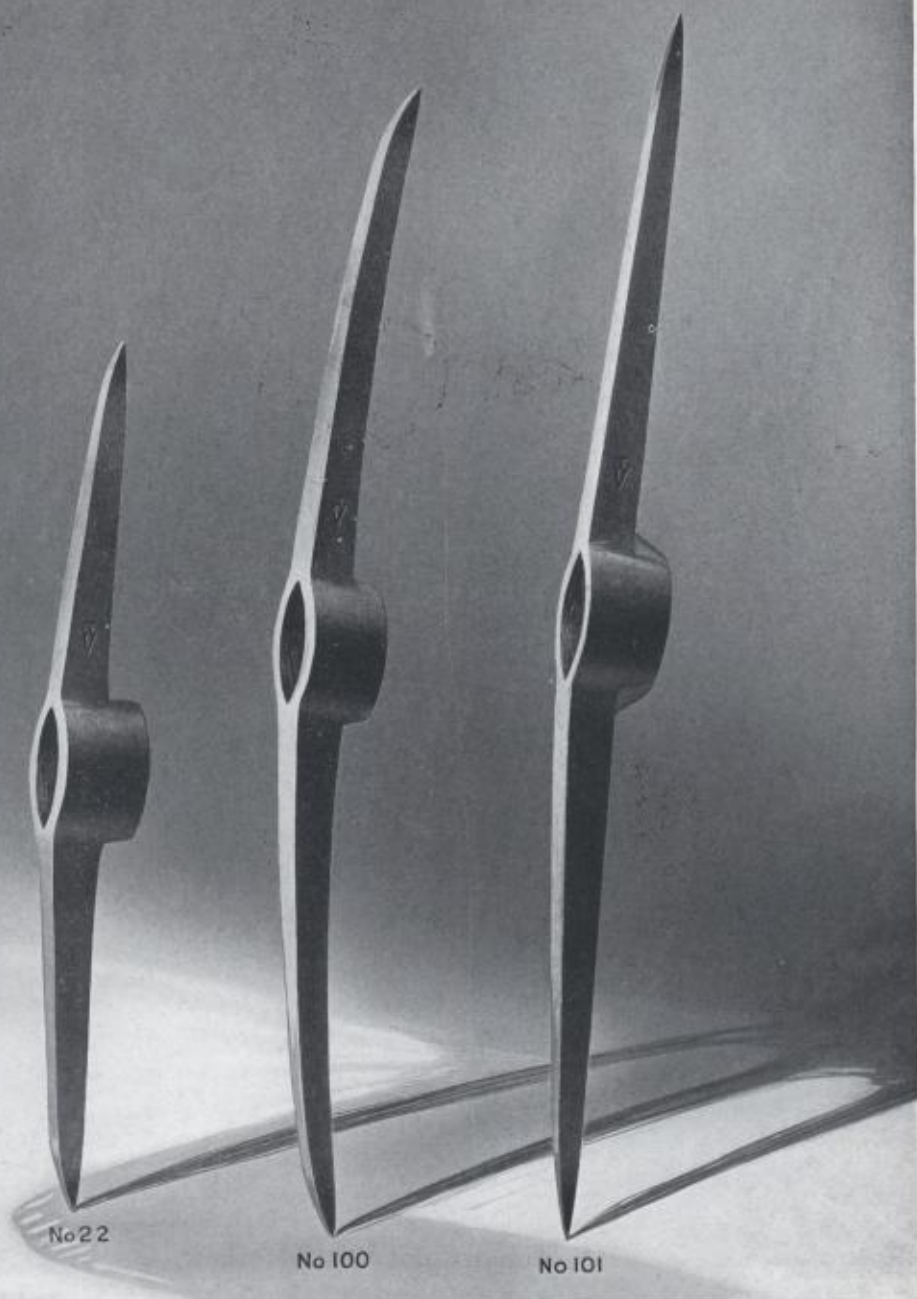

No. 22 Drifting Pick  
(San Juan Pattern)

Weight	Length
4 Lb.	21"
4½ Lb.	23"
5 Lb.	25"
5½ Lb.	25½"
6 Lb.	26"

No. 100 Drifting Pick  
(Langley Pattern)


Weight	Length
5 Lb.	28"
6 Lb.	30"
7 Lb.	32"

No. 101 Drifting Pick  
(Yukon Pattern)

Weight	Length
5 Lb.	28"
6 Lb.	30"
7 Lb.	32"

*All picks made of best grade open hearth steel specially tempered*



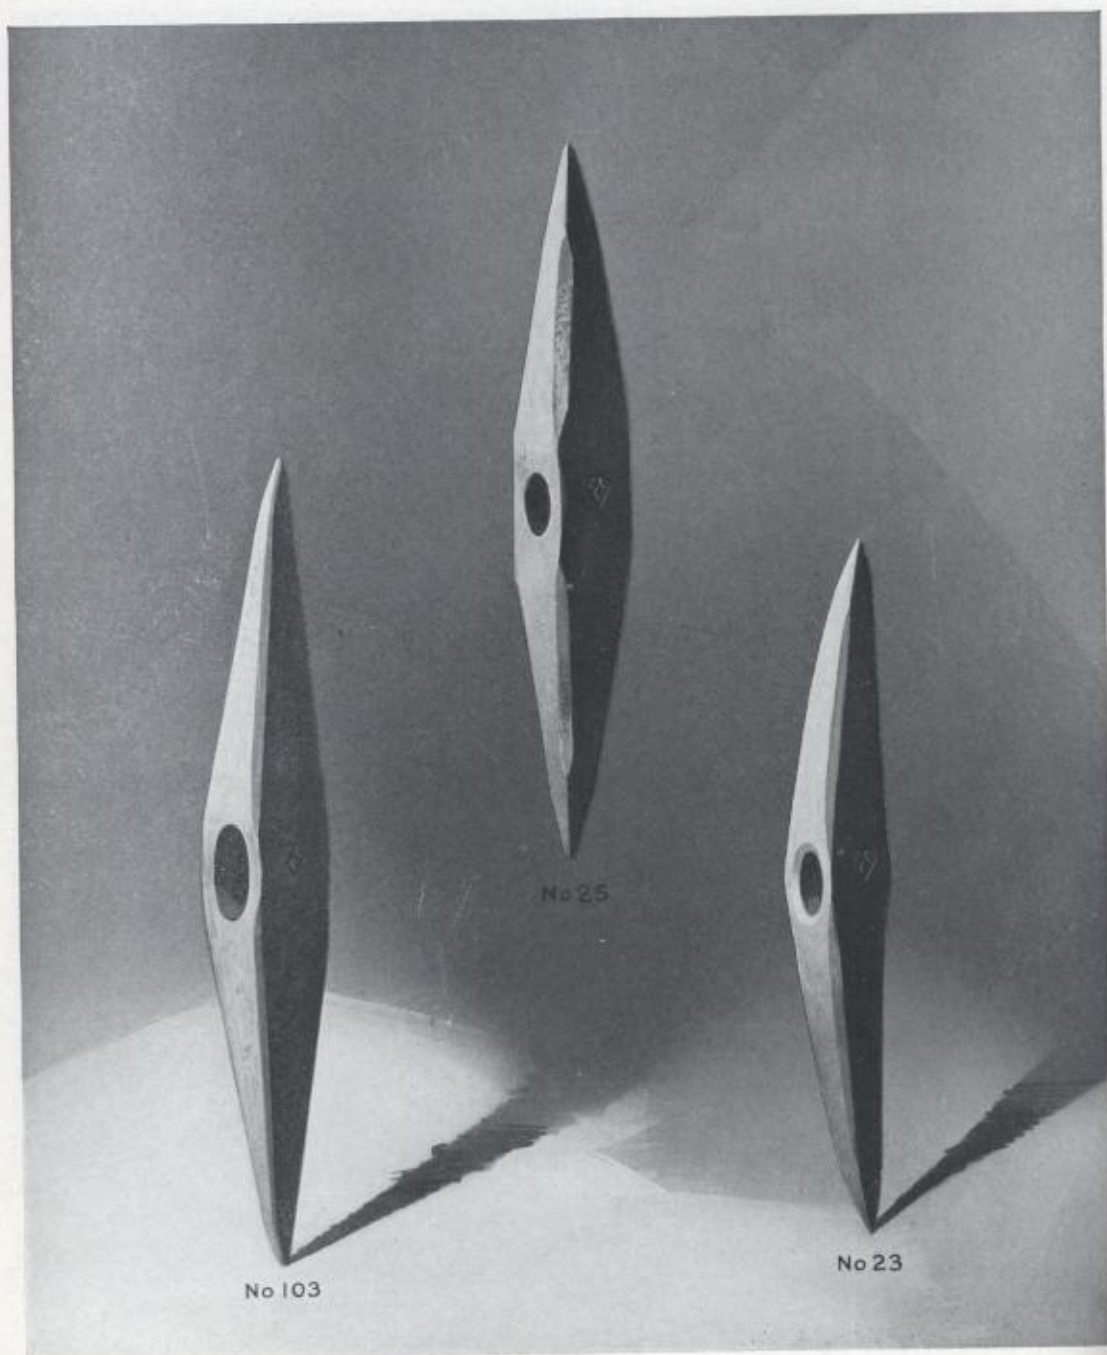

- No. 25. Quarry Pick. Weights 7 and 8 pounds.  
No. 103. Concrete Pick. Weights 8, 9 and 10 pounds.  
No. 23. Stone Pick. Weights 6, 7 and 8 pounds.

*All picks made of best grade open hearth steel specially tempered*




NO 24



NO 62

- No. 24. Poll Pick. Weights 4 pound, 15-inch; 5 pound, 16-inch; and 6 pound, 17-inch.  
No. 62. Prospectors' Pick. Weights  $1\frac{1}{2}$  to 3 pounds.

*All picks made of best grade open hearth steel specially tempered*

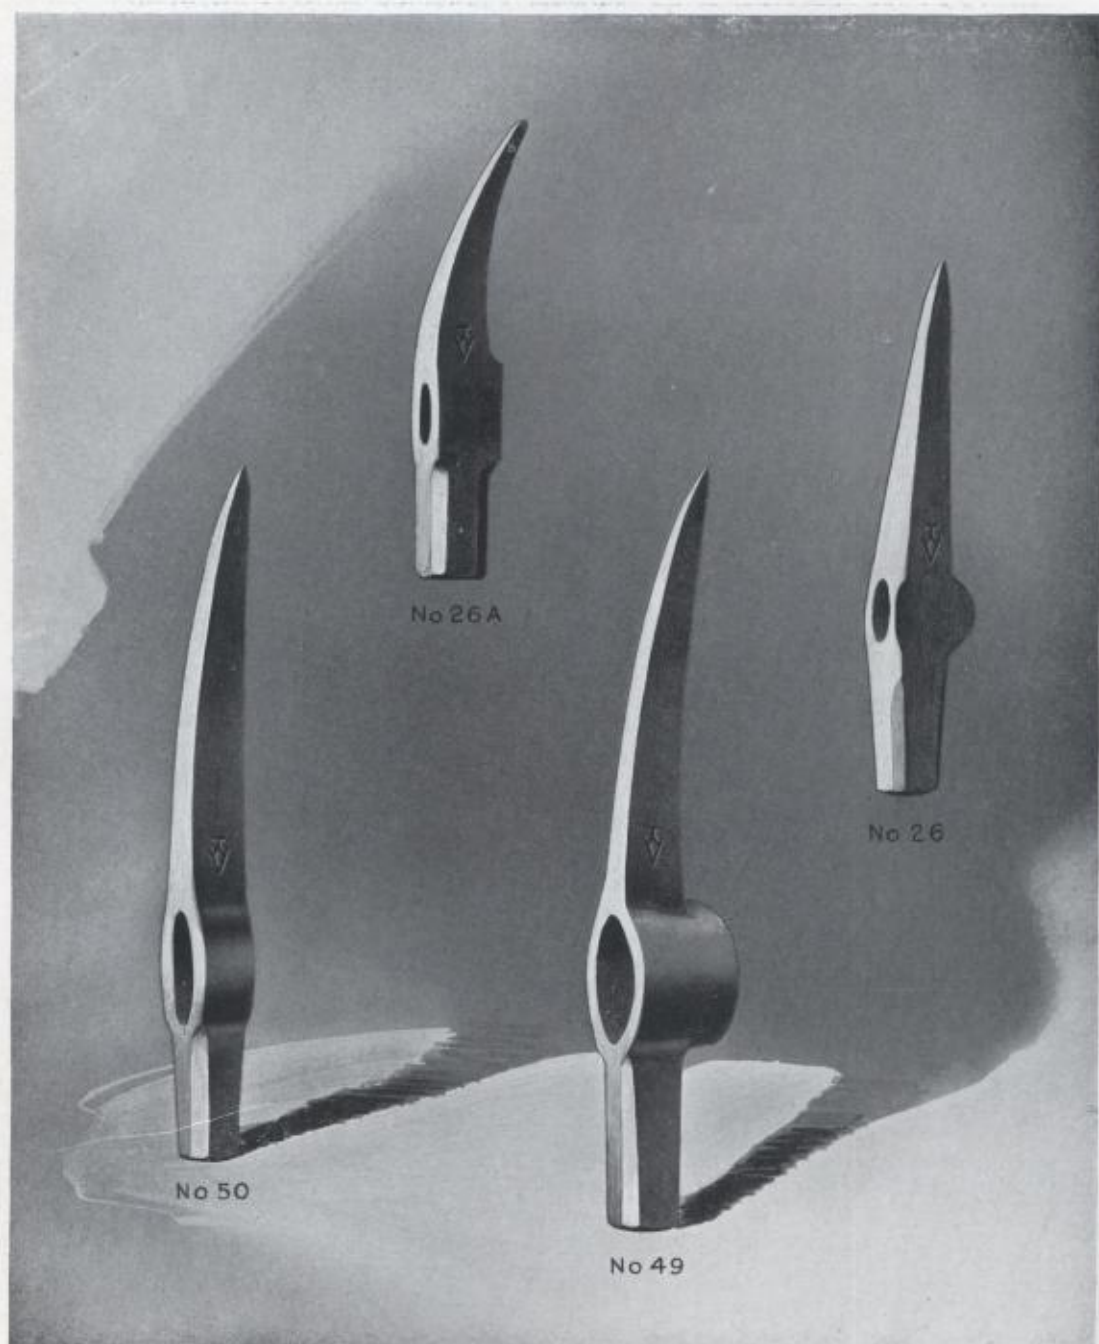

- No. 26A. Locomotive Pick. Weight 4 pounds.  
No. 26. Locomotive Pick. Weights 4 and 5 pounds.  
No. 50. Iron Mining Pick. Weights 5, 6 and 7 pounds.  
No. 49. Iron Mining Pick. Weights 5 to 8 pounds.

*All picks made of best grade open hearth steel specially tempered*





No 97



No 98



No 142



No 143

- No. 97. Eyeless Clay Pick. Casting malleable iron, cast in one piece.  
No. 98. Eyeless Tamping Pick. Casting malleable iron, cast in one piece. Either V or T ends as desired.  
No. 142. Diamond Stone Tamping Pick. Designed for tamping stone ballast.  
No. 143. Diamond Stone Tamping Pick, eyeless. Designed for tamping stone ballast.

*All picks made of best grade open hearth steel specially tempered*



No 159



No 16-M



No 160



No 10-M



No 102

No. 159  
Bush Hammer

Weight  
4 Lb.  
6 Lb.  
8 Lb.

No. 16-M Striking Hammer  
Missouri Pattern


Weight	Length
8 Lb.	6½"
10 Lb.	6¾"
12 Lb.	7¼"
14 Lb.	8"

No. 10-M Mason Hammer

Weight	Length
3 Lb.	5½"
4 Lb.	6"
5 Lb.	6½"
6 Lb.	7"

No. 160 Boiler Pick  
or Scaling Hammer No. 102 Mill Pick

Weight	Weight
1 Lb.	1½ Lb.
2 Lb.	2 Lb.
	2½ Lb.
	3 Lb.

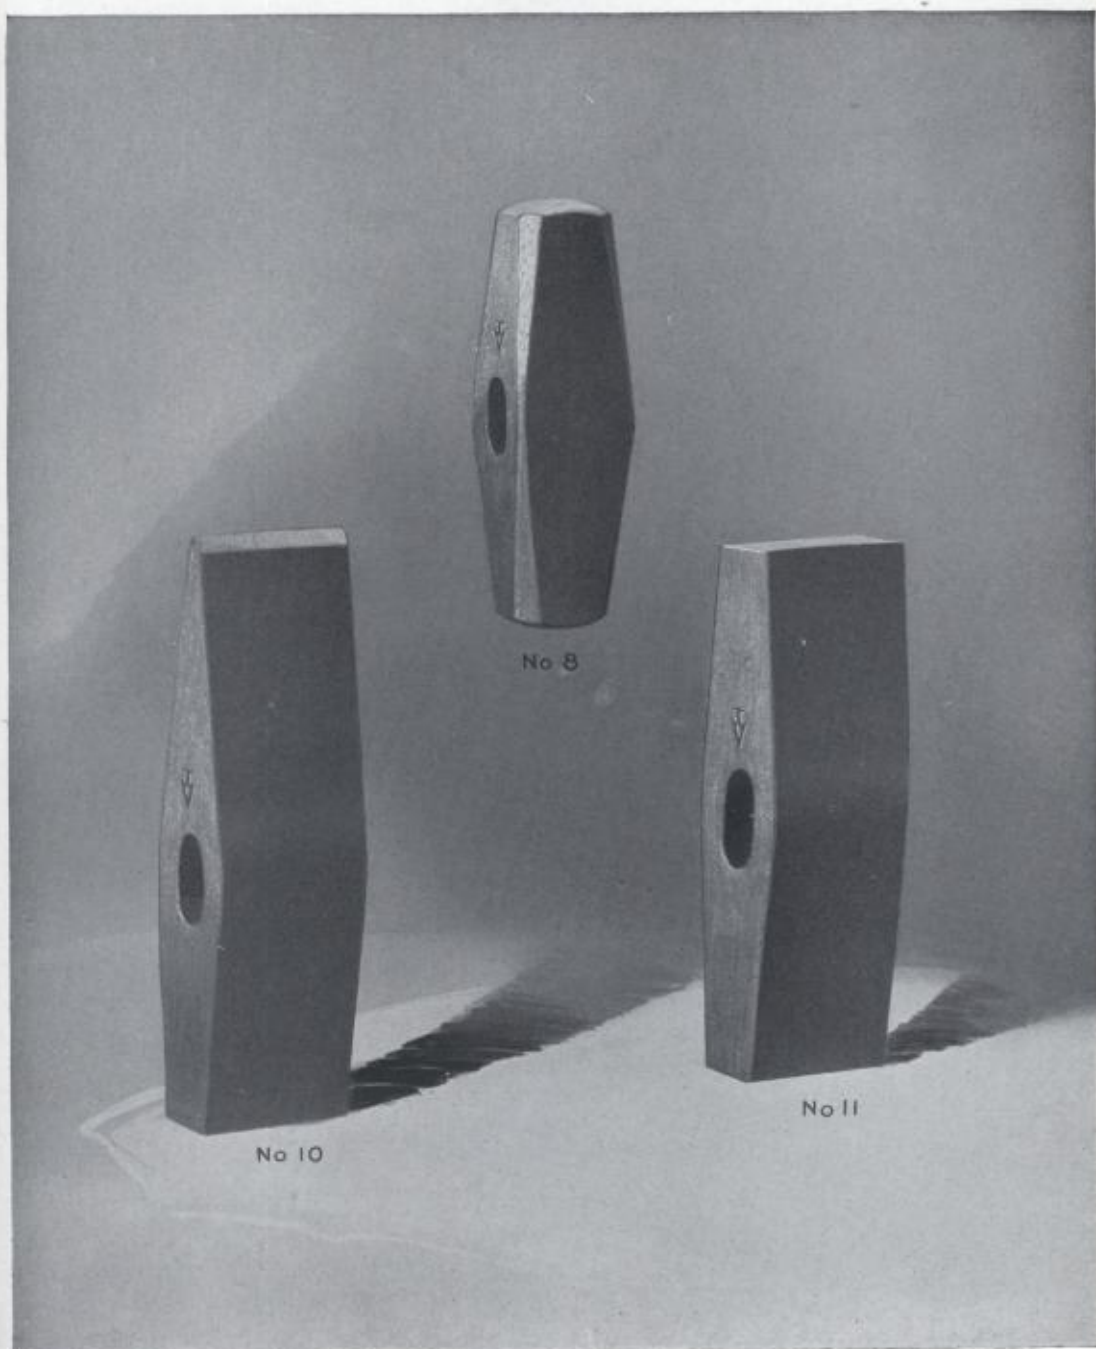


No. 8 Napping Hammer	
Weight	Length
2 Lb.	5"
3 Lb.	5 $\frac{3}{4}$ "
4 Lb.	6 $\frac{1}{4}$ "
5 Lb.	6 $\frac{1}{2}$ "
6 Lb.	6 $\frac{3}{4}$ "
8 Lb.	7 $\frac{1}{4}$ "

No. 10 Single Face Spalling Hammer			
Weight	Length	Weight	Length
3 Lb.	5 $\frac{3}{4}$ "	12 Lb.	8 $\frac{3}{4}$ "
4 Lb.	6"	14 Lb.	9 $\frac{1}{4}$ "
5 Lb.	6 $\frac{1}{4}$ "	16 Lb.	9 $\frac{1}{2}$ "
6 Lb.	6 $\frac{1}{2}$ "	18 Lb.	9 $\frac{3}{4}$ "
8 Lb.	7 $\frac{1}{4}$ "	20 Lb.	10 $\frac{1}{2}$ "
10 Lb.	8 $\frac{3}{4}$ "		

No. 11 Double Face Spalling Hammer	
Weight	Length
8 Lb.	6 $\frac{1}{2}$ "
10 Lb.	6 $\frac{3}{4}$ "
12 Lb.	7"
14 Lb.	7 $\frac{1}{2}$ "
16 Lb.	8"

*All hammers specially heat treated and tempered*



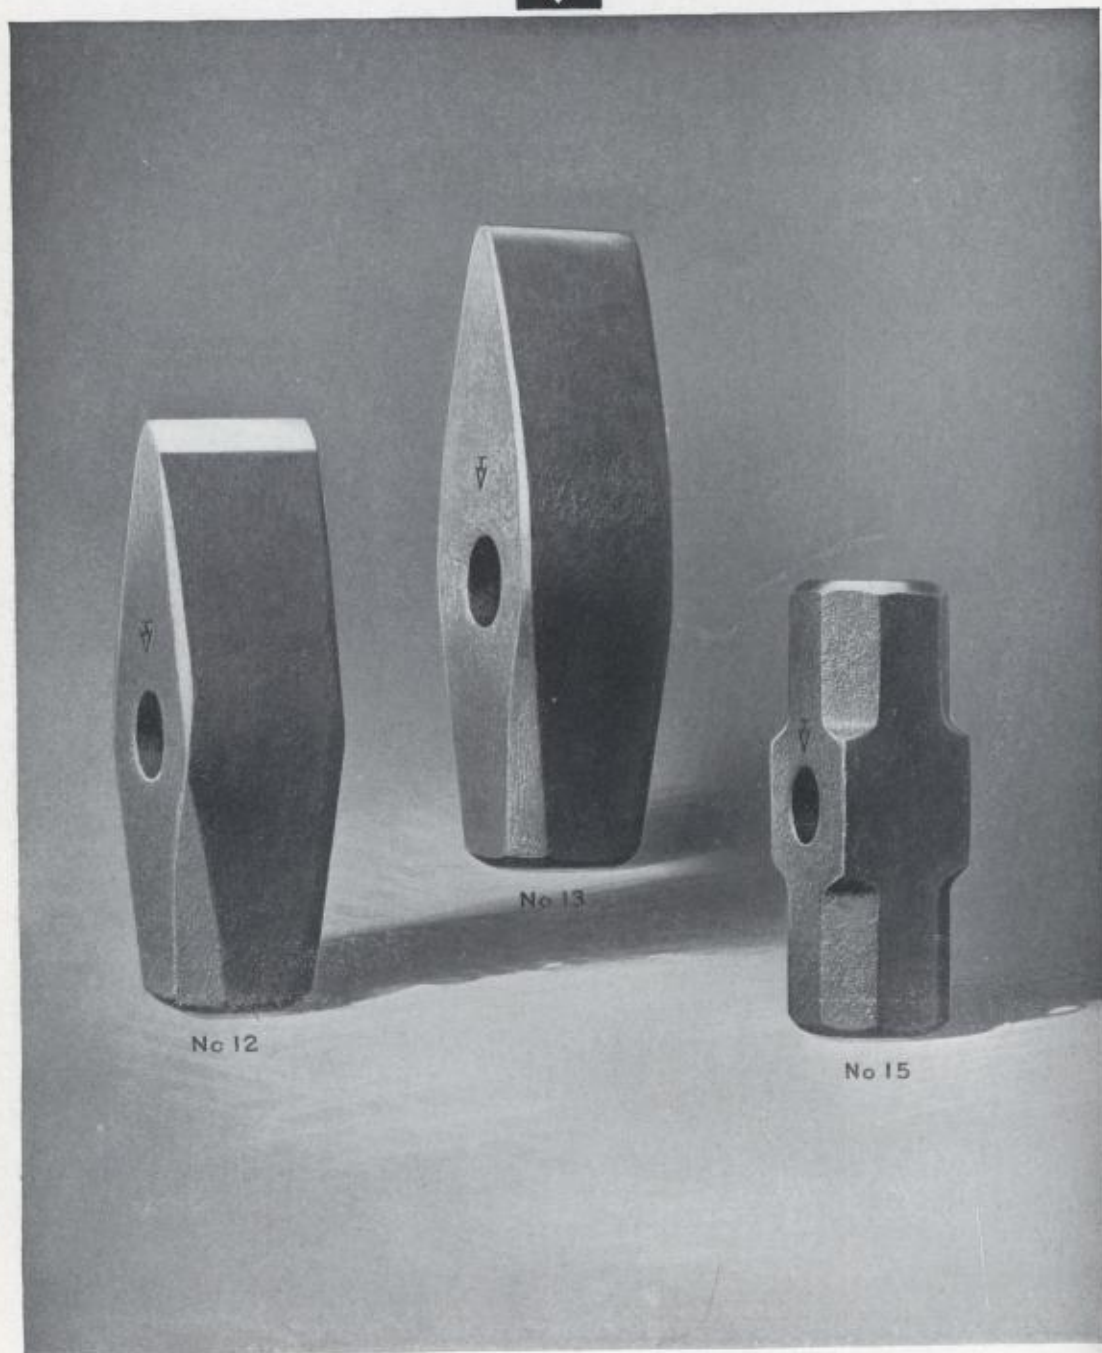

No. 12 Stone Sledge (Flat or Oval Face)  
Cutting Edge

Weight	Length
8 Lb.	7 $\frac{1}{4}$ "
10 Lb.	7 $\frac{3}{4}$ "
12 Lb.	8 $\frac{1}{4}$ "
14 Lb.	8 $\frac{3}{4}$ "
16 Lb.	9 $\frac{1}{4}$ "
18 Lb.	9 $\frac{1}{2}$ "
20 Lb.	9 $\frac{3}{4}$ "
24 Lb.	10 $\frac{1}{4}$ "

No. 15 Double Face Blacksmith's Sledge  
A. R. E. A. Plan No. 13

Weight	Length	Weight	Length
2 Lb.	4 $\frac{1}{4}$ "	14 Lb.	8"
2 $\frac{1}{2}$ Lb.	4 $\frac{1}{2}$ "	16 Lb.	8 $\frac{1}{4}$ "
3 Lb.	4 $\frac{3}{4}$ "	18 Lb.	8 $\frac{1}{2}$ "
4 Lb.	5 $\frac{1}{4}$ "	20 Lb.	8 $\frac{3}{4}$ "
5 Lb.	5 $\frac{1}{2}$ "	24 Lb.	9 $\frac{1}{4}$ "
6 Lb.	6"		
8 Lb.	6 $\frac{1}{4}$ "		
10 Lb.	7"		
12 Lb.	7 $\frac{1}{4}$ "		

No. 13 Stone Sledge Flat or Oval Face. Weight and Length same as above.  
Also furnished in "VERONALLOY", a Special Alloy Steel  
*All sledges specially heat treated and tempered*



No 28




No 44



No 108

No. 28 Blacksmith's Sledge (Cross or Straight Pein)				No. 44 Ore Sledge	No. 108 Molders Sledge
Weight	Length	Weight	Length	Weight	Weight
6 Lb.	6 $\frac{1}{2}$ "	12 Lb.	8"	6 to 14 Lbs.	10 Lbs.
8 Lb.	7"	14 Lb.	8 $\frac{1}{2}$ "		
10 Lb.	7 $\frac{1}{2}$ "	16 Lb.	9"		

*All sledges specially heat treated and tempered*

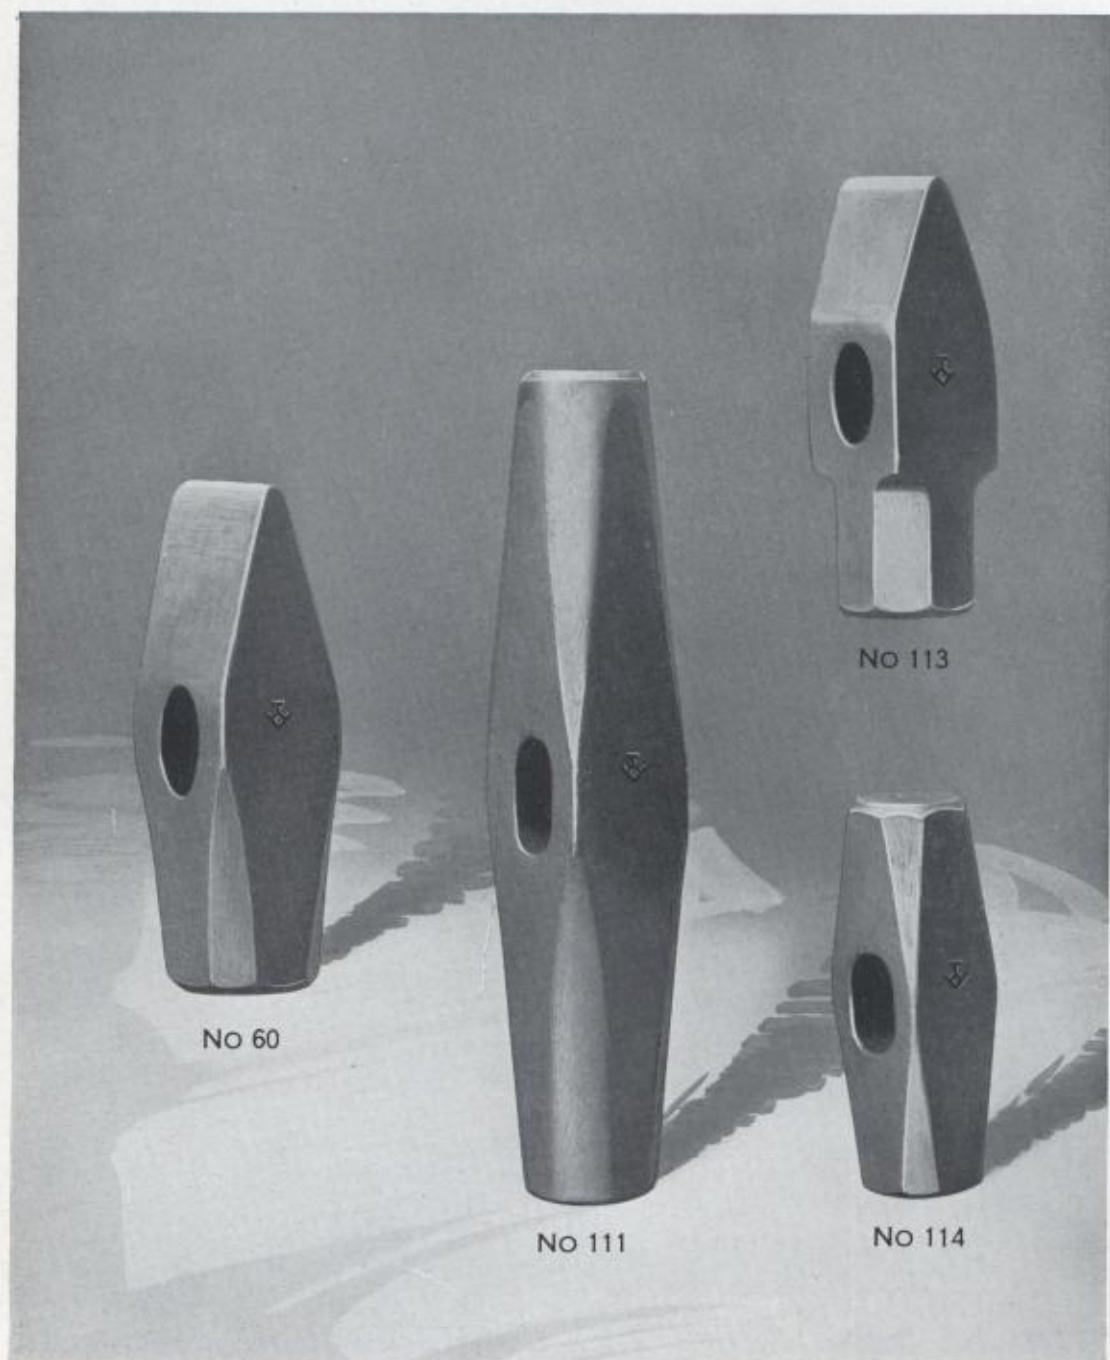

- No. 60. Blacksmiths-Hand Hammer. Weights  $1\frac{1}{2}$  to 4 pounds.  
No. 111. Riveting Hammer. Standard weight 5 pounds.  
No. 113. Blacksmiths' Hand Hammer (Straight or Cross Pien). Weights  $1\frac{1}{2}$  to 4 pounds.  
No. 114. Engineers' Hammer (Double Face). Weights  $1\frac{1}{2}$  to 4 pounds.

*All hammers specially heat treated and tempered*





NO 14



NO 16




NO 52

No. 14 Hand Drilling Hammer		No. 16 Striking or Drilling Hammer	
Long Pattern		Short or Oregon Pattern	
Weight	Length	Weight	Length
3 Lb.	5 1/4"	2 Lb.	3 1/2"
3 1/2 Lb.	5 1/2"	2 1/2 Lb.	3 3/4"
4 Lb.	5 3/4"	3 Lb.	4"
		3 1/2 Lb.	4 1/4"
		4 Lb.	4 1/2"

No. 16 Striking or Drilling Hammer		No. 52 Striking or Drilling Hammer	
Short or Oregon Pattern		Long or Nevada Pattern	
Weight	Length	Weight	Length
3 Lb.	4 1/2"	3 Lb.	5 1/4"
4 Lb.	5"	3 1/2 Lb.	5 1/2"
6 Lb.	5 3/4"	4 Lb.	5 3/4"
7 Lb.	6"	5 Lb.	6 1/4"
8 Lb.	6 1/4"	6 Lb.	6 1/2"
10 Lb.	6 3/4"	7 Lb.	7"
12 Lb.	7 1/4"	8 Lb.	7 1/4"
		10 Lb.	7 3/4"
		12 Lb.	8"
		14 Lb.	8 1/4"
		16 Lb.	8 1/2"
		20 Lb.	9"

No. 52 Striking or Drilling Hammer. Same Weight and Length as No. 16

Also furnished in "VERONALLOY", a special Alloy Steel  
All hammers specially heat treated and tempered

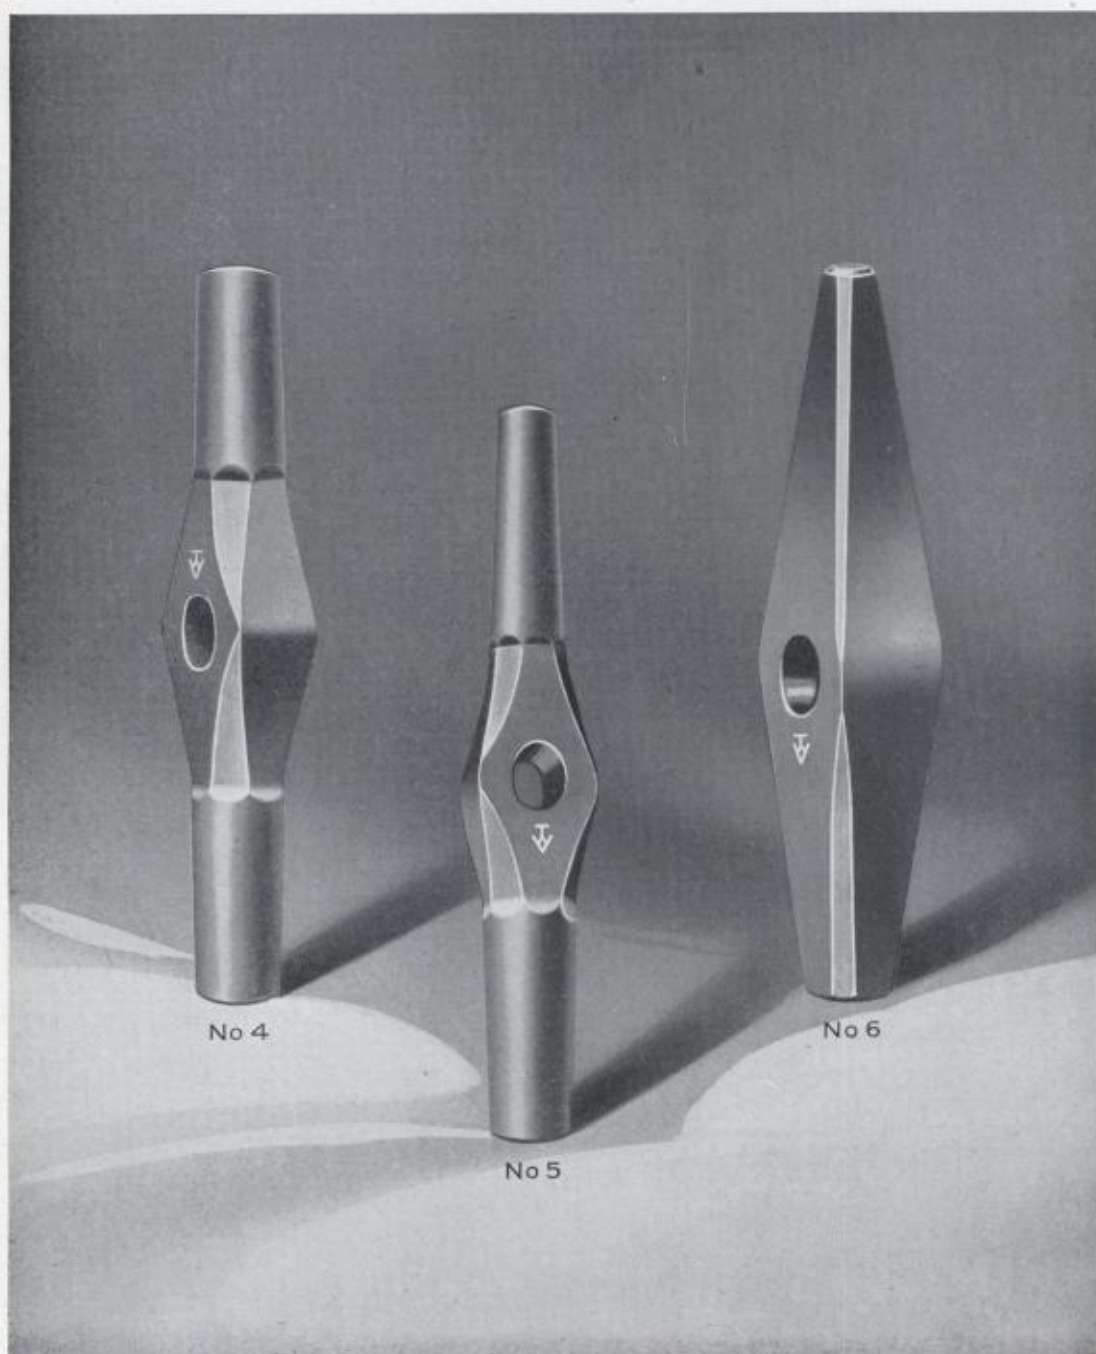

- No. 4. Spike Maul. A. R. E. A. No. 1, Plan No. 3, Bell Pattern Weights, 8, 9 and 10 pound, 14-inch. Diameter both faces identical.
- No. 5. Spike Maul. A. R. E. A. No. 2, Plan No. 3, Bell Pattern. Weights 8, 9 and 10 pound, 15-inch.
- No. 6. Spike Maul. Standard or Railroad Pattern, 6, 8, 9 and 10 pounds.  
Also furnished in "VERONALLOY," a Special Alloy Steel

*All mauls specially heat treated and tempered*



No 47



No 58



No 72

No. 47 Wood Choppers' Maul  
Straight Bit

Weight	Length
5 Lb.	7½"
6 Lb.	8"
7 Lb.	8¾"
8 Lb.	8½"

No. 72 Wood Choppers' Maul  
(Oregon O Eye)


Weight	Length
6 Lb.	8½"
7 Lb.	8¾"
8 Lb.	9½"
9 Lb.	9½"
10 Lb.	9¾"

No. 58 Ship or Top Maul

Weight	Length
4 Lb.	8¼"
5 Lb.	8¾"
6 Lb.	9"

No. 72½ Wood Choppers' Maul (Oregon Axe Eye). Single or Double Bit. Weight and Length same as No. 72.  
All mauls specially heat treated and tempered




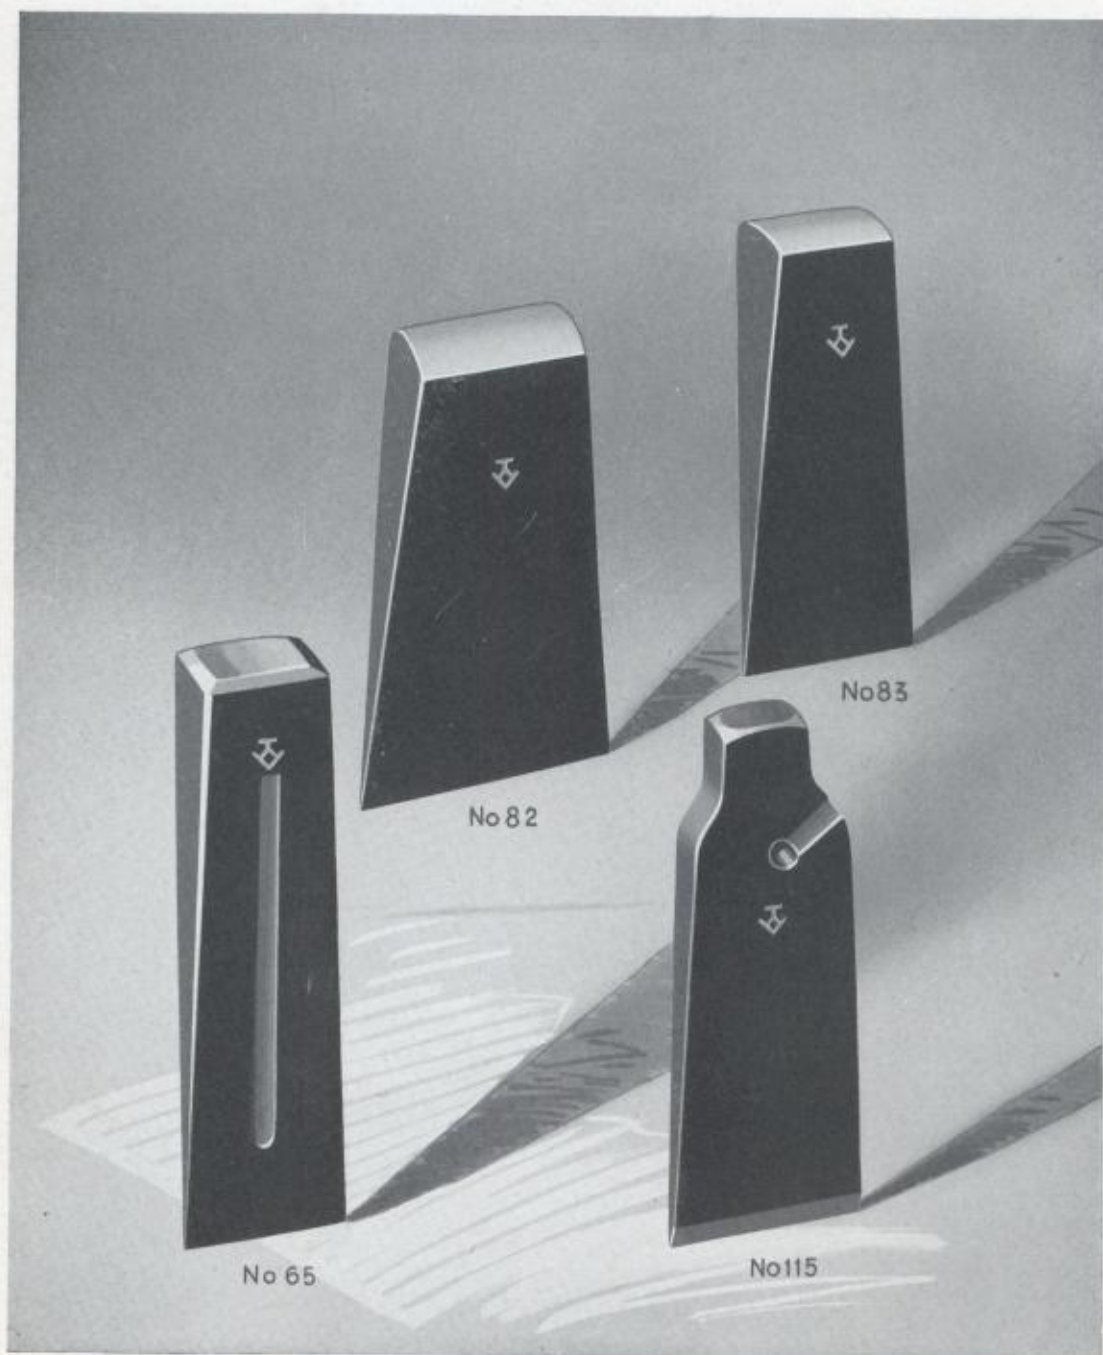

- No. 82. Stave Wedge. Weights 3,  $3\frac{1}{2}$ , 4,  $4\frac{1}{2}$  and 5 pounds.  
No. 83. Tie Wedge. Weights 3,  $3\frac{1}{2}$ , 4,  $4\frac{1}{2}$  and 5 pounds.  
No. 65. Common or Square Head Wedge. Weights 3,  $3\frac{1}{2}$ , 4,  $4\frac{1}{2}$ , 5, 6, 7, 8 and 10 pounds.  
No. 115. Improved Saw Wedge. Weights  $\frac{1}{2}$ ,  $\frac{3}{4}$ , 1,  $1\frac{1}{2}$ , 2,  $2\frac{1}{2}$  and 3 pounds.




- No. 71. Splitting Wedge (Oregon Pattern). Weights 5, 6, 7 and 8 pounds.  
No. 30. Stone Wedge. Weights  $1\frac{1}{2}$ , 2, 3 and 4 pounds.  
No. 70A. Falling Wedge. Weights 5, 6, 7, 8, 9 and 10 pounds.  
No. 70. Truckee Wedge. Flared Bit. Weights 4, 5, 6 and 8 pounds.  
No. 27. Truckee Pattern Wedge. Weights  $3\frac{1}{2}$ , 4,  $4\frac{1}{2}$ , 5, 6, 7, 8 and 10 pounds.

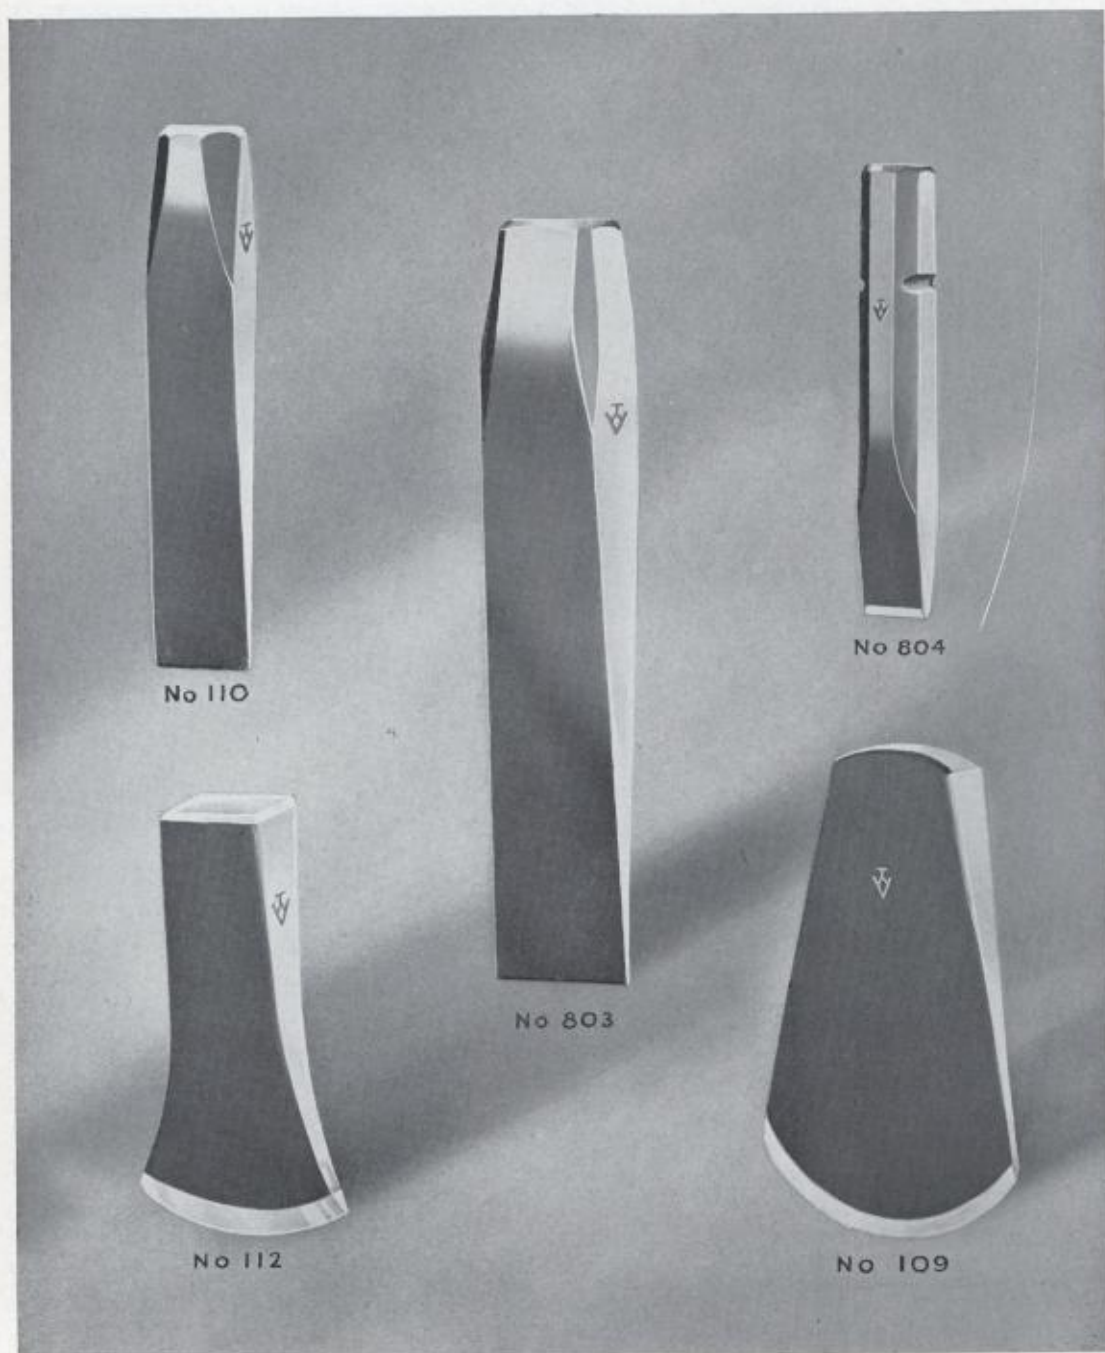

- No. 110. Falling Wedge, Lake Superior. Weights 6 and 8 pounds.  
No. 804. Rock Wedge. Weights 4, 5 and 6 pounds.  
No. 803. Frost Wedge. Weights 14, 16, 18 and 20 pounds.  
No. 112. Cedar Splitting Wedge. Weights 5, 6, 7 and 8 pounds.  
No. 109. Bucking Wedge, Pacific Coast. Weights 6, 7 and 8 pounds.



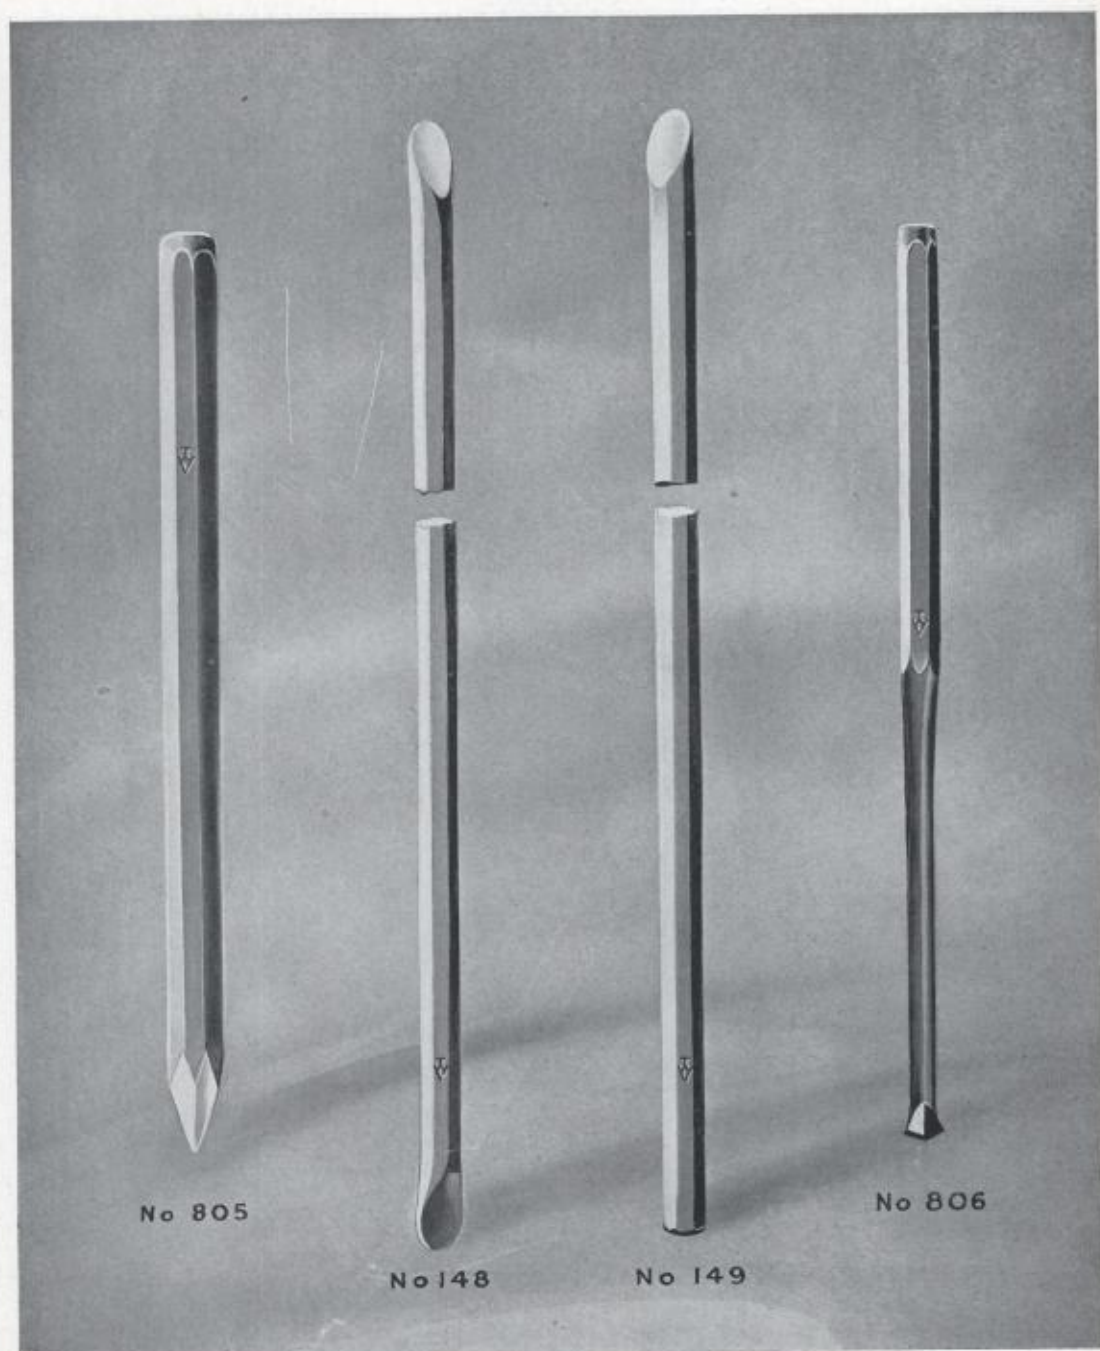


No 805

No 148

No 149

No 806

- No. 805. Bull Point, Hand. Octagon Steel. Any Length.  
No. 148. Stone Drill, Double Bit. Any Length.  
No. 149. Stone Drill, Single Bit. Any Length.  
No. 806. Plug Drill, Hand.  $\frac{5}{8}$ " bit 18" and  $\frac{3}{4}$ " bit 18".

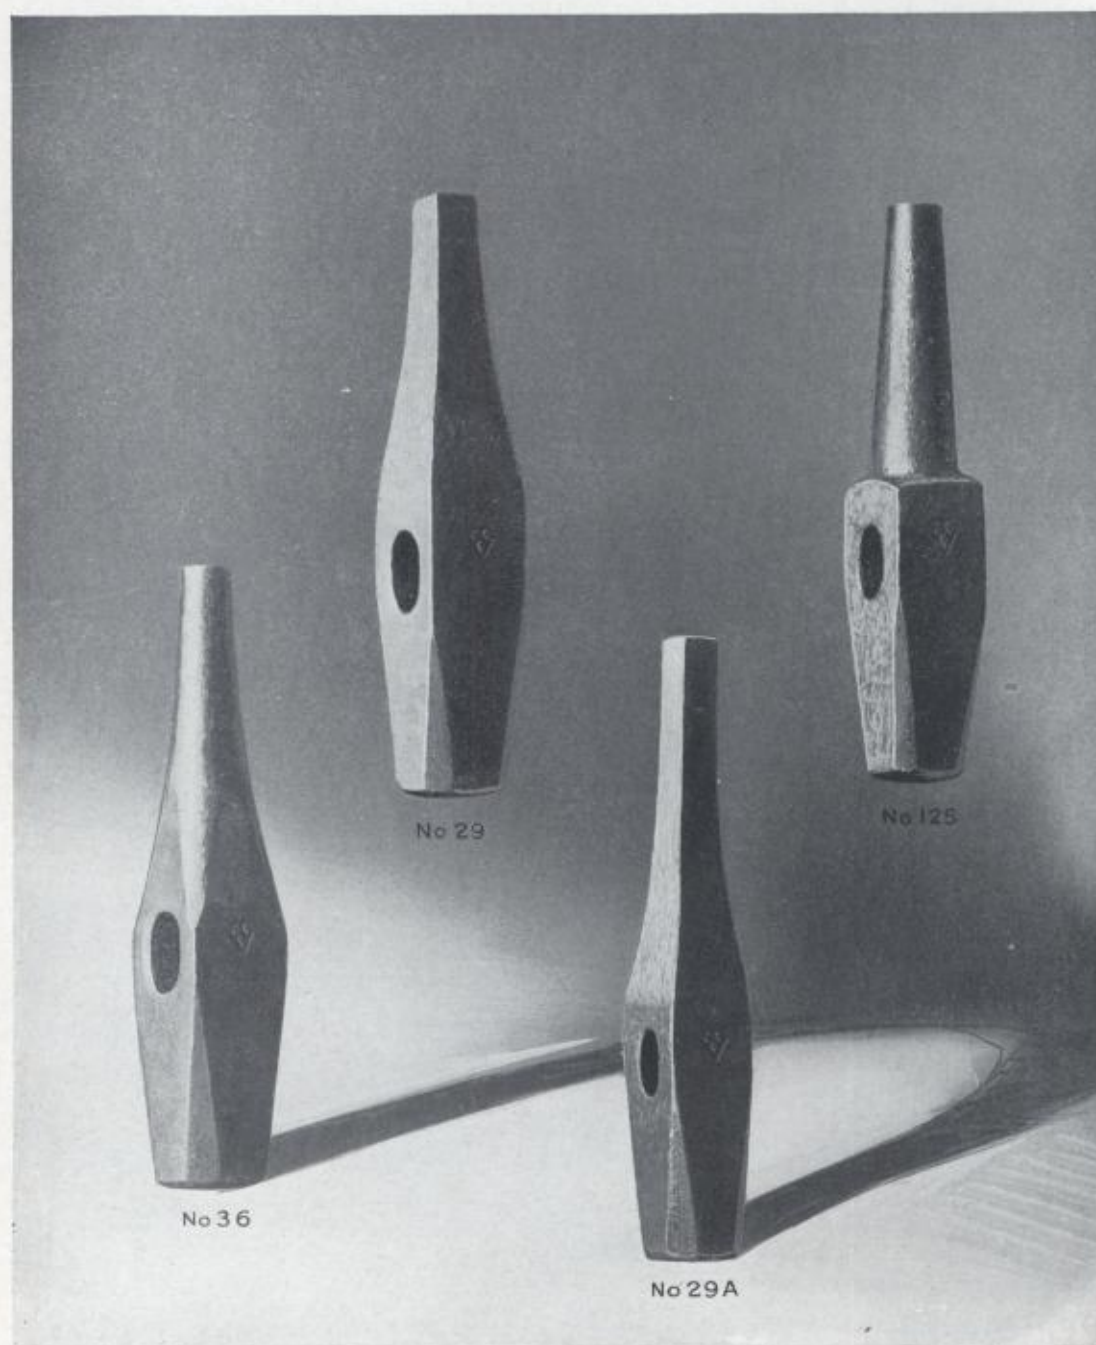

- No. 36. Track Punch (Round Point). A. R. E. A. Plan 19.  $\frac{3}{8}$ -inch to 1-inch.  
No. 29. Track Punch (Square Point). Weight 5 pounds.  
No. 29A. Tie Plug Punch. A. R. E. A. Plan No. 18. Weight  $3\frac{1}{2}$  pounds.  
No. 125. Backing Out Punch. Sizes  $\frac{3}{8}$ -inch to 1-inch.

*All made of special steel, heat treated*



No 128



No 126



No 127



No 129

- No. 128. Button Set.  
No. 127. Rivet Busters. Weight 3, 4 and 5 pounds.  
No. 126. Handle Gouge. Standard weight  $3\frac{1}{4}$  pounds.  
No. 129. Button Set.


Button sets made for rivets  $\frac{1}{2}$ -inch and up.

*All special steel, heat treated*





No 66

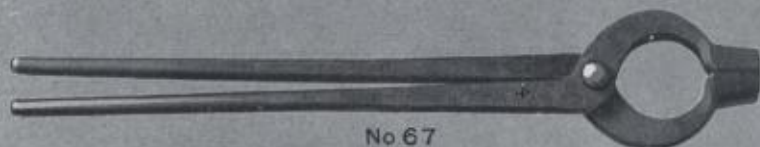

No 67




No 68



No 121



No 122



No 123

- No. 66. Pick Tongs. 24-inch length.  
No. 67. Gad Tongs, Flat Jaw. 18, 20 and 24-inch lengths.  
No. 68. Straight Lip Tongs. 16, 18, 20, 22 and 24-inch lengths.  
No. 121. Sticker Tongs. 18-inch length.  
No. 122. Single Pick Up Tongs. 18, 20, 22 and 24-inch lengths.  
No. 123. Double Pick Up Tongs. 18, 20, 22 and 24-inch lengths.



No 69



No 136



No 38



No 39




No 156



No 157


- No. 69. Rivet Tongs. 18, 20, 22 and 24-inch lengths.  
No. 136. Bolt or Curved Lip Tongs. 18, 20, 22, 24 and 26-inch lengths.  
No. 38. Top Fullers. Size of Groove  $\frac{1}{4}$ -inch to 2-inch.  
No. 39. Bottom Fullers. Size of Groove  $\frac{1}{4}$ -inch to 2-inch.  
No. 156. Top Swages. Size of Groove  $\frac{1}{4}$ -inch to 3-inch.  
No. 157. Bottom Swages. Size of Groove  $\frac{1}{4}$ -inch to 3-inch.  
Other dimension information in price list.

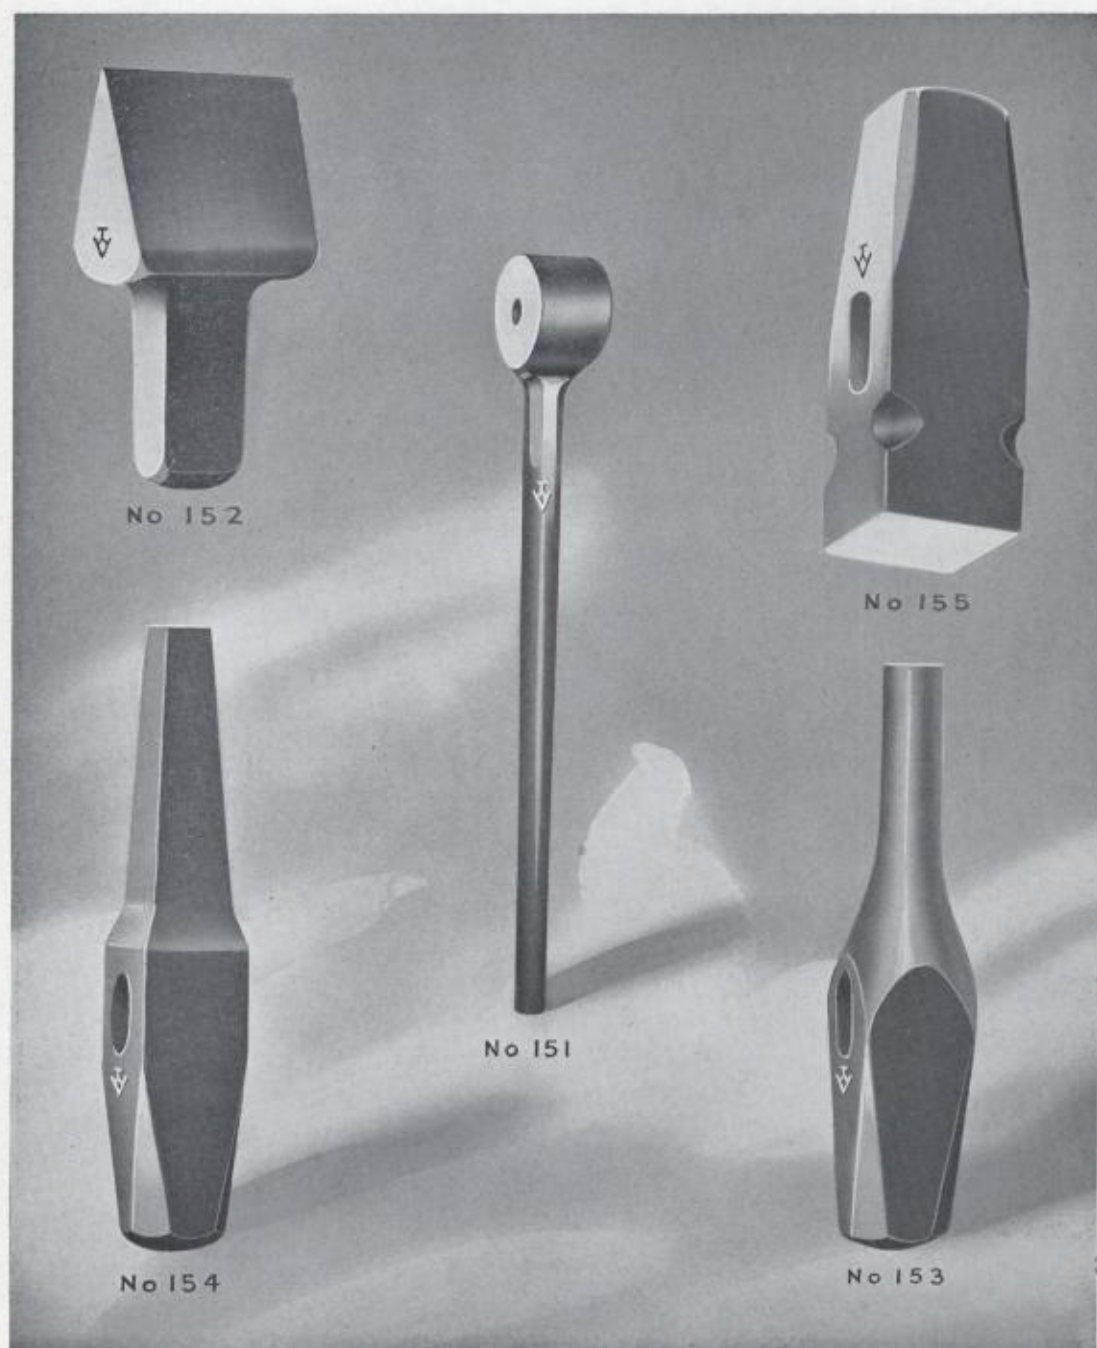

- No. 152. Hardies.  $\frac{1}{2}$ -inch to  $1\frac{1}{4}$ -inch square shank.  
No. 155. Set Hammers. Weights  $1\frac{1}{2}$ , 2 and  $2\frac{3}{4}$  pounds.  
No. 151. Heading Tool.  $\frac{1}{4}$ -inch to 1-inch Hole.  
No. 154. Square End Punch.  $\frac{1}{4}$ -inch to 1-inch Size Round.  
No. 153. Round End Punch.  $\frac{1}{4}$ -inch to 1-inch Size Square.


Dimension information in price list.



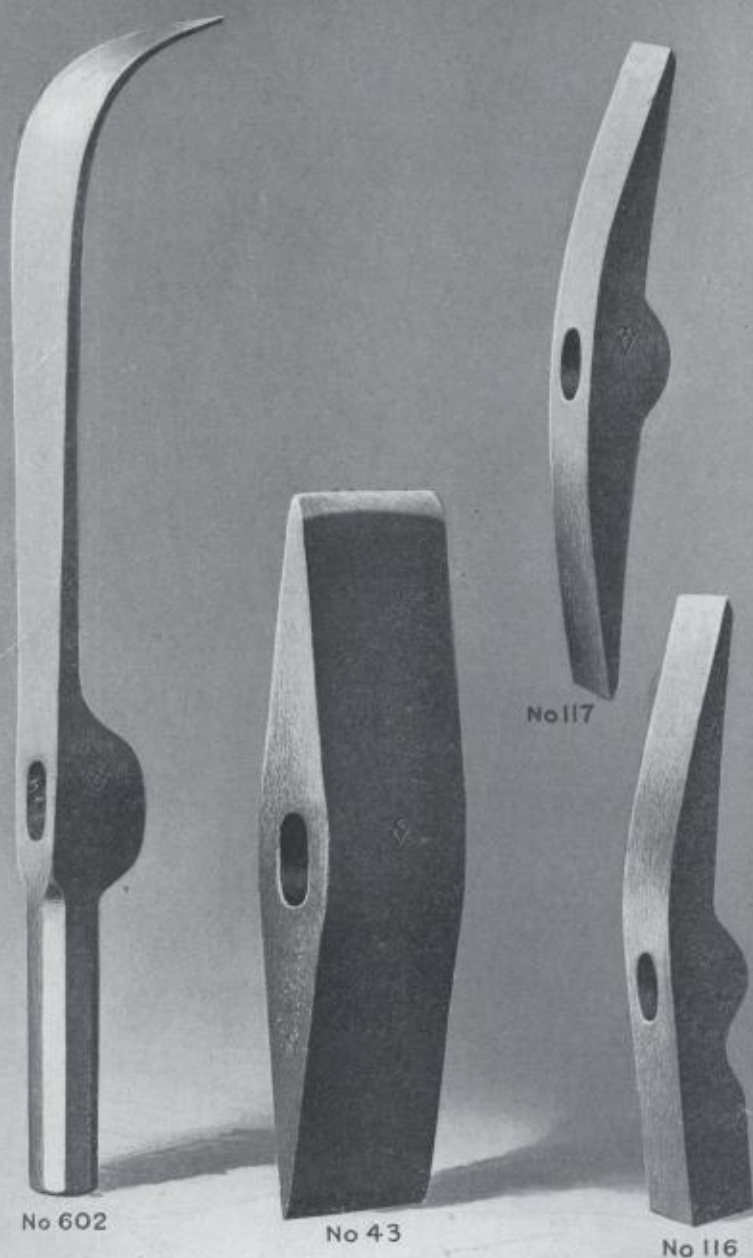

- No. 602. Paving Hammer. Weights 3 and 4 pounds.  
No. 43. Stone Axe. Double Bit. Weight 4 pounds.  
No. 117. Bricklayers' Skutch. Weights 2,  $2\frac{1}{2}$  and 3 pounds.  
No. 116. Bricklayers' Hammer. Weights  $1\frac{1}{2}$ , 2 and 3 pounds.

*All hammers specially heat treated and tempered*

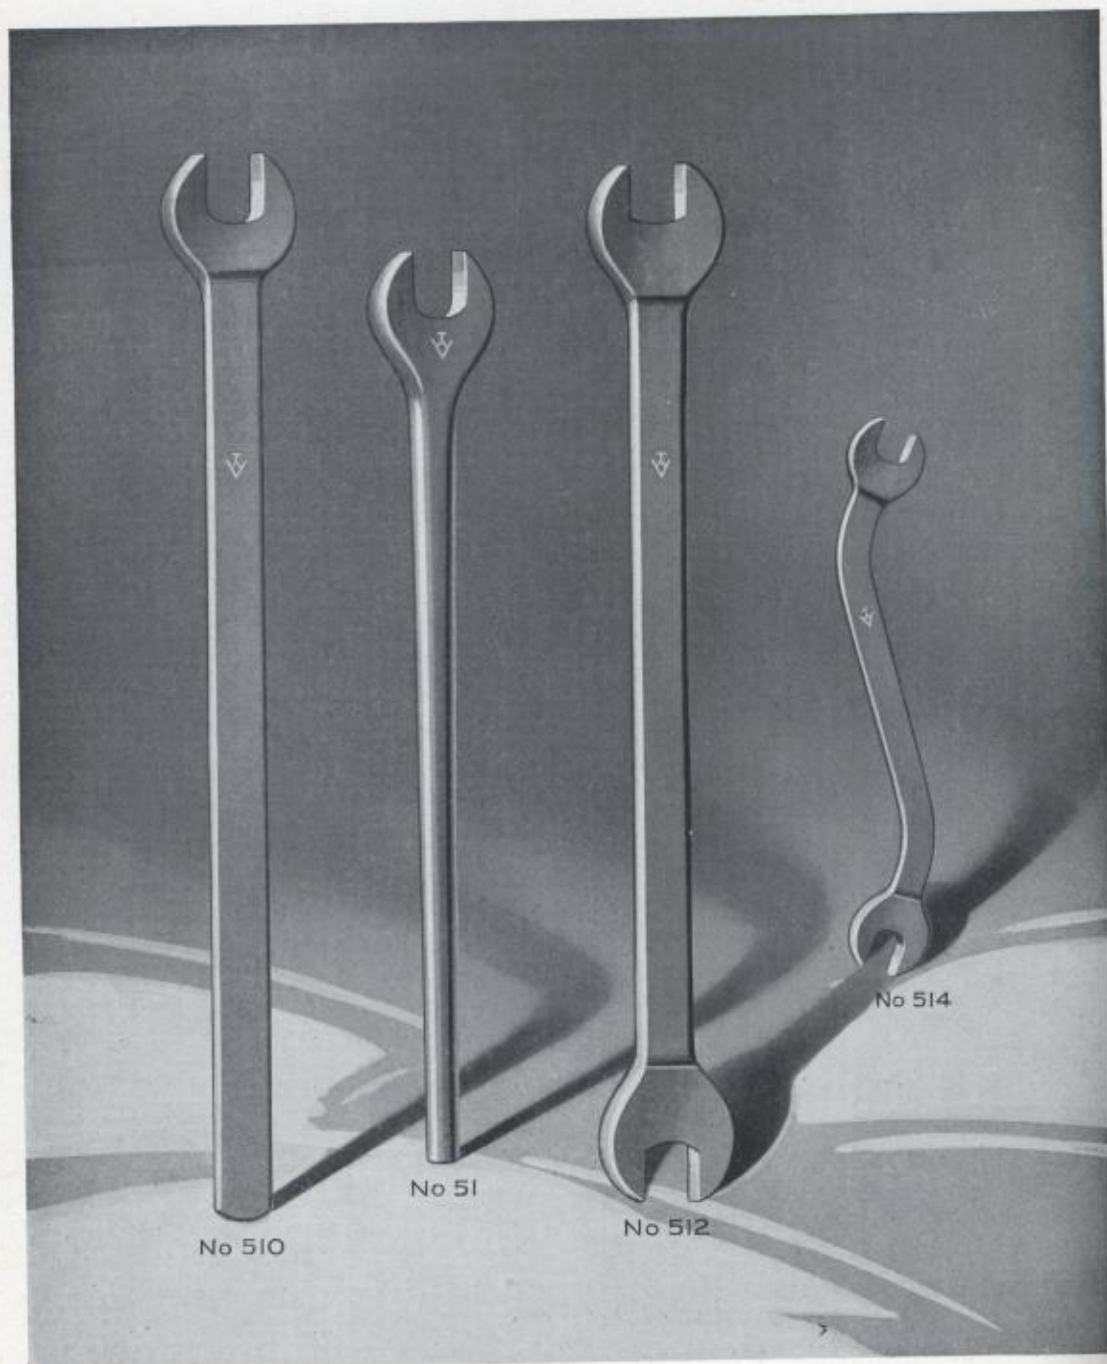


- |          |                                 |                           |                             |
|----------|---------------------------------|---------------------------|-----------------------------|
| No. 510. | Track Wrench.                   | Single end, Flat handle.  | } Specify<br>Jaw<br>Opening |
| No. 51.  | Track Wrench.                   | Single end, round handle. |                             |
| No. 512. | Track Wrench.                   | Double end, flat handle.  |                             |
| No. 514. | Car Repair Wrench, "S" Pattern. |                           |                             |

For  $\frac{3}{8}$  and  $\frac{1}{2}$ -inch bolts.  
 For  $\frac{1}{2}$  and  $\frac{5}{8}$ -inch bolts.  
 For  $\frac{5}{8}$  and  $\frac{3}{4}$ -inch bolts.  
 For  $\frac{3}{4}$  and  $\frac{7}{8}$ -inch bolts.

For  $\frac{7}{8}$  and 1-inch bolts.  
 For 1 and  $1\frac{1}{8}$ -inch bolts.  
 For  $1\frac{1}{8}$  and  $1\frac{1}{4}$ -inch bolts.  
 For  $1\frac{1}{4}$  and  $1\frac{3}{8}$ -inch bolts.

For  $1\frac{1}{4}$  and  $1\frac{1}{2}$ -inch bolts.  
 For  $1\frac{3}{8}$  and  $1\frac{1}{2}$ -inch bolts.  
 For  $1\frac{1}{2}$  and  $1\frac{5}{8}$ -inch bolts.  
 For  $1\frac{1}{2}$  and  $1\frac{3}{4}$ -inch bolts.

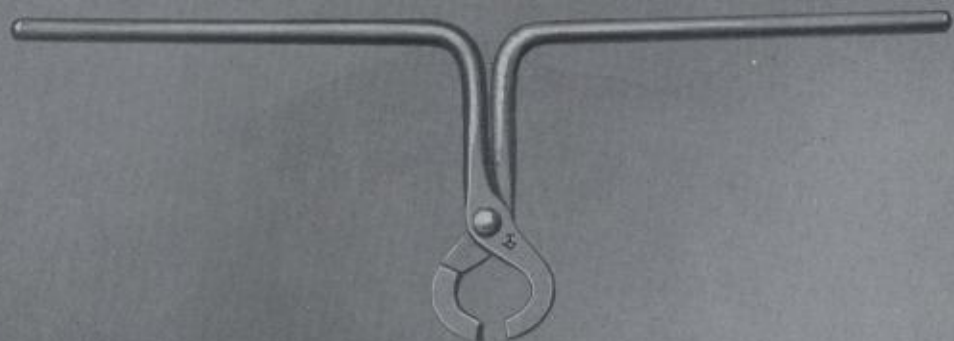

No 34




No 35




No 120

- No. 34. Rail Tongs. A. R. E. A. Plan No. 6. Weight about 22 pounds.  
No. 35. Rail Fork. A. R. E. A. Plan No. 10. Weight about 13 pounds.  
No. 120. Timber Tong or Logging Hook.



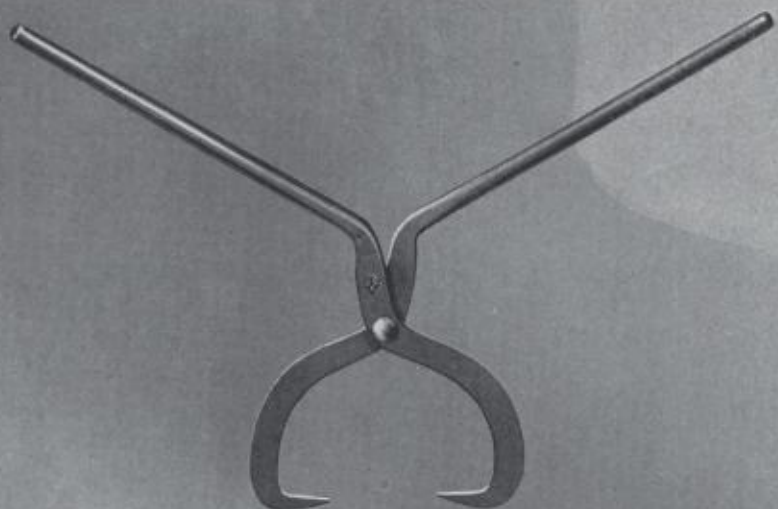

NO 34A

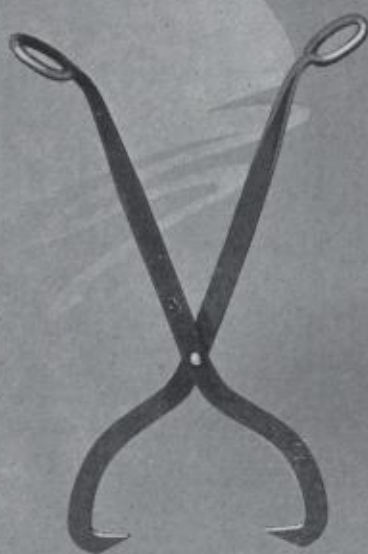


NO 34B




NO 34C

- No. 34A. Tie Tongs. A. R. E. A. Plan No. 3. Weight about 17 pounds.  
No. 34B. One-man Tie Tongs. A. R. E. A. Plan No. 7. Weight about 8 pounds.  
No. 34C. One-man Tie Tongs with Side Lug. (Patented Aug. 31, 1923). Weight about 9 pounds.

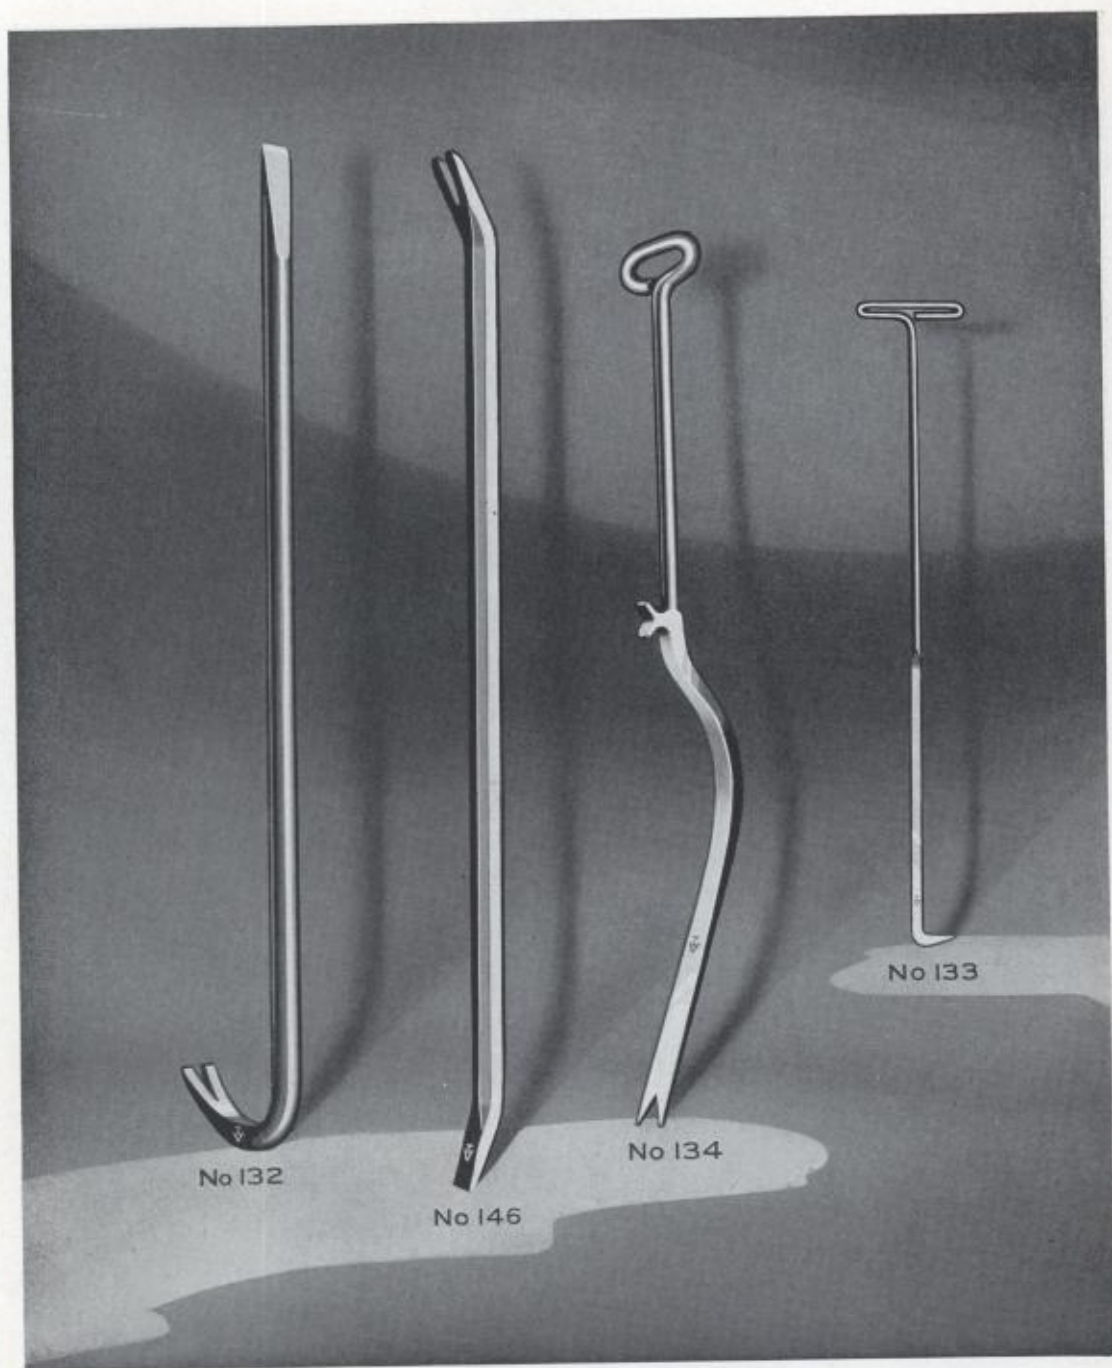

- No. 132. Wrecking Bar. Made Octagon in sizes  $\frac{5}{8} \times 12$ ,  $\frac{5}{8} \times 18$ ,  $\frac{3}{4} \times 24$ ,  $\frac{3}{4} \times 30$ ,  $\frac{3}{4} \times 36$ ,  $\frac{1}{2} \times 36$ -inches.  
No. 146. Carpenter Bar. Made Octagon in sizes  $\frac{5}{8} \times 12$ ,  $\frac{5}{8} \times 18$ ,  $\frac{3}{4} \times 24$ ,  $\frac{3}{4} \times 30$ ,  $\frac{3}{4} \times 36$ ,  $\frac{1}{2} \times 36$ -inches.  
No. 134. Packing Knife. A. R. A. standard. For packing and cleaning journal boxes.  
No. 133. Packing Hook. For packing and cleaning journal boxes.

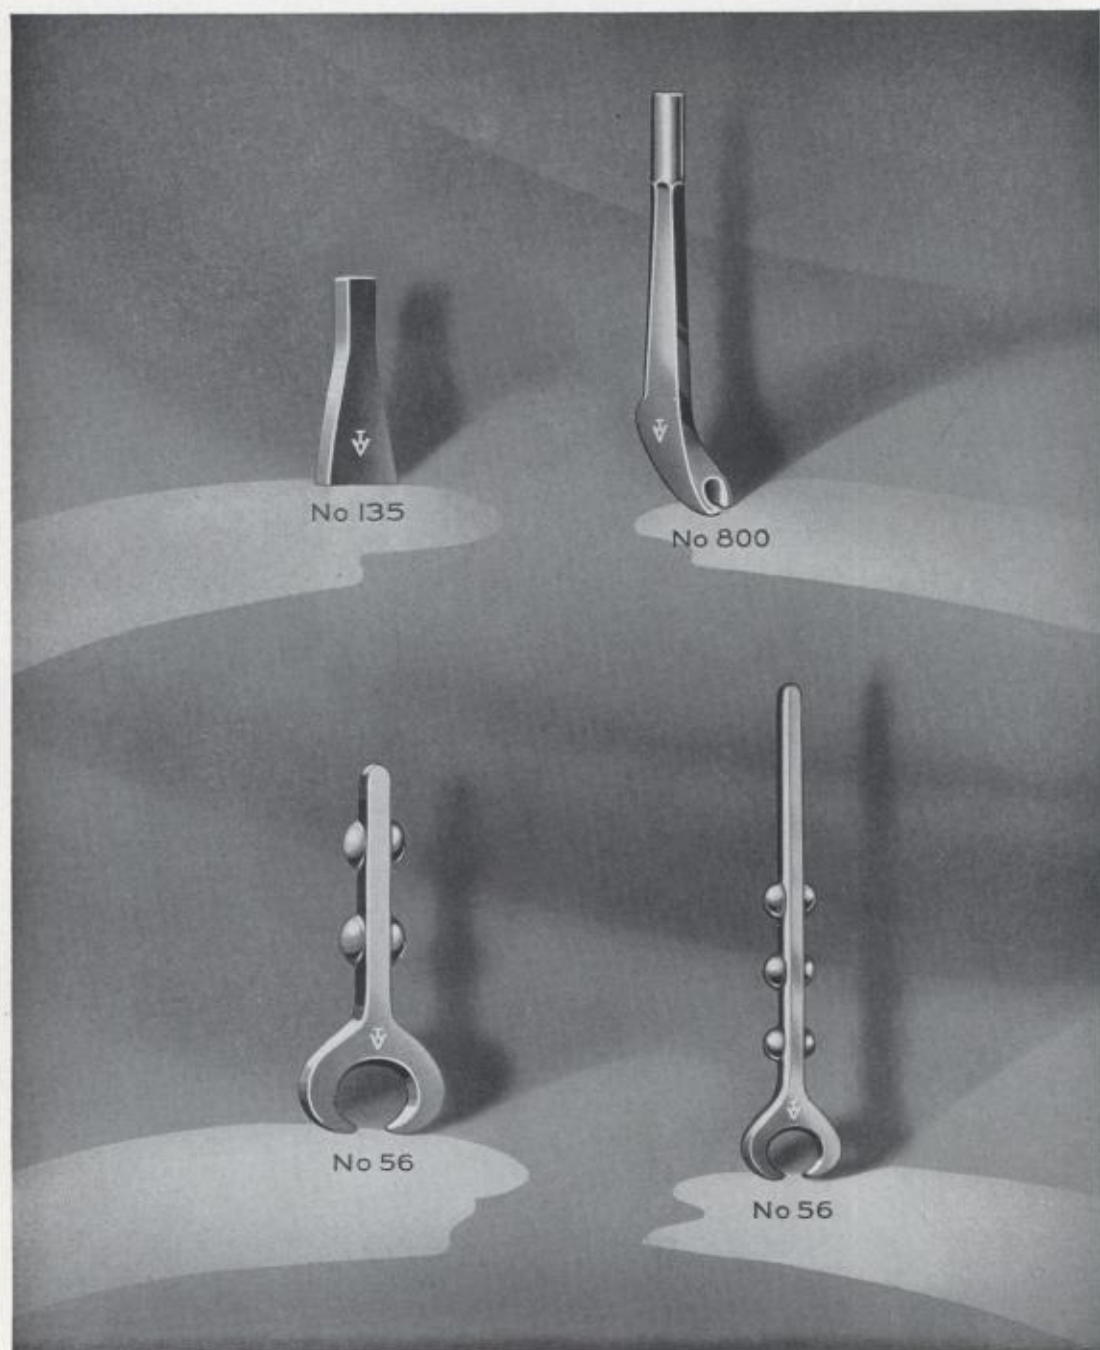

No. 135. Tamping Pick end to be welded. Weight  $2\frac{1}{2}$  pounds.


No. 800. Claw Bar Ends. Any style.

No. 56. 2 Knob Spike Puller. Weight  $1\frac{1}{2}$  pounds.


No. 56. 3 Knob Spike Puller. A. R. E. A. Plan No. 9. Weight  $2\frac{1}{4}$  pounds.

No. 56. 4 Knob Spike Puller. A. R. E. A. Plan No. 9. Weight  $2\frac{1}{2}$  pounds.



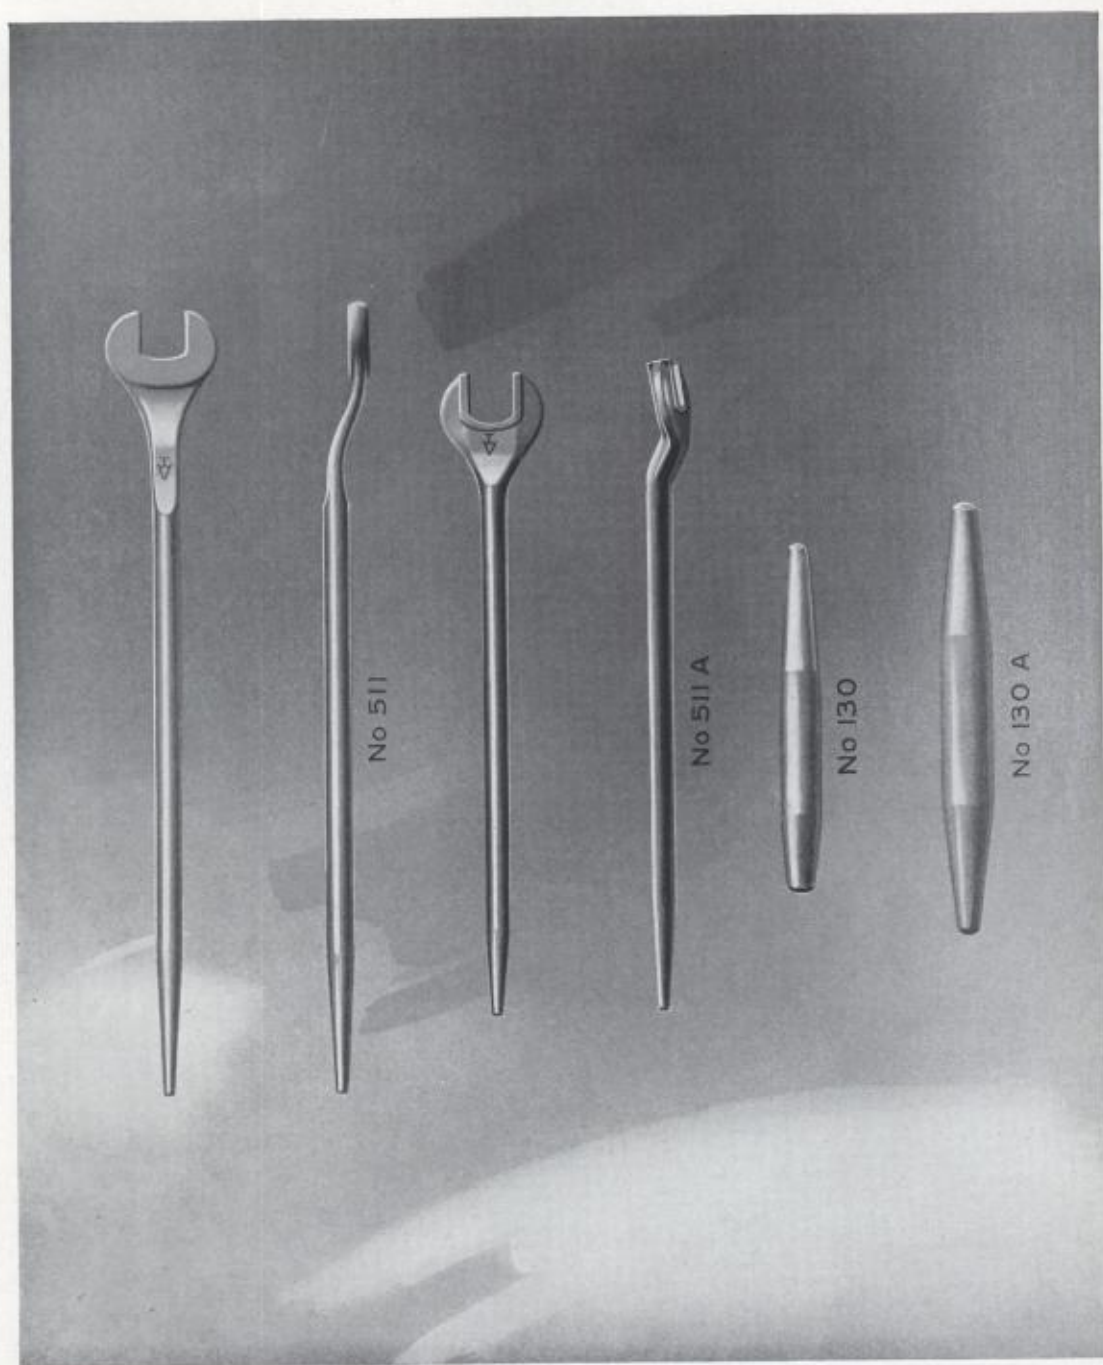


- |           |  |                            |
|-----------|--|----------------------------|
| No. 511.  | Construction Offset Wrench                           | } Specify Jaw<br>Opening   |
| No. 511A. | Construction Wrench-Rib Jaw-Bevel Head—Light weight. |                            |
| No. 130.  | Plug or Taper Type Drift Pin.                        | } Any size.<br>Any length. |
| No. 130A. | Barrell Type Drift Pin.                              |                            |

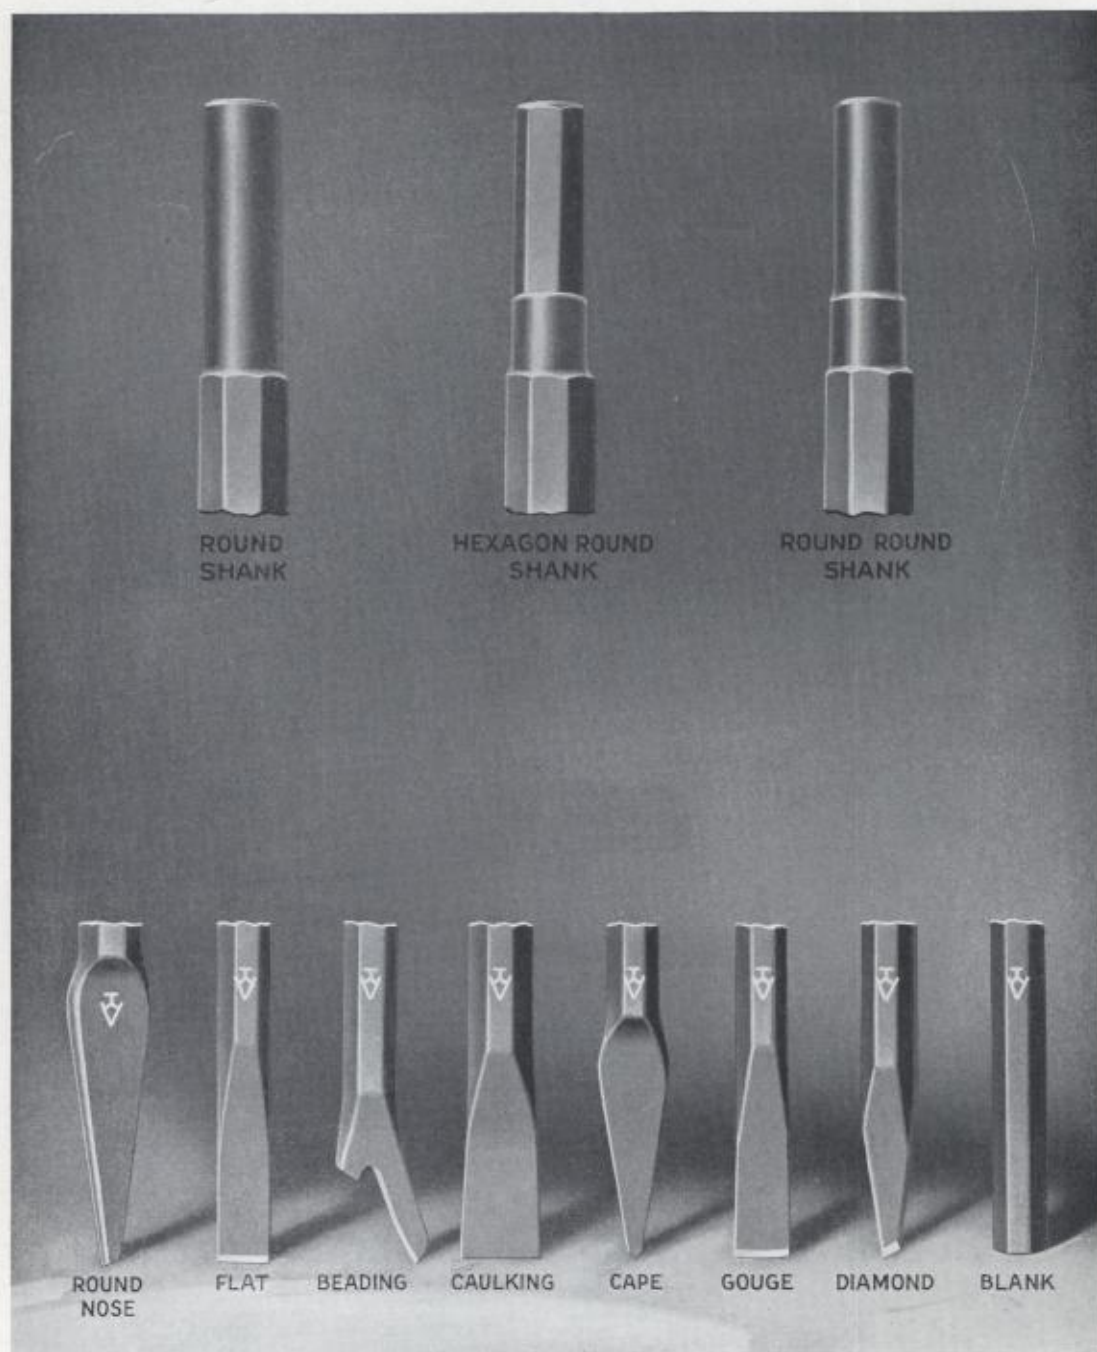

#### SMALL GUN PNEUMATIC TOOLS


Specify type of shank and length of tool.

Manufactured from high-grade carbon or "VERONALLOY" Steel.

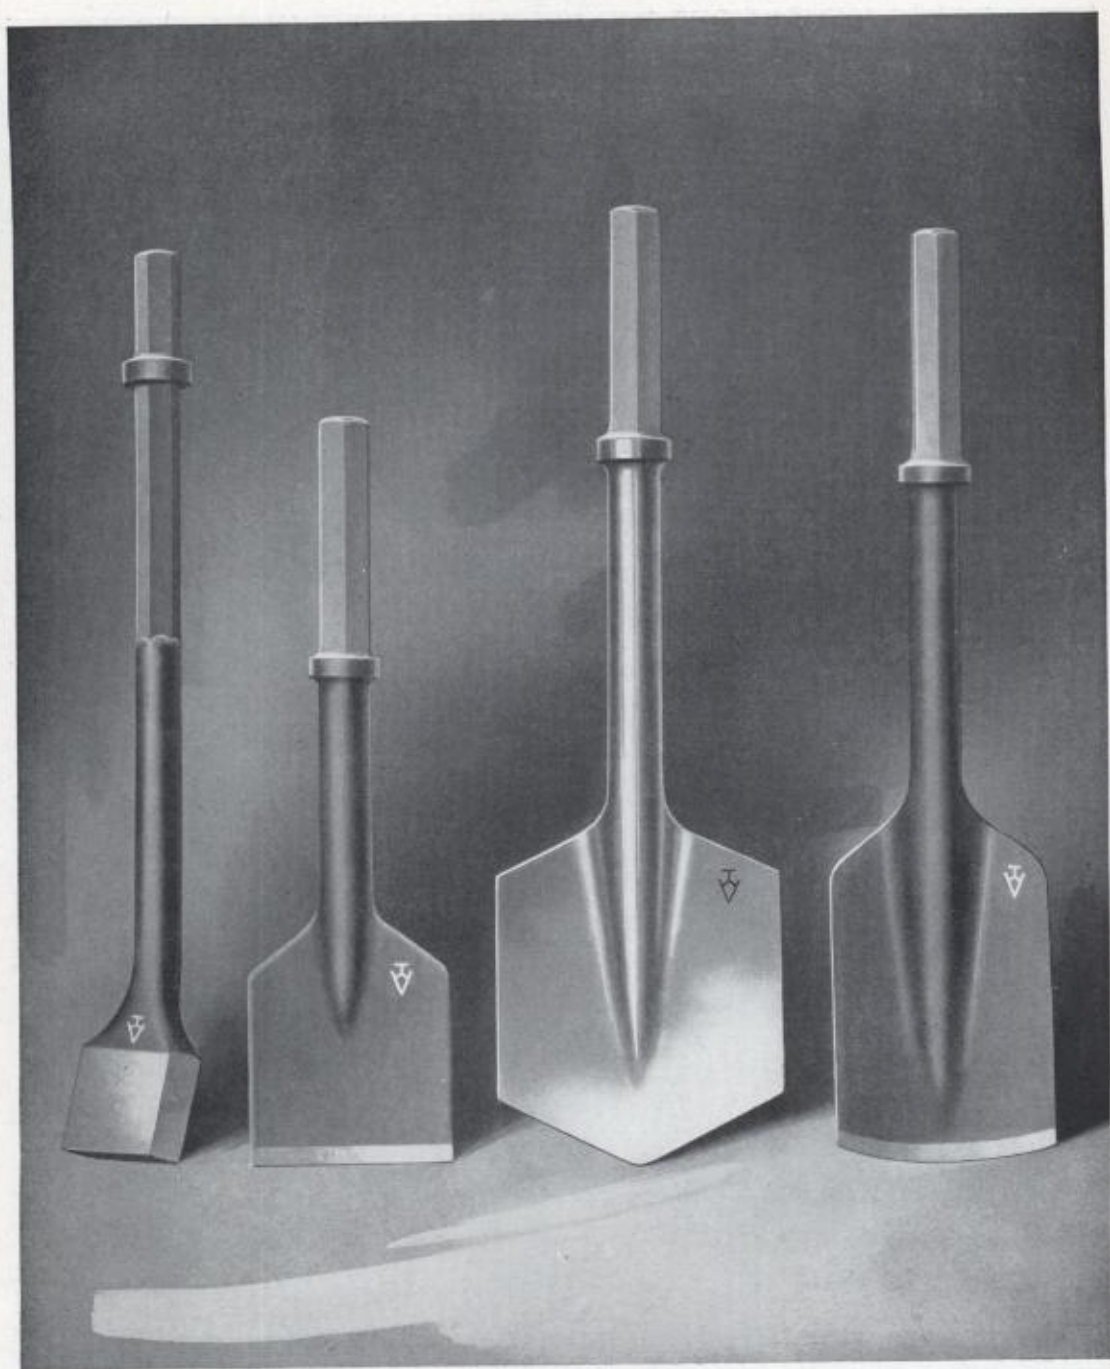


- No. P-TT-1. Pneumatic Tie Tamping Bar— $\frac{7}{8}$ "x $2\frac{9}{16}$ " Shank.  
No. P-AC-1. Asphalt Cutter  $1\frac{1}{8}$ "x6" Shank.  
No. P-AC-2. Asphalt Cutter  $1\frac{1}{4}$ "x6" Shank.  
No. P-BS-5. Breaking Spade— $1\frac{1}{8}$ "x6" Shank.  
No. P-BS-6. Breaking Spade— $1\frac{1}{4}$ "x6" Shank.  
No. P-S-1. Clay Spade  $1\frac{1}{8}$ "x6" Shank.  
No. P-S-2. Clay Spade  $1\frac{1}{4}$ "x6" Shank.



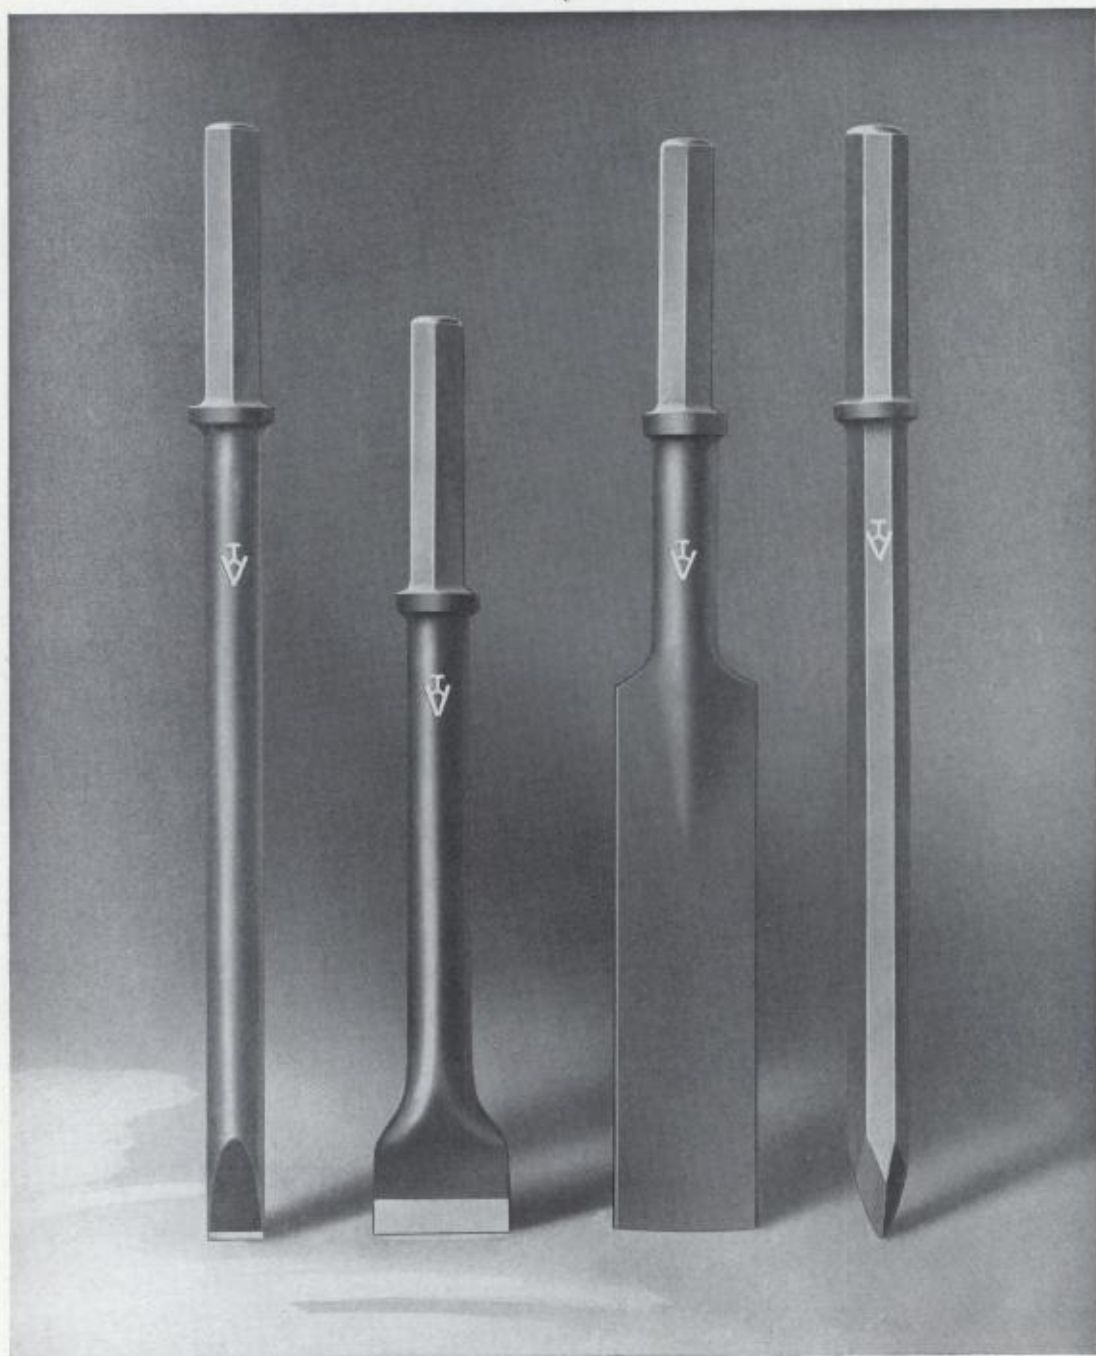

- No. P-CB-5. Narrow Chisel Bit—Width  $1\frac{3}{8}$ "—Length—14"-18"-24"-30"— $1\frac{1}{8}$ "x6" Shank.  
No. P-CB-6. Narrow Chisel Bit—Width  $1\frac{3}{8}$ "—Length—14"-18"-24"-30"— $1\frac{1}{4}$ "x6" Shank.  
No. P-CB-1. Wide Chisel Bit—Width 3"—Length 14"-18"-24"-30"— $1\frac{1}{8}$ "x6" Shank.  
No. P-CB-2. Wide Chisel Bit—Width 3"—Length 14"-18"-24"-30"— $1\frac{1}{4}$ "x6" Shank.  
No. P-DB-1. Digging Blade—Width 3"— $1\frac{1}{8}$ "x6" Shank.  
No. P-DB-2. Digging Blade—Width 3"— $1\frac{1}{4}$ "x6" Shank.  
No. P-M-1. Moil Point—Length 14"-18"-24"-30"— $1\frac{1}{8}$ "x6" Shank.  
No. P-M-2. Moil Point—Length 14"-18"-24"-30"— $1\frac{1}{4}$ "x6" Shank.

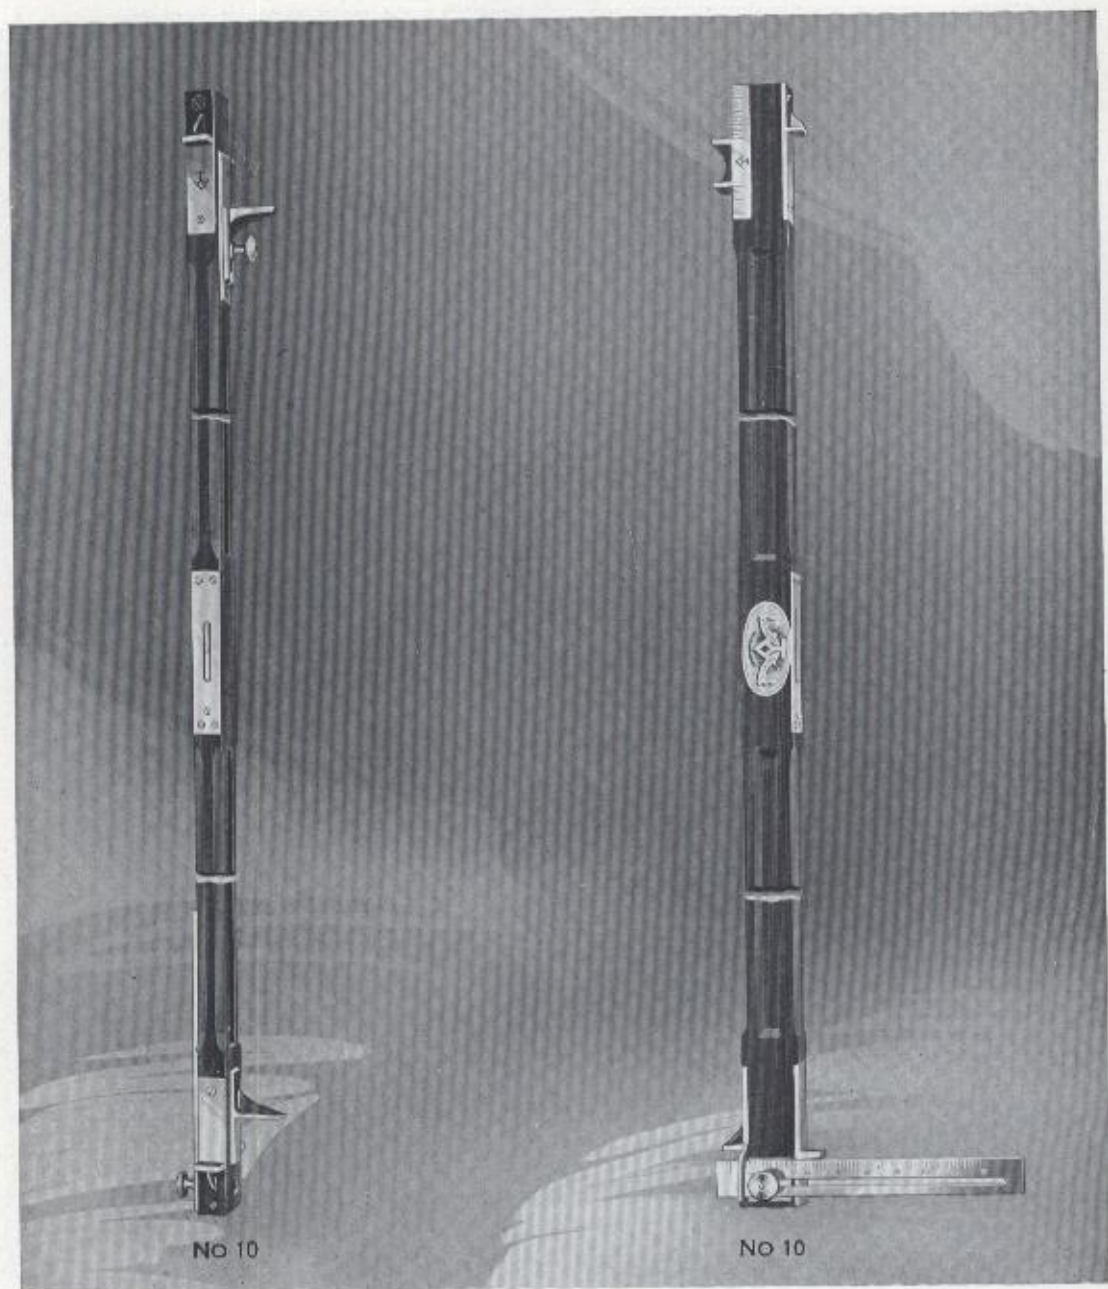


No. 10—Inspectors' level and gauge. (Patented Dec. 6, 1921; Nov. 16, 1926)

The most useful and complete instrument ever offered to maintenance of way officials for inspection purposes. It combines all of the needs of track inspection in one instrument.

- |   |  |
|---|--|
| 1. Track Level.                           | 4. Elevation scale.                                  |
| 2. Track gauge with guard rail lug.       | 5. Wheel gauge for measuring back to back of wheels. |
| 3. Master gauge for testing other gauges. |  |

Furnished in oak or redwood finish as desired. All metal parts are solid brass, nickel plated.

Weight only 5 pounds. Light, compact and convenient.

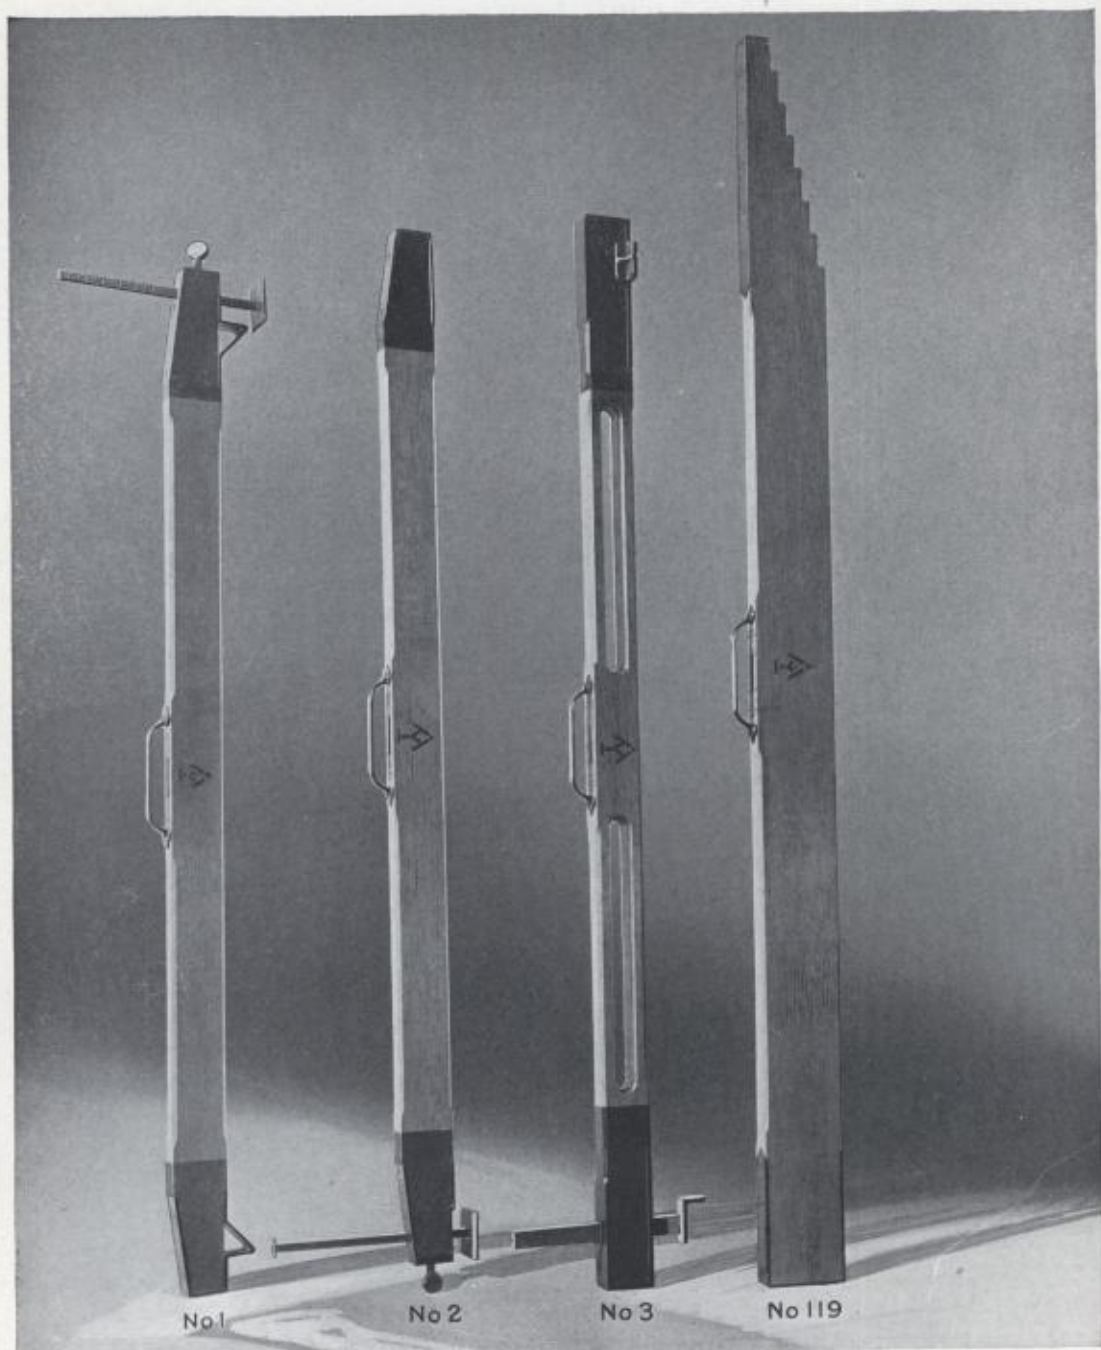

No. 1. Combination Level and Gauge. Adjustable spirit level.


No. 2. Track Level. Adjustable spirit level.

No. 3. Track Level. Adjustable spirit level.


Above made from selected California sugar pine.

No. 119. Step Level Board. Adjustable spirit level. Made from California redwood or California sugar pine.



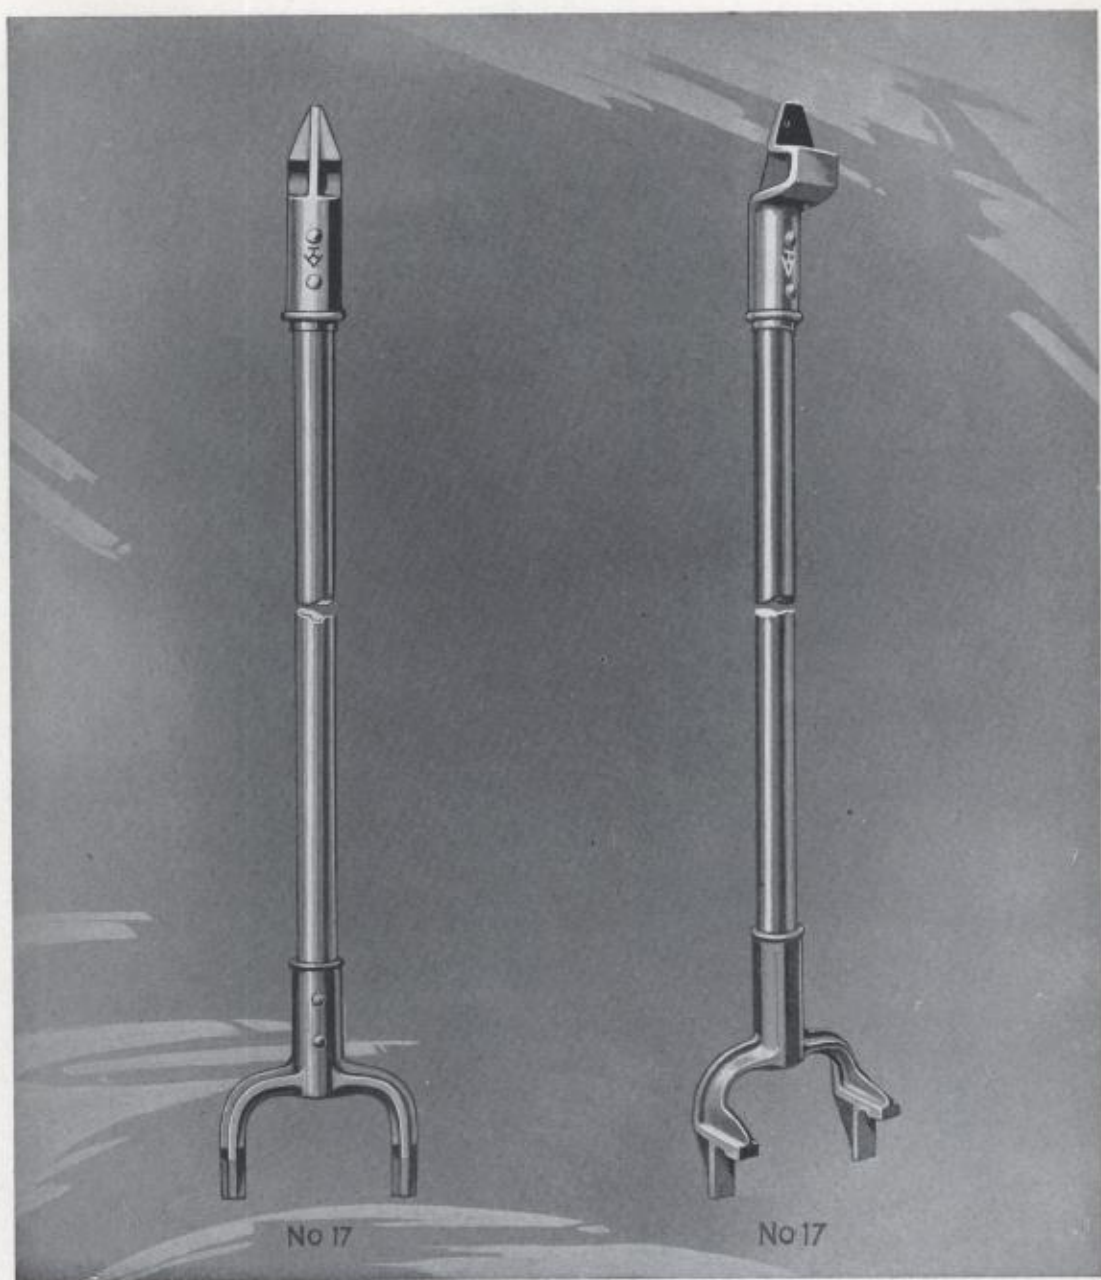

No. 17. Track Gauge. Latest approved design A. R. E. A. Plan No. 20. Sturdy, durable, insulated. Extra heavy pipe. All wearing parts are of steel. Recessed to gauge over burred rails. Weight approximately 17 pounds.

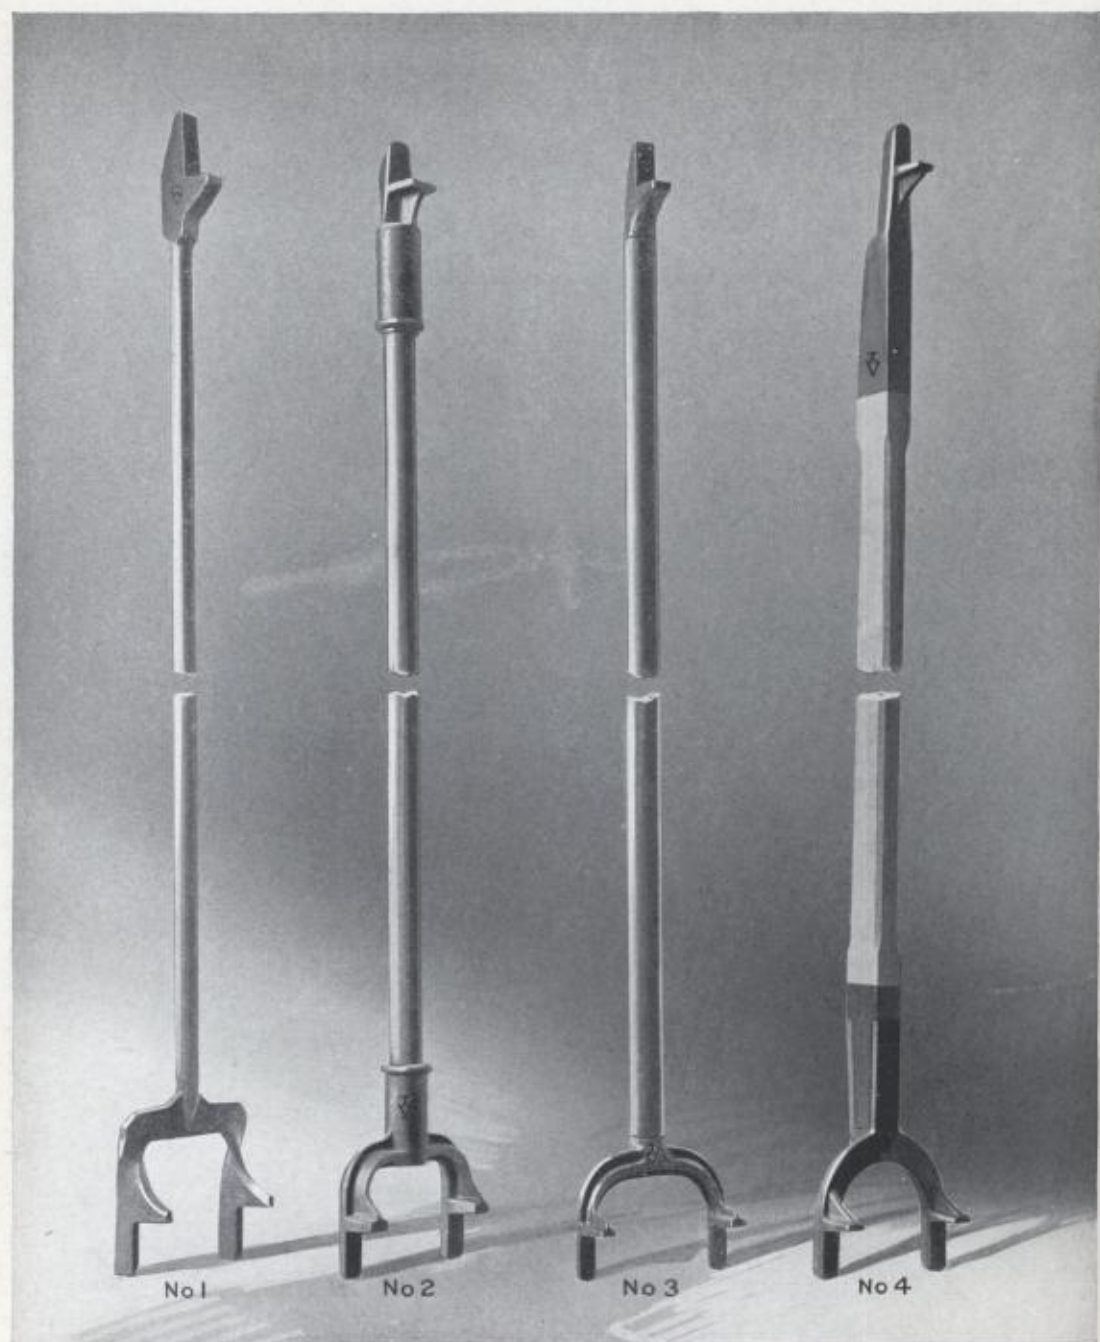

- No. 1. Solid Steel Gauge.  
No. 2. Insulated (with Fibre Bushing) Pipe Center Gauge.  
No. 3. Pipe Center Gauge (non-insulated).  
No. 4. Wood Center Gauge (Oak).



No 5



No 6




No 7




No. 8

- No. 5. Gauge with Guard Rail Lug. Wood center (Oak).  
No. 6. Radius Gauge, wood center (Oak).  
No. 7. Street Railway Gauge (Oak).  
No. 8. Insulated Pipe Center Gauge with Guard Rail Lug.



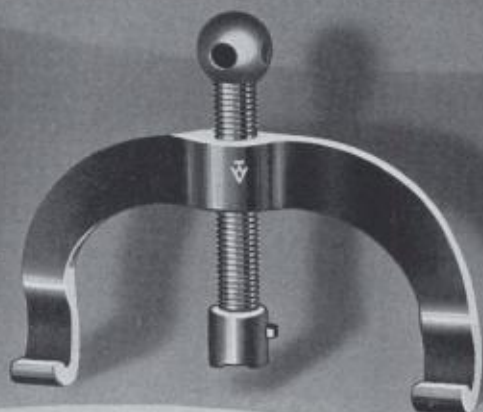


No 105

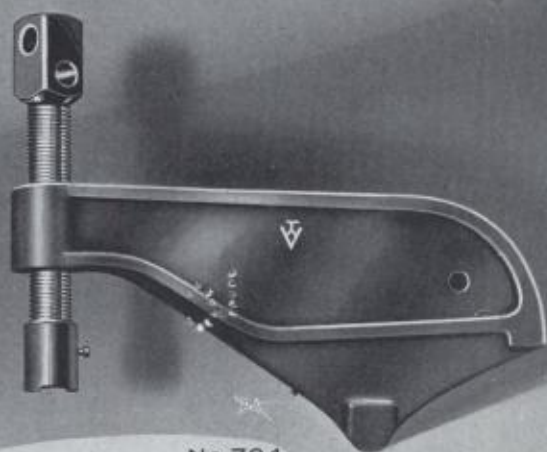

No 704


- No. 105. Jim Crow Bender. Made in six sizes: No. 0 for bending up to 16-pound rail; No. 1 for bending 16 to 25-pound rail; No. 2 for bending 25 to 45-pound rail; No. 3 for bending 45 to 65-pound rail; No. 4 for bending 65 to 85-pound rail; No. 5 for bending 85 to 100-pound rail.
- No. 704. Samson Style Bender. Made in three sizes. For bending rail up to 85-pounds, 85 to 100 pounds, 100 to 130 pounds.

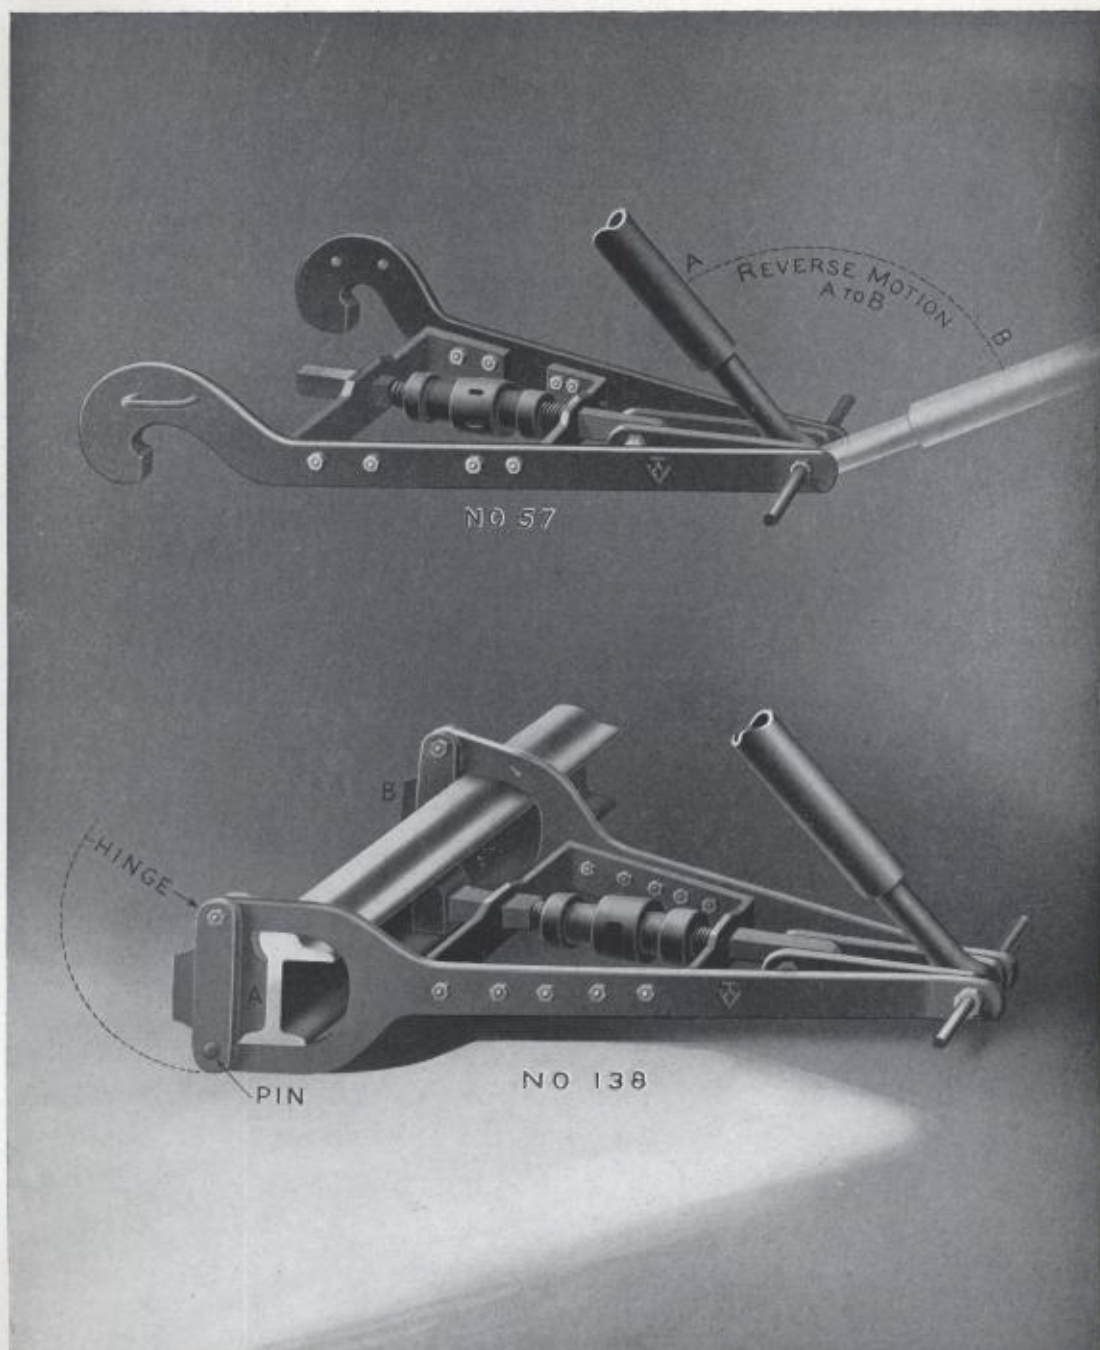

No. 57. Verona Eccentric Bender, for T rail. Operating lever made of pipe. Made in five sizes—16 to 25-pound rail, 25 to 45-pound rail, 45 to 65-pound rail, 65 to 85-pound rail, 85 to 100-pound rail.

This bender can be furnished with blocks for taking out surface bends.

No. 138. Eccentric Bender, for girder and guard rail. For any size or weight of rail. Send size or sketch of rail to be cured. NOTE: Plates A and B can be changed for any other section of rail.

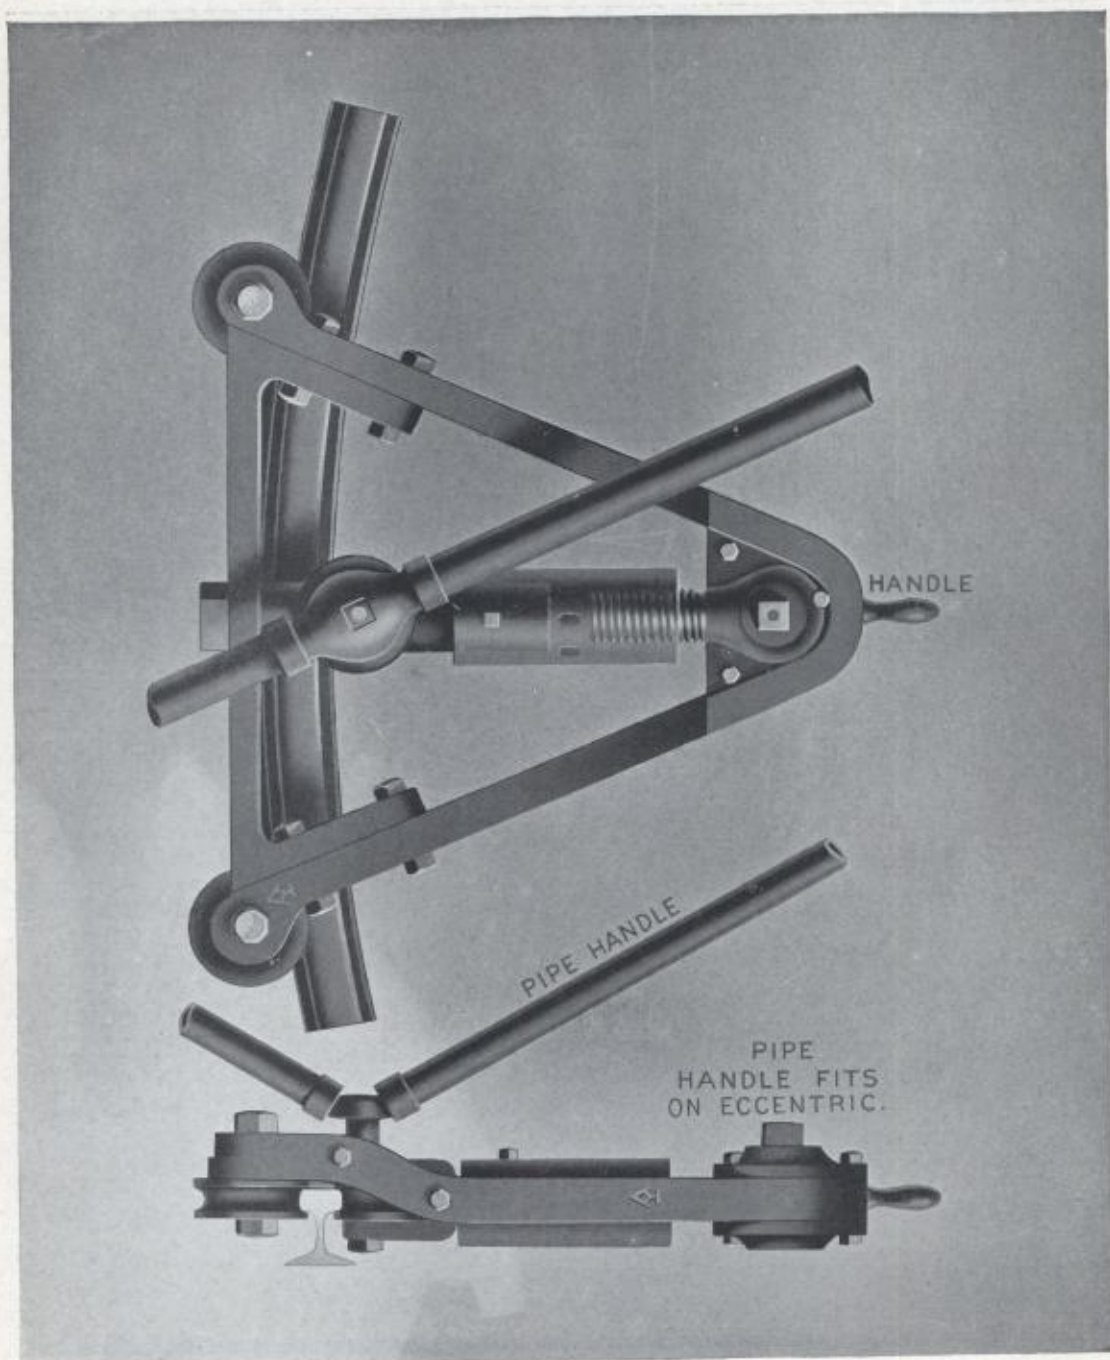

No. 139. Eccentric Roller Rail Bender and Curver. Made in three sizes: 45, 65, 85, 100 and 130-pound rail.



